



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : B65D 33/24, A44B 18/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/27721</p> <p>(43) International Publication Date: 18 May 2000 (18.05.00)</p>																							
<table style="width: 100%; border: none;"> <tr> <td style="width: 45%; vertical-align: top; border: none;"> <p>(21) International Application Number: PCT/US99/26261</p> <p>(22) International Filing Date: 5 November 1999 (05.11.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">09/187,389</td> <td style="width: 30%;">6 November 1998 (06.11.98)</td> <td style="width: 40%;">US</td> </tr> <tr> <td>09/293,257</td> <td>16 April 1999 (16.04.99)</td> <td>US</td> </tr> <tr> <td>60/159,489</td> <td>14 October 1999 (14.10.99)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">US</td> <td style="width: 30%;">09/293,257 (CIP)</td> <td style="width: 40%;"></td> </tr> <tr> <td>Filed on</td> <td>16 April 1999 (16.04.99)</td> <td></td> </tr> <tr> <td>US</td> <td>09/187,389 (CIP)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>6 November 1998 (06.11.98)</td> <td></td> </tr> </table> <p>(71) Applicant (for all designated States except US): VELCRO INDUSTRIES B.V. [NL/NL]; Castorweg 22-24, Curacao (AN).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): CLUNE, William [US/US]; 15 Currier Road, Concord, NH 03301 (US). SHEPARD, William, H. [US/US]; Seven Highland Drive,</p> </td> <td style="width: 55%; vertical-align: top; border: none;"> <p>Amherst, NH 03031 (US). PROVOST, George, A. [US/US]; 27 Brook Road, Litchfield, NH 03052 (US).</p> <p>(74) Agents: WILLIAMS, John, N. et al.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).</p> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> </td> </tr> </table>			<p>(21) International Application Number: PCT/US99/26261</p> <p>(22) International Filing Date: 5 November 1999 (05.11.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">09/187,389</td> <td style="width: 30%;">6 November 1998 (06.11.98)</td> <td style="width: 40%;">US</td> </tr> <tr> <td>09/293,257</td> <td>16 April 1999 (16.04.99)</td> <td>US</td> </tr> <tr> <td>60/159,489</td> <td>14 October 1999 (14.10.99)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">US</td> <td style="width: 30%;">09/293,257 (CIP)</td> <td style="width: 40%;"></td> </tr> <tr> <td>Filed on</td> <td>16 April 1999 (16.04.99)</td> <td></td> </tr> <tr> <td>US</td> <td>09/187,389 (CIP)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>6 November 1998 (06.11.98)</td> <td></td> </tr> </table> <p>(71) Applicant (for all designated States except US): VELCRO INDUSTRIES B.V. [NL/NL]; Castorweg 22-24, Curacao (AN).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): CLUNE, William [US/US]; 15 Currier Road, Concord, NH 03301 (US). SHEPARD, William, H. [US/US]; Seven Highland Drive,</p>	09/187,389	6 November 1998 (06.11.98)	US	09/293,257	16 April 1999 (16.04.99)	US	60/159,489	14 October 1999 (14.10.99)	US	US	09/293,257 (CIP)		Filed on	16 April 1999 (16.04.99)		US	09/187,389 (CIP)		Filed on	6 November 1998 (06.11.98)		<p>Amherst, NH 03031 (US). PROVOST, George, A. [US/US]; 27 Brook Road, Litchfield, NH 03052 (US).</p> <p>(74) Agents: WILLIAMS, John, N. et al.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).</p> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(21) International Application Number: PCT/US99/26261</p> <p>(22) International Filing Date: 5 November 1999 (05.11.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">09/187,389</td> <td style="width: 30%;">6 November 1998 (06.11.98)</td> <td style="width: 40%;">US</td> </tr> <tr> <td>09/293,257</td> <td>16 April 1999 (16.04.99)</td> <td>US</td> </tr> <tr> <td>60/159,489</td> <td>14 October 1999 (14.10.99)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">US</td> <td style="width: 30%;">09/293,257 (CIP)</td> <td style="width: 40%;"></td> </tr> <tr> <td>Filed on</td> <td>16 April 1999 (16.04.99)</td> <td></td> </tr> <tr> <td>US</td> <td>09/187,389 (CIP)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>6 November 1998 (06.11.98)</td> <td></td> </tr> </table> <p>(71) Applicant (for all designated States except US): VELCRO INDUSTRIES B.V. [NL/NL]; Castorweg 22-24, Curacao (AN).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): CLUNE, William [US/US]; 15 Currier Road, Concord, NH 03301 (US). SHEPARD, William, H. [US/US]; Seven Highland Drive,</p>	09/187,389	6 November 1998 (06.11.98)	US	09/293,257	16 April 1999 (16.04.99)	US	60/159,489	14 October 1999 (14.10.99)	US	US	09/293,257 (CIP)		Filed on	16 April 1999 (16.04.99)		US	09/187,389 (CIP)		Filed on	6 November 1998 (06.11.98)		<p>Amherst, NH 03031 (US). PROVOST, George, A. [US/US]; 27 Brook Road, Litchfield, NH 03052 (US).</p> <p>(74) Agents: WILLIAMS, John, N. et al.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).</p> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>			
09/187,389	6 November 1998 (06.11.98)	US																							
09/293,257	16 April 1999 (16.04.99)	US																							
60/159,489	14 October 1999 (14.10.99)	US																							
US	09/293,257 (CIP)																								
Filed on	16 April 1999 (16.04.99)																								
US	09/187,389 (CIP)																								
Filed on	6 November 1998 (06.11.98)																								
<p>(54) Title: TOUCH FASTENERS, THEIR MANUFACTURE, AND PRODUCTS INCORPORATING THEM</p> <div style="text-align: center; margin: 20px 0;"> </div>																									
<p>(57) Abstract</p> <p>Tough fasteners useful for bags, packaging and other products as well as novel manufacturing of products incorporating such fasteners are described. A composite touch fastener has an elongated, sheet-form resin substrate, a fibrous loop strip (104) partially encapsulated in, or otherwise permanently attached to, resin of the substrate, and an array of loop-engageable fastener elements (106) integrally molded with resin of the substrate. The loop strip forms a discrete band of hook-engageable, free-standing loops along the length of the substrate and has a substantially constant fiber density across its width. The array of fastener elements is arranged in a discrete band of fastener elements extending longitudinally along the substrate. The fastener product is useful as a repeated use bag closure, with a pair of grooves and a graspable rib (132) integrally molded into the substrate between the fastener elements and loops. The center portion of the closure seals the bag until it is torn away to expose the mating bands of loops and fastener elements. Methods and apparatus are disclosed for continuously molding the resin of the substrate while permanently attaching preformed material, such as loop material staked in discrete regions, to resin of the substrate, and for forming discrete bags incorporating the bag closure. Methods of applying recloseable touch fasteners, e.g. hook and loop fasteners, to sheet or film include vertical form and fill and horizontal form and fill packaging and pouch making.</p>																									

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TOUCH FASTENERS, THEIR MANUFACTURE, AND PRODUCTS
INCORPORATING THEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of pending U.S. Patent
5 Application Serial No. 09/293,257, filed April 16, 1999, which is itself a
continuation-in-part of pending U.S. Patent Application Serial No. 09/187,389,
filed November 06, 1998. This application also claims the benefit of our U.S.
Provisional Patent Application entitled "EASY-OPENING BAG CLOSURE",
filed October 14, 1999.

10 **BACKGROUND OF THE INVENTION**

This invention relates generally to touch fasteners, such as composite
touch fasteners having both loops and loop-engageable fastener elements
extending from one side of a common substrate, to their application in products
such as closure strips for reclosable bags, and to methods and apparatus for their
15 manufacture. This invention also relates to applying recloseable touch fasteners
strips to sheet or film, especially to flexible, disposable sheet or film for
packaging purposes, such as in vertical form and fill and horizontal form and fill
packaging and in pouch manufacture.

There has been much development over the last thirty years in the field of
20 hook-and-loop fasteners. Early touch fastener products of this type consisted of
two mating tapes, each being knit or woven. One tape would include loops of
filament woven into a base, and the other would include filaments woven to form
loops and then cut to form hooks. In some cases free ends of drawn plastic
filaments on the male tape would be melted to form protruding heads. This shape
25 of fastener element is sometimes called a "mushroom", to distinguish it from
"hook"-shaped elements with re-entrant crooks. In some cases, arrays of similar

discrete fastening elements on two parts are shaped to engage with each other to form a releasable closure, these being known as "self-engageable" hooks or closures.

More recently, continuous molding of fastener elements extending from a
5 common sheet-form resin base has resulted in less expensive and thinner male tapes. Significant improvements in this area include the development of continuous fastener tape molding using fixed mold cavities (see Fischer, U.S. Patent 4,794,028), and the ability to provide loops on the back side of the male fastener tape as the fastener tape substrate and elements are being formed (see
10 Kennedy et al., U.S. Patent 5,260,015), thus creating a composite fastener tape capable of fastening to itself. Further improvements have reduced the size of the fastener elements moldable by such techniques, to heights of 0.015 inch or less, which provide a very smooth touch when arranged in dense arrays.

Another example of molded fastener tape involves molding perform stems
15 or similar structures integral with a plastic backing substrate, and thereafter performing a forming operation to convert outer portions to a J hook, a mushroom head or similar engaging structure.

As molded fastener tape has been improved to be more flexible and less expensive, it has found application in disposable garments, such as diapers.
20 Further improvements are desirable to extend the applicability of molded touch fastener products to other uses.

One such use that is discussed in more detail below is as a closure for reclosable bags and other such packaging.

Other types of repeated use closures for bags have included, for instance,
25 rib-and-groove type of locking or zipper closures such as are marketed under the name ZIPLOC. These have very different fastening characteristics and exacting requirements for joining to sheet or film in comparison to the touch-fastener closures that are concerned here.

SUMMARY OF THE INVENTION

The invention features, in several of its aspects, a composite touch fastener product having both a band of loops and a band of hooks extending from a single face of a common, sheet-form substrate. Among other applications, this
5 product can be included at the opening of a bag to function as a repeated use closure.

According to one aspect of the invention, an elongated closure strip includes a sheet-form resin substrate having a front face a sheet-form resin substrate having a front face and a back face; an array of loop-engageable
10 fastener elements integrally molded with and extending from the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip; and a loop strip carried on the front face of the substrate and forming a discrete band of engageable loops extending along the length of the closure strip and spaced apart from the band of
15 fastener elements. The loop strip is arranged to be engaged by the array of fastener elements when the substrate is folded along a fold line extending between the loop strip and the array of fastener elements.

In some embodiments, the substrate has attachment regions extending along its length for permanently attaching the closure strip across a bag opening,
20 the attachment regions being devoid of fastener elements and loops. The attachment regions are disposed either on the front face or the back face of the substrate. In some cases the attachment regions are covered with a layer of adhesive for permanently attaching the closure strip across the bag opening. In some other cases the attachment regions comprise exposed resin of the substrate,
25 for permanently welding the closure strip to opposite sides of a bag formed of a compatible material.

In some embodiments the substrate defines at least one frangible region extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, for tearing the substrate between the
30 loops and the fastener elements, to open an associated bag. In some cases the frangible region comprises at least one longitudinal groove extending along the

substrate. In some configurations the frangible region comprises a pair of spaced apart, longitudinal grooves, and a longitudinal rib integrally molded with and extending from the substrate between the pair of grooves. The groove may be defined on either the front face or the back face of the substrate.

5 In some instances a longitudinal rib is integrally molded with and extends from the substrate adjacent the groove, on a side of the groove opposite the fold line, for resisting propagation of a tear from the groove away from the fold line.

 The frangible region may include an embedded longitudinally continuous filament adapted to be torn from the closure strip to tear the substrate along the
10 frangible region. In some cases the filament is completely enclosed within a longitudinal rib integrally molded with and extending from the substrate between the band of loops and the band of fastener elements. For some applications the longitudinal rib enclosing the filament is disposed on the back face of the substrate.

15 In some cases the longitudinal rib is offset from the fold line.

 In some embodiments, the loop strip comprises a non-woven web of entangled fibers forming the loops, preferably having a basis weight of less than about 4 ounces per square yard (more preferably, less than about 2 ounces per square yard). In some cases, the non-woven web comprises a needled web in a
20 stretched condition.

 In some embodiments, fibers of the loop strip are affixed to the substrate across the width of the loop strip, such as by being encapsulated by resin of the substrate. By "width" of the loop strip, we mean the entire transverse dimension of the preformed strip, as measured between the outermost edges of the
25 preformed strip before it is attached to the substrate.

 In many cases, the loop strip has a fiber density which is substantially constant across its width, yet the loop strip has discrete regions which are more encapsulated by resin than other regions of the loop strip. These discrete, more encapsulated regions may be spaced apart longitudinally along the loop strip,
30 extend lengthwise along the loop strip and be spaced apart widthwise, or be arranged in a checkerboard pattern, for instance.

When we refer to regions of the loop strip as being more "encapsulated" than other regions, we mean that the fibers of the more encapsulated regions are generally more thoroughly embedded in the resin of the substrate than the fibers of other regions. Generally, this will involve a deeper penetration of the substrate resin into the loop strip.

In some embodiments, longitudinal edge regions of the loop strip are affixed to the substrate, while a center region (between the edge regions) is substantially loose from the substrate. The center region of the loop strip may advantageously define a gentle arc extending away from the substrate in some of these embodiments.

In some configurations, a barrier layer (of a different material than the substrate) is included between the substrate and the loop strip. This barrier layer may be of paper or a polymer resin, for example.

In some cases the loop strip has at least one edge which is substantially loose from the substrate. This edge may be either an inner or outer edge in a finished bag, and can help to redirect peel separation forces to enhance the peel strength of the fastening.

In some closure strips, open-ended pockets are defined between an edge of the loop strip and the substrate. These pockets can also help to enhance peel strength in some cases.

In some embodiments, the edge regions of the loop strip have fibers directly encapsulated within resin of the substrate, while the closure strip also includes a binder (of a different material than the substrate) connecting fibers of the center region (between the edge regions) of the loop strip to resin of the substrate.

The substrate of some embodiments of the closure strip is advantageously formed of the same material as the substrate, e.g. enabling welding the substrate to the bag material. Such material can for instance be polypropylene, polyester or nylon, chosen for their excellent barrier qualities (as well as polyethylene which has poor barrier qualities), and copolymers and compatible mixtures that include at least one of such resins.

Some embodiments of the closure strip also include an adhesive strip carried on the front face of the substrate between the band of fastener elements and the band of loops. The adhesive strip has an exposed surface arranged to contact the front face of the closure strip when the closure strip is folded to engage the loops with the fastener elements, to retain the closure strip in a folded state.

Alternatively, some embodiments have a first adhesive strip carried on the front face of the substrate between the band of fastener elements and the pair of grooves, and a second adhesive strip carried on the front face of the substrate between the band of loops and the pair of grooves. The first and second adhesive strips have exposed surfaces arranged to contact each other when the closure strip is folded to engage the loops with the fastener elements, to retain the closure strip in a folded state. In either case, these adhesive strips can advantageously provide an air-tight seal when the closure is closed.

In some cases the closure strip includes a strip of peelable adhesive carried on the front face of the substrate for providing a peelable seal across the opening of an associated bag. For some applications the strip of peelable adhesive is disposed between a longitudinal edge of the closure strip and both of the bands of fastener elements and loops. In some other applications the strip of peelable adhesive is disposed between the bands of fastener elements and loops.

In some embodiments, the closure strip includes a layer of paper permanently adhered to the substrate. In some cases, this layer of paper is carried on the front face of the substrate, in its longitudinal edge regions. In some cases, the paper is carried on the back face of the substrate. In some other cases, the layer of paper is disposed between a center region of the loop strip and the substrate.

In some embodiments the closure strip includes a second array of loop-engageable fastener elements integrally molded with and extending from the back face of the substrate and forming a second band of fastener elements extending longitudinally along the length of the closure strip, for hanging an associated package for display. In some cases a second loop strip is carried on the back face

of the substrate and forms a second discrete band of engageable loops spaced apart from the second band of fastener elements, for engaging the second band of fastener elements of another package.

In some cases a second loop strip carried on the back face of the substrate
5 and forms a second discrete band of engageable loops extending along the length of the closure strip, for hanging an associated package for display.

In some embodiments the substrate further defines multiple longitudinal rows of hump-shaped projections extending from its front face between the fold line and each of the bands of loops and fastener elements.

10 According to a second aspect of the invention, an elongated closure strip includes a sheet-form resin substrate having front and back faces, a loop strip carried on the front face of the substrate, and an array of loop-engageable fastener elements carried on the front face of the substrate. The loop strip forms a discrete band of hook-engageable, free-standing loops along the length of the closure
15 strip, and the array of fastener elements forms a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops. The substrate defines a pair of grooves extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, and a longitudinal rib integrally molded with and
20 extending from the substrate between the pair of grooves.

According to a third aspect of the invention, an elongated closure strip includes a sheet-form resin substrate having front and back faces, a loop strip carried on the front face of the substrate, and an array of loop-engageable fastener elements carried on the front face of the substrate. The loop strip forms a discrete
25 band of hook-engageable, freestanding loops along the length of the closure strip, and the array of fastener elements forms a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops. The loop strip has width and a fiber density that is substantially constant across its width, and is at least partially encapsulated in
30 resin of the substrate across its width, with the loop strip having discrete regions which are more encapsulated by resin than other regions of the loop strip.

According to a fourth aspect of the invention, a reclosable bag includes a bag body and an elongated closure strip. The bag body has two opposing side walls joined along three edges to form therebetween a pouch having an open end. The closure strip is permanently affixed to the two side walls of the bag body
5 along the open end, and includes a sheet-form resin substrate having a front and a back face; an array of loop-engageable fastener elements integrally molded with and extending from the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip; and a loop strip carried on the front face of the substrate and forming a discrete
10 band of engageable loops extending along the length of the closure strip and spaced apart from the band of fastener elements. The loop strip is arranged to be engaged by the array of fastener elements to releasably retain the bag in a closed condition.

In some preferred embodiments the substrate is continuous and solid
15 between the band of loops and the band of fastener elements and forms a seal to retain the bag in a sealed condition before the bag is opened.

In some embodiments, the substrate of the closure strip is permanently affixed to the side walls of the bag body with adhesive. In some other embodiments, the substrate of the closure strip is welded to the side walls of the
20 bag body. The substrate of the closure strip and the side walls of the bag body may both be formed of the same resin, for instance, including, polyethylene and, in cases involving barrier films and sheets, polypropylene, polyester and nylon, and copolymers and compatible mixtures that include such resins.

In some cases the resin of the sheet or film packaging material or the resin
25 of the backing substrate of a closure strip to be joined to the packaging material, or both, includes an additive in the resin blend or a discrete outer layer, as by coextrusion, of a material that contributes to weldability of the matching surfaces. Such additives include for instance an ionomer such as marketed by duPont under the mark surlyn™, or an ethylene vinyl acetate (EVA) additive
30 which lowers the weld temperature, or a material known as metallocene which is used to sharpen or adjust the melting range of materials to be welded together.

For some applications the substrate of the closure strip defines at least one frangible region extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, for tearing the substrate between the loops and the fastener elements to open the bag. The
5 frangible region may include, for instance, at least one longitudinal groove extending along the substrate. In some cases the frangible region comprises a pair of spaced apart, longitudinal grooves, and a longitudinal rib integrally molded with and extending from the substrate between the pair of grooves.

In some other cases the frangible region has an embedded, longitudinally
10 continuous filament adapted to be torn from the closure strip to tear the substrate along the frangible region. The filament may be fully enclosed within a longitudinal rib extending from the back face of the substrate of the closure strip and disposed inside the bag, for example. In some bags the filament has an end attached to a pull tab extending from one edge of the bag. In some other bags a
15 slit is defined through an edge region of the bag but not extending into the interior of the bag, the slit defining a graspable pull tab within the edge region and containing an end of the filament. The pull tab may also be defined between a pair of slits on either side of the filament and extending through an adjacent edge of the bag.

20 In some embodiments the loop strip of the closure strip comprises a non-woven web of fibers having a basis weight of less than about 4 ounces per square yard.

In some applications a strip of peelable adhesive is carried on the front face of the substrate for providing a peelable seal across the opening of the bag.
25 The peelable seal may be disposed either inboard or outboard of the bands of loops and fastener elements.

In some embodiments the back face of the closure strip forms an outer surface of the bag, with the bands of loops and fastener elements carried on an inner surface of the bag.

30 In some bags the closure strip also has a second array of loop-engageable fastener elements integrally molded with and extending from the back face of the

substrate and forming a second band of fastener elements extending longitudinally along the outer surface of the bag, for hanging the bag for display. The closure strip may also include a second loop strip carried on the back face of the substrate and forming a second discrete band of engageable loops extending
5 along the outer surface of the bag, for hanging the bag for display.

In some cases the front face of the closure strip forms an outer surface of the bag, with the bands of loops and fastener elements carried on said outer surface of the bag. Both the band of loops and the band of fastener elements may be disposed on a front side of the bag, for example, such that the fastener
10 elements engage the loops when an adjacent edge of the bag is folded over. Preferably, the substrate of the closure strip defines a frangible region between the bands of loops and fastener elements, the frangible region running along one side of the bag and configured to be torn to open the bag.

For some consumer applications this frangible region is configured to be
15 torn by applying a transverse tensile load across the frangible region, such that the frangible region is burst to gain access to the bag. The load may be applied by grasping the bag on either side of the frangible region, for example, and then separating the hands to tear the frangible region. Preferably, the frangible region of the substrate is weaker with respect to a transverse tensile load than the side
20 walls of the bag and the attachment between the side walls of the bag and the bag closure.

The side wall forming the front side of the bag may have an exposed tab, for example, for grasping and pulling the front side of the bag to tear the frangible region of the closure strip. This tab may extend across the front side of
25 the bag.

In some embodiments the bands of loops and fastener elements are disposed on opposite sides of the bag, such that the fastener elements engage the loops when an adjacent edge of the bag, formed by a fold in the closure strip, is folded over twice. In some cases, adjacent layers of the substrate together form a
30 barrier to fluids with the closure strip folded over twice.

In some applications the side walls of the bag are attached to the closure strip along the back face of the closure strip. In some cases, one edge of the bag is formed by a fold along the substrate of the closure strip between the bands of loops and fastener elements. In some other cases, the substrate forms a fold
5 between the bands of fastener elements and loops, with the fold of the substrate directed toward the interior of the bag. The substrate may be solid and continuous between the side walls of the bag, to form a seal across the bag opening until the bag is initially opened. The side walls of the bag may be joined together outboard of the longitudinal edges of the closure strip to form a seal until
10 the bag is initially opened.

Advantageously, in some embodiments at least one longitudinal edge of the closure strip is disposed inside the bag and unattached to the sides of the bag, except at the edges of the bag.

The substrate of the closure strip carries printed indicia in some
15 applications.

Also, in some applications the substrate of the closure strip defines a hole forming a graspable handle for carrying the bag.

According to a fifth aspect of the invention, a reclosable bag includes a bag body having two opposing side walls joined along three edges to form a
20 pouch having an open end, and a closure strip permanently affixed to the two side walls of the bag body along the open end. The closure strip includes a sheet-form resin substrate having a front face, a loop strip carried on the front face of the substrate, and an array of loop-engageable fastener elements carried on the front face of the substrate. The loop strip forms a discrete band of hook-engageable,
25 free-standing loops along the length of the closure strip, and the array of loop-engageable fastener elements forms a discrete band of fastener elements extending longitudinally along the length of the closure strip and arranged to engage the band of loops to releasably retain the bag in a closed condition when the opposing sides of the bag body are pressed together at the open end. The
30 substrate defines a pair of grooves extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, the

pair of grooves spaced apart to define between them a band of substrate resin for retaining the bag in a closed condition until the closure strip is torn along the pair of grooves. The substrate also defines a longitudinal rib integrally molded with and extending from the substrate between the pair of grooves, the rib having
5 thickness and arranged to be grasped between adjacent regions of the substrate and pulled to tear the closure strip along the pair of grooves.

According to a sixth aspect of the invention, a continuous sheet-form product useful for forming bags includes a continuous sheet-form film and a length of closure strip permanently bonded to the film. The closure strip includes
10 a sheet-form resin substrate having an exposed front face; a loop strip carried on the front face of the substrate and comprising a discrete band of hook-engageable loops extending along the length of the closure strip; and an array of loop-engageable fastener elements integrally molded with resin of the front face of the substrate and forming a discrete band of fastener elements extending
15 longitudinally along the length of the closure strip and spaced apart from the band of loops.

The closure strip, in some applications, is continuous and extends along the film centerline. In some other applications the closure strip is continuous and extends along one edge of the film.

20 In some cases the closure strip extends transversely across the film.

According to a seventh aspect of the invention, a continuous sheet-form product useful for forming bags includes a continuous sheet-form film and multiple lengths of closure strip extending transversely across the film at spaced intervals and permanently bonded to the film. Each length of closure strip
25 includes two overlapping substrates, with each substrate bonded separately to the bag film on opposite sides of an associated frangible region of the film; a loop strip carried on the front face of the first substrate and comprising a discrete band of engageable loops extending along the length of the closure strip; and an array of loop-engageable fastener elements extending from the second substrate and
30 forming a discrete band of fastener elements extending longitudinally along the length of the closure. The first and second substrates are overlapped as bonded to

the film such that the bands of loops and fastener elements overlap for engagement.

Preferably, the fastener elements are integrally molded with resin of the front face of the second substrate.

5 According to an eighth aspect of the invention, a method of fabricating a closure strip is provided. The method includes the steps of molding a continuous, sheet-form substrate having a band of fastener elements integrally molded with and extending from a front face of the substrate; and attaching a continuous strip of loop material to resin forming the front face of the substrate to form a discrete
10 band of loops spaced apart from the band of fastener elements.

In some cases the step of molding includes forming the substrate to have a longitudinal frangible section arranged to be disposed between the band of loops and the band of fastener elements. The frangible section of the substrate may define, for example, at least one longitudinally extending groove, with the
15 molding step including forming the groove in the substrate as the substrate is formed. The groove may be formed in the front or back face of the substrate.

In some instances the frangible section defines a pair of longitudinally extending grooves in the substrate, and the step of molding may also include simultaneously forming a longitudinal rib extending from the substrate between
20 the grooves.

In some cases the step of molding includes simultaneously forming a longitudinal rib extending from the substrate, the rib arranged to be disposed between the bands of fastener elements and loops. The rib, in some instances, is molded to be closer to one than the other of the bands of fastener elements and
25 loops.

The step of molding, for some applications, includes simultaneously embedding a longitudinally continuous filament in resin of the substrate. The filament may be completely enclosed by resin of a rib extending from one face of the substrate, for example.

In some preferred applications of the method of the invention, the strip of loop material comprises a non-woven web of entangled fibers forming the loops and having a basis weight of less than about 4 ounces per square yard.

In some embodiments the step of attaching includes encapsulating fibers
5 of the strip of loop material in resin of the substrate across the width of the strip of loop material.

The strip of loop material, in some cases, has a fiber density which is substantially constant across its width, and the step of attaching includes permanently bonding discrete regions of the strip of loop material to the substrate
10 while leaving other regions of the strip of loop material in a less bonded condition.

In some embodiments the strip of loop material is permanently attached to the substrate after the substrate is molded, such as by heating the front face of the substrate and then pressing the loop material against the front face of the
15 substrate with the front face of the substrate at an elevated temperature.

In other embodiments the strip of loop material is permanently attached to the substrate as the substrate is molded. In some such cases the steps of molding and attaching include continuously feeding the strip of loop material through a nip defined between a rotating mold roll and a pressure roll, the rotating mold roll
20 defining a multiplicity of cavities about its periphery for molding the fastener elements, while continuously introducing molten resin to the mold roll under conditions which cause the resin to fill the cavities and form the substrate, such that pressure in the nip bonds the strip of loop material to resin of the substrate.

In some configurations the mold roll has two extending ridges that form a
25 pair of grooves in the substrate. The step of molding may also include simultaneously forming a longitudinal rib extending from the substrate between the pair of grooves, the mold roll defining, between its two ridges, a channel for forming the longitudinal rib.

In some instances the steps of molding and attaching include continuously
30 feeding the strip of loop material through a gap defined between a rotating mold roll and a stationary extrusion head, the rotating mold roll defining a multiplicity

of cavities about its periphery for molding the fastener elements, while continuously introducing molten resin to the gap under conditions which cause the resin to fill the cavities and form the substrate and to permanently adhere to the strip of loop material.

5 In some embodiments the method also includes, while continuously feeding the strip of loop material through the gap, continuously feeding a strip of preformed material through the gap between the strip of loop material and the extrusion head, such that the preformed material inhibits the encapsulation of fibers of the strip of loop material in predetermined regions and the preformed
10 material is incorporated into the closure strip. This preformed material is preferably selected from the group consisting of paper, fabric and plastic film, and may have perforations through it for allowing heavier penetration of substrate resin in some predetermined areas.

 In some cases the steps of molding and attaching include continuously
15 feeding the strip of loop material through a nip defined adjacent the periphery of a rotating mold roll, the mold roll comprising at least one staking ring having a contoured outer edge and arranged to hold a predetermined region of the strip of loop material against the resin under pressure in the gap. The outer edge of the staking ring may have protrusions spaced about its periphery, for example, with
20 the protrusions corresponding to discrete regions of relatively greater encapsulation of the strip of loop material. Preferably, the mold roll comprises multiple staking rings arranged to produce a predetermined bonding pattern across the strip of loop material.

 According to a ninth aspect of the invention, a method of fabricating a
25 closure strip is provided. The closure strip is in the form of a sheet-form resin substrate having a front face, with both a loop strip and an array of loop-engageable fastener elements carried on the front face of the substrate. The loop strip has width and forms a discrete band of hook-engageable, extended loops along the length of the closure strip. The array of loop-engageable fastener
30 elements forms a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops, the

- substrate having a frangible section between the band of loops and the band of fastener elements. The method includes the steps of molding a continuous, sheet-form substrate having both a band of fastener elements integrally molded with and extending from its front face, and a frangible section, and attaching a
- 5 continuous strip of loop material to resin forming the front face of the substrate to form a band of loops, with the frangible section of the substrate disposed between the band of loops and the band of fastener elements.

According to a tenth aspect of the invention, a method of fabricating reclosable bags is provided. The method includes the steps of:

- 10 a) providing a continuous length of sheet-form bag wall material;
- b) providing a continuous closure strip comprising a sheet-form resin substrate having a front face; a loop strip carried on the front face of the substrate and forming a discrete band of engageable loops along the length of the closure strip; and an array of loop-engageable fastener elements integrally molded with
- 15 the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops;
- c) permanently attaching the closure strip along the sheet-form bag wall material to form a continuous length of preform bag material; and then
- 20 d) forming individual bags from the preform bag material.

In some embodiments the step of attaching produces a preform tube of bag material, and the steps of attaching and forming are performed simultaneously in a vertical form and fill process, with the individual bags containing a predetermined quantity of material to be stored in the bags.

- 25 In some applications, the closure strip is attached to longitudinal edges of the sheet-form plastic to form a fin seal of the preform tube.

In some cases the closure strip is folded to form a fold extending outward, away from the preform tube. The fold defines a distal edge of the fin seal in some of these cases.

- 30 In some other cases the closure strip is folded to form a fold extending inward, toward the preform tube.

In some embodiments the step of attaching produces a preform tube of bag material. The steps of attaching and forming are performed simultaneously in a horizontal form and fill process, with the individual bags formed about associated packages of material. In some preferred arrangements longitudinal edges of the bag side wall material are brought together to form a fin seal with the closure strip folded longitudinally and disposed within the fin seal. In some other applications longitudinal edges of the bag side wall material are brought together in a fin seal with the closure strip folded longitudinally about and attached to the longitudinal edges of the bag side wall material.

10 In some embodiments the step of attaching includes folding the closure strip along its length to engage the bands of loops and fastener elements in an engagement zone, the loops and fastener elements holding their underlying regions of the substrate in spaced apart relation. In some of these cases the step of attaching further includes welding the bag side wall material to the back face of the substrate, the engagement zone providing a heat barrier to inhibit permanently welding the substrate together in its folded condition.

In some cases the step of forming includes folding the preform bag material along its centerline and then forming transverse seals spaced along the preform bag material at bag length intervals to form a chain of open-ended bags.

20 The closure strip may be attached along the bag side wall material between longitudinal edges of said material, for instance, with the preform bag material being subsequently folded at the closure strip to engage the bands of loops and fastener elements.

25 In some applications the step of attaching includes individually folding the bag side wall material and the closure strip, and then joining the folded wall material and closure strip along their longitudinal edges to form a continuous tube of preform bag material. In some of these applications the step of forming includes creating transverse seals across the tube of preform bag material to form a series of discrete, empty bags.

30 In some embodiments the bag side wall material is provided as two separate material sheets, the step of attaching including attaching the closure strip

to one longitudinal edges of each sheet, such that the preform bag material comprises the two material sheets joined at the closure strip. The step of forming individual bags includes forming transverse seals across the preform bag material and joining the other longitudinal edges of the sheets of material to form a series
5 of sealed bags.

In some instances the closure strip contains an embedded pull cord, and the step of forming includes forming a graspable pull tab extending from an edge of each bag, with the pull tab containing an end of the pull cord. The graspable pull tab may be formed by slitting each bag in a side seal area of the bag, for
10 instance. Alternatively, the slitting may cut through the pull cord but not extend into the interior of the bag. The slitting forms, in some cases, two slits extending from an adjacent edge of the bag to the filament.

According to an eleventh aspect of the invention, a method of fabricating reclosable bags is provided. The method includes the steps of:

- 15 (a) providing a continuous length of sheet-form plastic, folded along its length and having two exposed longitudinal edges;
- (b) providing a continuous closure strip folded along its length and having two exposed longitudinal edges (the closure strip having a sheet-form resin substrate with a front face, a loop strip carried on the front face of the substrate
20 and forming a discrete band of hook-engageable, free-standing loops along the length of the closure strip, and an array of loop-engageable fastener elements integrally molded with the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops, as described above);
- 25 (c) permanently attaching the longitudinal edges of the sheet-form plastic to the longitudinal edges of the closure strip to form a continuous preform tube; and
- (d) forming sealed individual bags from the preform tube.

In some embodiments, the step of forming sealed individual bags includes
30 cutting the continuous preform tube to predetermined lengths (each cut length comprising a section of closure strip and a section of sheet-form plastic), sealing

a first open end of each cut length of preform tube, and sealing a second open end of each cut length of preform tube to form a sealed bag. In many cases, between the steps of sealing the first and second open ends, each cut length of preform tube is filled with material to be stored in the sealed bag.

5 In some embodiments, the step of forming sealed individual bags includes:

(d1) sealing the tube at a sealing point spaced from one end of the tube to form an end pouch with a single opening;

(d2) filling the end pouch with material;

10 (d3) sealing the single opening of the end pouch to form a sealed bag containing the material;

(d4) separating the sealed bag from the tube by severing the tube below the sealing point;

(d5) advancing the tube; and

15 (d6) repeating steps (d1) through (d5).

In some embodiments, the substrate of the closure strip defines a pair of grooves extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, with the pair of grooves spaced apart to define between them a band of substrate resin for retaining the bag in a closed condition until the closure strip is torn along the pair of grooves.

20 According to a twelfth aspect of the invention, a composite touch fastener has an elongated, sheet-form resin substrate with a front face, a fibrous loop strip partially encapsulated in resin of the front face of the substrate, and an array of loop-engageable fastener elements integrally molded with resin of the front face of the substrate. The loop strip forms a discrete band of hook-engageable, freestanding loops along the length of the substrate, the loop strip having a substantially constant fiber density across its width between its two longitudinal edges. The array of loop-engageable fastener elements forms a discrete band of fastener elements extending longitudinally along the substrate.

30 In some embodiments, the loop strip comprises a non-woven web of entangled fibers forming the loops. Preferably, the web has a basis weight of less

than about 4 ounces per square yard (more preferably, less than about 2 ounces per square yard). The non-woven web may be in the form of a needled web in a stretched condition, for instance.

According to a thirteenth aspect of the invention, a composite touch
5 fastener includes an elongated, sheet-form resin substrate, a fibrous loop strip partially encapsulated in resin of the substrate, with the loop strip having discrete regions, which are substantially more encapsulated by resin than other regions thereof, and an array of loop-engageable fastener elements integrally molded with resin of the substrate.

10 In some embodiments, the loop strip has a substantially constant fiber density across its width.

In some cases, the strip of loop material has regions of substantially higher loft than regions corresponding to the discrete regions that are substantially more encapsulated by resin.

15 By "loft", we mean the distance the exposed loops of the loop material extend from the front face of the substrate, as presented for engagement by fastener elements.

In some embodiments, the strip of loop material comprises a non-woven web of entangled fibers forming the loops and having a basis weight of less than
20 about 4 ounces per square yard.

According to a fourteenth aspect of the invention, a method of fabricating a composite touch fastener is provided. The composite touch fastener is in the form of an elongated, sheet-form resin substrate having a front face, with both a loop strip and an array of loop-engageable fastener elements carried on the front
25 face of the substrate. The loop strip has width and forms a discrete band of hook-engageable, exposed loops extending longitudinally along the substrate. The array of loop-engageable fastener elements forms a discrete band of fastener elements extending longitudinally along the length of the substrate. The method includes the steps of molding a continuous, sheet-form substrate having a band of
30 fastener elements integrally molded with and extending from its front face, and

attaching a continuous strip of loop material to resin forming the front face of the substrate to form a band of loops.

Preferably, the strip of loop material comprises a non-woven web of entangled fibers forming the loops and having a basis weight of less than about 4
5 ounces per square yard (more preferably, less than about 2 ounces per square yard).

In some embodiments, the strip of loop material has a fiber density that is substantially constant across its width, yet the step of attaching permanently bonds discrete regions of the strip of loop material to the substrate while leaving
10 other regions of the strip of loop material in a less bonded condition.

In some cases, the strip of loop material is permanently attached to the substrate as the substrate is molded. For instance, in some preferred methods, the steps of molding and attaching include continuously feeding the strip of loop material through a gap defined adjacent a rotating mold roll (defining a
15 multiplicity of cavities about its periphery for molding the fastener elements), while continuously introducing molten resin to the mold roll under conditions which cause the resin to fill the cavities and form the substrate, such that pressure in the gap bonds the strip of loop material to resin of the substrate.

In some cases, the gap is a nip defined between the mold roll and a
20 pressure roll.

In some other cases, the gap is defined between the mold roll and a fixed extrusion head.

In some embodiments, the mold roll contains at least one staking ring having a contoured outer edge, the staking ring arranged to hold a predetermined
25 region of the strip of loop material against the resin under pressure in the gap.

In one presently preferred configuration, the outer edge of the staking ring has protrusions spaced about its periphery, the protrusions corresponding to discrete regions of relatively greater encapsulation of the strip of loop material.

In some cases, the mold roll has multiple staking rings arranged to
30 produce a predetermined bonding pattern across the strip of loop material.

According to a fifteenth aspect of the invention, a method of fabricating a composite touch fastener is provided. The touch fastener is in the form of an elongated sheet-form resin substrate carrying both a preformed material and an array of loop-engageable fastener elements integrally molded with the substrate.

- 5 The method includes molding a continuous, sheet-form substrate having a band of fastener elements integrally molded with and extending from the substrate, by continuously introducing molten resin to a gap defined adjacent a rotating mold roll defining a multiplicity of cavities about its periphery for molding the fastener elements, under conditions which cause the resin to fill the cavities and form the
- 10 substrate, while permanently attaching a continuous strip of preformed material to resin of the substrate in a nip defined between the mold roll and a pressure roll, by causing pressure variations within the nip. The pressure variations result in regions of relatively high penetration of substrate resin into the preformed material and regions of relatively low penetration of substrate resin into the
- 15 preformed material.

In some preferred embodiments, the mold roll has protrusions extending radially into the nip, for causing local increases in nip pressure that correspond to the regions of relatively high penetration of substrate resin.

- In some embodiments, the pressure roll has protrusions extending radially
- 20 into the nip, the protrusions causing local increases in nip pressure that correspond to the regions of relatively high penetration of substrate resin.

In some cases, the gap and the nip are coextensive. In some other cases, the gap is defined between the mold roll and a fixed extrusion head.

- In some embodiments, the regions of relatively high penetration of
- 25 substrate resin into the preformed material are arranged in a checkerboard pattern along the strip of preformed material.

- In some configurations, the array of fastener elements is disposed on a front face of the substrate and the strip of preformed material is attached to a back face of the substrate. The preformed material is, in some embodiments,
- 30 coextensive with the back face of the substrate.

In some other configurations, the strip of preformed material and the array of fastener elements are both disposed on a common side of the substrate.

In some embodiments, the strip of preformed material comprises a strip of loop material having exposed loops arranged for releasable engagement by the
5 fastener elements.

According to a sixteenth aspect of the invention, an apparatus for fabricating a composite touch fastener is provided. The composite touch fastener, as described above, is in the form of an elongated sheet-form resin substrate having a front face, a loop strip carried on the front face of the substrate (the loop
10 strip having width and forming a discrete band of hook-engageable, extended loops along the length of the touch fastener), and an array of loop-engageable fastener elements carried on the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the substrate. The apparatus includes a rotating mold roll defining a multiplicity of fixed cavities
15 about its periphery for molding the fastener elements, means of supplying molten resin to the mold roll under conditions which cause the resin to fill the cavities and form the substrate, means of supplying a continuous strip of loop material between the molten resin and the mold roll under conditions which cause the strip of loop material to permanently bond to the front face of the substrate, and means
20 of stripping the fastener elements from the cavities. The "means" elements of the apparatus will be understood to be those discussed or represented schematically herein or in the disclosures incorporated by reference, and their equivalents.

According to a seventeenth aspect of the invention, a method of fabricating reclosable bags in a vertical form and fill process is provided. The
25 method includes the steps of:

- a) unrolling a continuous length of sheet-form bag film and directing the unrolled film over a forming head, advancing the bag film one bag length between pauses;
- b) during each pause, attaching a length of closure strip across the
30 unrolled bag film upstream of the forming head, each length of closure strip comprising a sheet-form resin substrate having a front face; a loop strip carried

on the front face of the substrate and forming a discrete band of engageable loops along the length of the closure strip; and an array of loop-engageable fastener elements integrally molded with the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops; and

5 c) forming individual bags from the bag film, each bag having an associated length of closure strip.

According to an eighteenth aspect of the invention, a horizontal form/fill packaging machine is provided. The machine includes means for forming a continuous tube from a sheet of film (the tube having an extending flange formed by opposite edge regions of the film brought together in face-to-face relation), means for introducing a reclosable closure strip to the flange of the tube, means for sealing the closure strip to the edge regions of the film, means for inserting discrete items to be packaged into the tube, and means for severing and sealing the tube between adjacent items to form individual packages containing the items.

10

15

According to a nineteenth aspect of the invention, a reclosable roll-top bag has a closure strip sealed along an upper end of the bag. The closure strip has a substrate defining at least one frangible region to be severed to open the bag, a band of hook elements extending from the closure strip and disposed on one side of the bag, and a band of loop material carried on the substrate on an opposite side of the bag. When the upper end of the bag is folded over upon itself in a predetermined arrangement, the band of hook elements releasably engages the band of loop material to form a releasable fastening, with adjacent layers of the substrate together forming a barrier to fluids.

20

25

According to a twentieth aspect of the invention, a reclosable bag has a closure strip having parallel hook and loop bands extending from an outer surface thereof and separated by a frangible region, such that the bag, after being opened by severing the frangible region, is adapted to be reclosed by folding the bag about the frangible region to place the hook and loop bands in releasable engagement.

30

According to a twenty first aspect of the invention, a method of fabricating a closure strip includes molding a continuous, sheet-form substrate having a band of fastener elements integrally molded with and extending from a front face of the substrate, and attaching a continuous strip of loop material to
5 resin forming the front face of the substrate to form a discrete band of loops spaced apart from the band of fastener elements.

According to a twenty-second aspect of the invention, a method of forming a bag or package of disposable flexible packaging film or sheet having a surface of predetermined thermoplastic composition is provided. The method
10 includes providing inter-engageable closure strip portions which are either separate strips or strip portions of a common member, and joining the backing of said strip portions to respective portions of the surface of said plastic film or sheet by welding. The strip portions are either separate strips or strip portions of a common member. At least a first of the closure strip portions provides an array
15 of discrete fastener elements such as hook elements having crooks or hook elements of mushroom form, the fastener elements having stems integrally molded with and extending from a thermoplastic backing substrate. The other of the strip portions provides an array of engageable elements such as loops or fibers, or elements self-engageable with fastener elements of the first strip
20 portion, such that the elements of the strip portions are capable of forming a releasable closure. Each of the strip portions has a backing surface comprised substantially of the predetermined thermoplastic composition of which the surface of the film is formed.

In some cases, during welding, the fastener elements of the respective
25 strip portions are inter-engaged and the backings of the strip portions are simultaneously joined to respective portions of the sheet or film by application of energy to the respective sheet or film portions, air space provided by the inter-engaged elements serving to prevent unwanted welding of the strip portions to each other.

30 According to further aspects of the invention, methods of applying a reclosable fastener to sheet or film are provided, which include the steps of

providing inter-engageable closure strip portions which are either separate strips or strip portions of a common member and joining the backing of the strip portions to respective portions of the surface of the sheet or film by application of energy such as heat, acoustic or radio-frequency energy, to produce for instance

5 welding or adhesive bonding. At least a first of the closure strip portions provides an array of discrete fastener elements such as hook elements having crooks or hook elements having mushroom form, the fastener elements having stems integrally molded with and extending from a thermoplastic backing substrate. The other of the strip portions provides an array of engageable

10 elements such as hook-engageable loops or fibers, or elements self-engageable with fastener elements of the first strip portion, such that the discrete elements of the strip portions are capable of forming a releasable closure. In one aspect, during joining, the fastener elements of the respective strip portions are inter-engaged and the backings of the strip portions are simultaneously joined to

15 respective portions of the sheet or film by application of energy to the respective sheet or film portions, with insulating air pockets provided in the space created by the inter-engaged elements serving to limit thermal transfer and unwanted adhesion or bonding of the closure portions to each other.

In another aspect, the cooperating parts of the releasable closure are of

20 materials that are incompatible or of significantly different melting temperatures such that, under temperature conditions of joining, the interengaged elements do not tend to adhere to each other. Such provisions can avoid the need for presence of a release sheet during the joining action.

In one example, loops or fibers of the second strip portion are

25 encapsulated by and secured by thermoplastic resin of the backing of the respective closure strip portion, the loops or fibers being comprised of resin, such as polyester, that is incompatible with or has a higher melting temperature than the resin such as polyolefin, of the respective backing substrate, and/or of components of the opposed first strip portion, such that, under conditions of

30 joining, the dissimilarity of the material of the loops or fibers serves to prevent detrimental change to the loops or fibers or detrimental adhesion or bonding of

the loops or fibers to the first closure strip portion, preferably, the mass of the hook elements of the first portion being substantially greater than that of the loop elements, the thermal mass of the hook elements being sufficient to prevent undue distortion of the hooks during the joining action.

5 In some cases, the method of the invention is advantageously performed during vertical form and fill packaging. In other cases the method advantageously is performed during horizontal form and fill packaging. The method is also employed to advantage during pouch making.

10 In such cases it is to be noted that the invention does not require the use of any particular resin for the various components. This permits the use of backing substrates of e.g. polypropylene, polyester and nylon for desired barrier qualities that polyethylene does not provide.

15 Also, in cases desired, a wide range of compatibility layers may be employed. For instance, for joining a polyester backing of a closure strip to a polyester sheet or film, a lower melting point layer on either component that adheres to each can be applied. In another case, or where the sheet is a plain or coated paper either a bonding layer may be introduced to one of the mating surfaces or the substance of the backing substrate itself may be used as the bonding surface, e.g. where the backing is polyethylene.

20 According to still another aspect of the invention, a reclosable flexible package is formed of flexible plastic film of wall thickness less than about 0.005 inch and includes a reclosable, elongated closure in which the reclosable fastener has opposable strips adapted to be facially engaged to close the package. The strips are constructed to be usefully engaged upon application of a uniform facial
25 engagement force of less than about one pound per lineal inch of closure, and to be opened by a transverse peel force of less than about two pounds per lineal inch of closure.

30 In some embodiments each of the strips have a bi-dimensional field of at least one type of discrete fastener elements, the fastener elements of each strip being constructed to individually interact with elements of the other opposable strip to form a field of localized releasable fastenings to form a peel-open closure.

In some instances each strip has at least two types of discrete fastener elements, with hooks of each strip engage with loops of the other.

In some cases the strips each comprise loops and loop-engageable fastener elements.

5 Preferably, the closure is less than about one inch in width and has multiple interlaced rows of loop-engageable fastener elements and rows of loops. For instance, in some cases there are at least 10 rows of loop-engageable elements and 10 rows of loops across the width of the closure strip. Preferably, the fastener element density is greater than about 1000 fastener elements per
10 square inch of closure.

In some cases the loops are formed of the filaments of multi-filament yarn.

In some embodiments the closure contains a molded strip having parallel rows of fastener elements molded integrally with a face of the strip, and,
15 interspersed between groups of from one to three adjacent rows of fastener elements, at least one continuous, multi-filament yarn bonded the face of the strip, with filaments of the yarn extending from the face of the strip for engagement by the fastener elements. The multi-filament yarns may be permanently crimped or staked to the face of the strip at spaced apart points along
20 the strip, for example.

In some instances the yarns are comprised of polyester.

In some cases the fastener elements are formed of polypropylene. Another aspect of the invention features a bag closure having matable touch fastener elements arranged in parallel strips extending from one surface of a bag.
25 Between the strips of fastener elements is a frangible region adapted to be torn apart to initially open the bag. After initial opening, the bag is reclosed by folding the closure about the torn frangible region to engage the strips of matable fastener elements.

In some embodiments, one of the strips of fastener elements is a band of
30 hook-engageable loops or fibers; the other strip being of extending male fastener elements, such as hooks or mushrooms.

In some other embodiments, the strips are of self-engageable male fastener elements, having arrays of spaced-apart elements that are designed to interlock, for example, when pressed together.

Preferably, the closure is a continuous, thin, strip-form extrusion of plastic material upon one face of which the fastener elements are either integrally molded of material of the extrusion or bonded to the extrusion while the extrusion is in a softened state, such that the fastener elements are joined directly to the extruded material, or are formed out of the extruded material, without separate adhesives or bonding agents.

10 The frangible zone may be, for instance, a channel formed in one face of the extruded material between the strips of fastener elements. The channel may be either on the outer or inner face of the closure, as incorporated into a bag.

 Joined with bag material to form a bag, the closure is preferably arranged such that the frangible zone extends parallel to and adjacent one edge of the bag. By adjacent, we mean that the frangible zone is preferably between one-half and two inches from the bag edge, such that sufficient space is provided between the frangible zone and the bag edge to grasp the edge region of the bag with one hand while, with the other hand, the main body of the bag is pinched, on the other side of the frangible zone, and pulled away from the frangible zone to tear the closure along the frangible zone.

20 In one preferred bag construction, the bag material forming the back face of the bag is permanently bonded to the back surface of the closure along one closure edge, and the bag material forming the front face of the bag is permanently bonded to the front face of the closure along its opposite edge, in an edge bonding zone free of fastener elements.

 As an alternative to pinching the main body of the bag to separate the closure along its frangible zone, a pull flap may be provided at the connection of the closure to the bag material forming the front face of the bag. The pull flap may either be in the form of a loose edge of the bag material not joined to the closure but exposed along the closure to be grasped and pulled, or a discrete,

local flap of bag material formed, for instance, by die-cutting the bag material prior to attaching the closure.

In one presently preferred embodiment, the closure is formed of polyethylene and has a nominal thickness of about 0.004 inch (0.1 millimeter).

5 The frangible zone is a groove in which the thickness of the closure is reduced to about 0.002 inch (0.05 millimeter) over a groove width of about 0.036 inch (0.9 millimeter). Such a construction can provide acceptable tear properties when incorporated into a bag otherwise formed of 0.002 to 0.005 inch thick (0.05 to 0.125 millimeter thick) polyethylene, for example.

10 In other embodiments of the invention, the frangible zone includes a pull rib which is designed to be pulled along the closure from one edge of the bag to the opposite bag edge, thereby tearing the closure between the strips of fastener elements. In such embodiments, the pull rib may be exposed for grasping by forming a hole or notch through the bag material of the back face of the bag
15 extending partially across the width of the side seal of the bag, immediately behind the pull rib. With the back face of the bag relieved or otherwise spaced apart from the end of the pull rib, the end of the pull rib can be readily grasped and pulled along the width of the bag to initially open the closure.

This aspect of the invention can provide a bag closure that is readily
20 opened without the level of fine motor control required to manipulate very small features. This can be particularly important who, due to arthritis, weak eyesight or other disabilities have a lower level of dexterity.

As a repeated use closure, the product of the invention provides a ventilated, easily alignable seal. As the bands of loops and fastener elements are
25 relatively wide, there is no need for accurate alignment to form a reliable closure. The closure is able to accommodate a fair amount of dirt or debris without losing its function as a closure, making it particularly applicable as a closure for bags containing granular or powder substances. In addition, the natural porosity of the closure can provide some degree of filtering of airborne dust. Such a ventilated
30 closure can be particularly desirable in cargo containers of airplanes in order to accommodate pressure changes, and, by its venting action, may help to avoid

moisture buildup to keep produce and other such items fresh. The groove and rib tear strip molded into the center of the closure strip in some cases advantageously maintains an airtight seal until the bag is initially opened. The continuous closure strip provided by the invention is readily adaptable to standard bag-making
5 equipment and, in many instances, is directly weldable to compatible bag materials. These advantages accrue to bags produced according to the invention and having such a repeated use closure.

If made of an appropriate width, the closure strip of the invention can be folded and sealed to itself to form an enclosed bag.

10 By employing a very light, non-woven loop material and integrally molded fastener elements in several instances, the resulting product is relatively inexpensive and flexible.

The product of the invention is also useful in other applications, either as a packaging closure or as a general purpose fastener. Encapsulating fibers of the
15 loop material in a predetermined pattern of alternating regions of light and heavy encapsulation can produce regions of particularly high loft in which hook-engageable fibers are particularly well-presented for engagement.

As a method of producing fastener products, the invention also provides a reliable method of securing very lightweight loop materials to the front face of a
20 resin substrate having fastener elements, in many cases without adhesives and while the substrate and fastener elements are themselves being formed, eliminating a post-forming attachment step. The method does not require the loop material to have a variable fiber density to provide for variable resin penetration, and can therefore accommodate and locally bond loop materials
25 having a homogeneous fiber density. As fibers of the loop material are, in many instances, directly encapsulated within resin of the substrate, undesirable delamination of loop material from the substrate is avoided during high peel loads. And, as the fastener elements are, in many cases, integrally molded with the substrate, delamination between the fastener elements and the substrate is also
30 avoided. The fastener elements and resin substrate (including any tear strip features such as ribs and grooves appropriate for closure strips) can be molded in

a single continuous process from the same flow of resin, with the loop material fed right through the substrate-forming gap or nip on the side of the resin adjacent the fastener element-forming mold roll.

By appropriately controlling the forming speed and resin temperature and pressure (the optimal values of which are interdependent and will depend on the type of resin employed and the geometry of the product, as will be understood by those of normal skill in the art), the resulting penetration of substrate resin into the loop material may be controlled so as to not completely flood the exposed surface of loops with resin. In many applications, the use of appropriately contoured staking rings in the region of the mold roll adjacent the loop material can help to form a pattern of lofted regions of loop material, which are less penetrated by resin than other areas. Such lofted regions can extend loops for ready engagement by fastener elements.

The apparatus of the invention can provide an efficient means of carrying out the steps of the inventive method described above, to produce a continuous strip of fastener product.

Other features and advantages will be apparent from the following detailed description and attached drawings, and from the disclosures of our earlier U.S. patent applications incorporated by reference above.

Other features and advantages of the invention will be apparent from the following description of embodiments, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a composite touch fastener in the form of a closure strip.

Figs. 1A and 1H are enlarged views of areas 1A and 1H, respectively, in Fig. 1.

Figs. 1B through 1G illustrate the structure of area 1A in various other closure strip embodiments.

Fig. 2A illustrates the application of fill-shifting loads in a bag having the closure strip of Figs. 1 and 1B.

Fig. 2B illustrates the application of peel force to the closure strip of Figs. 1 and 1B.

5 Fig. 2C illustrates another closure strip configuration providing an inner/outer peel preference.

Fig. 3 is a cross-sectional view of the closure strip, folded and installed at the opening of a bag in a sealed condition.

10 Figs. 4A and 4B illustrate a bag with the closure strip of Fig. 1, in sealed and opened conditions, respectively.

Fig. 5 is an enlarged cross-sectional view of the outer edge of the closure strip being grasped to open the bag.

Fig. 6 is a perspective view of a closure strip having a paper backing.

15 Fig. 7 illustrates a first method and apparatus for forming composite touch fastener tapes, such as the closure strips of Figs. 1 and 6.

Fig. 8 is an enlarged, unscaled view of the forming nip of the apparatus of Fig. 7.

Fig. 9 is a highly enlarged view of the loop material securing region of the nip of Fig. 8.

20 Fig. 9A illustrates an alternative arrangement of the loop material staking region.

Fig. 10 is an enlarged view of a portion of the outer edge of a staking ring.

Fig. 11 illustrates a second method and apparatus for forming composite touch fastener tapes, such as the closure strips of Figs. 1 and 6.

25 Fig. 12 shows a nip formed between a mold roll and a contoured pressure roll.

Fig. 13 is a transverse cross-section of a composite fastener tape formed in the nip of Fig. 13.

Fig. 14 illustrates a first vertical form/fill bag-making apparatus.

30 Fig. 15 illustrates a second vertical form/fill bagging apparatus, configured to accommodate the closure strip of the invention.

Fig. 15A is an enlarged view of the means for joining the closure strip to the bag web in Fig. 15, with portions removed to show the configuration of the insulator rail and sealing jaws.

Fig. 16 is a cross-sectional view, taken along line 16-16 in Fig. 15.

5 Fig. 16A is a cross-sectional view, corresponding to Fig. 16, with an inverted closure strip arrangement.

Fig. 17 shows a first inverted horizontal form/fill packaging apparatus and method, with the closure strip fed into the fin seal between the web flanges.

Fig. 17A is a cross-sectional view, taken along line 17A-17A of Fig. 17.

10 Fig. 18 shows a second inverted horizontal form/fill packaging configuration, with the closure strip wrapped about the web flanges.

Fig. 18A is a cross-sectional view, taken along line 18A-18A of Fig. 18.

Fig. 19 shows a third horizontal form/fill packaging method, with the fin seal formed on the underside of the packages.

15 Fig. 20 shows an apparatus and method for forming bags to be filled from an open end opposite their closures.

Fig. 21 is a cross-sectional view, taken along line 21-21 in Fig. 20.

Fig. 22 is an enlarged view of area 22 in Fig. 20, showing the configuration of the closure as applied to the web.

20 Fig. 23 shows one configuration of an edge seal formed between two adjacent bags in the process of Fig. 20, for forming exposed closure pull tabs.

Fig. 24 illustrates opening a bag with an exposed closure pull tab, such as formed from the edge seal configuration of Fig. 23.

25 Fig. 25 shows another method for forming pouches, in which the closure strip is bonded to the edges of a sheet of bag film as the film is folded.

Fig. 26 illustrates making recloseable bags from two parallel plastic webs and a closure strip.

Fig. 26A shows a bag made by the process of Fig. 26.

30 Fig. 27 shows a package having a broad closure strip displaying consumer information.

Fig. 28 is a transverse cross-section through the closure strip included in the package of Fig. 27.

Figs. 29 and 30 are enlarged views of areas 29 and 30, respectively, in Fig. 28.

5 Fig. 31 is a cross-section through a bag having a closure strip with exposed loop-engageable elements extending from an outer bag surface.

Fig. 32 illustrates a method and apparatus for forming the closure strip of Fig. 31.

10 Fig. 33 is a partial outer view of an upper corner of a pouch having a recloseable top.

Fig. 34A is a side cross-sectional view of the pouch of Fig. 33, taken along line 34A, showing the structure and attachment of the closure strip.

Figs. 34B and 34C sequentially illustrate the opening and reclosing of the pouch of Fig. 34A.

15 Fig. 35A is a cross-sectional view through the closure end of a roll-top bag.

Figs. 35B through 35D sequentially illustrate the opening and reclosing of the bag of Fig. 35A.

20 Fig. 36 is a cross-sectional view through the closure end of a bag with an inverted closure.

Fig. 37 illustrates a method and device for attaching the closure strip to the bag of Fig. 36.

Figs. 38A-38C show rolled bag films with pre-applied closures, in various configurations.

25 Fig. 39 is a perspective view of a reclosable bag.

Fig. 40 illustrates the bag of Fig. 39 being opened by pinching and pulling.

Fig. 41A is a cross-sectional view of the closure end of the bag, taken along line 41A-41A in Fig. 39.

Fig. 41B shows the bag cross-section of Fig. 41A with the bag initially opened and then folded about the opening to engage the fastener elements of the closure.

Fig. 42 illustrates the closure, in transverse cross-sectional view, before
5 being attached to bag material.

Fig. 43 is an enlarged view of area 43 in Fig. 42.

Fig. 44 is a cross-sectional view, taken along line 44-44 in Fig. 43.

Fig. 45 is a cross-sectional view similar to Fig. 41A but of a bag having an edge pull tab along the lower closure edge.

10 Fig. 46 is a perspective view of another bag, having a front face pull tab.

Fig. 47 shows a bag having a closure tear rib with a graspable end.

Fig. 48 illustrates a third vertical form/fill bagging apparatus and method, in which the closure strip is applied to the bag film before the film is wrapped about the forming head.

15 Fig. 49A is a cross-sectional view, taken along line 49A-49A in Fig. 48.

Fig. 49B is taken from the same perspective as Fig. 49A, with a different closure strip configuration.

Figs. 50A and 50B show closure strips with peelable seals.

Fig. 51 shows a hook-to-hook engagement between facing bands of
20 oppositely-directed, hook-shaped fastener elements.

Fig. 52 is a cross-sectional view, taken along line 52-52 in Fig. 51.

DESCRIPTION OF EMBODIMENTS

Referring to Fig. 1, a lengthwise-continuous closure strip 100, such as for
25 sealing a bag, consists of a thin, sheet-form resin substrate 102 with lengthwise-continuous, parallel bands 104 and 106 of loops and fastener elements, respectively, on its front face 108. Bands 104 and 106 are equally spaced from the center "C" of the closure strip, such that when the strip is folded longitudinally at "C" to cover front face 108, the fastener elements of band 106

engage and retain the loops of band 104 to form a releasable fastening. The fastener elements 110 of band 106 are integrally molded with and extend from front face 108. In this embodiment, these fastener elements are in the form of J-hooks that extend, in rows, along the length of the closure strip. Some of the J-hooks face in opposite directions along the strip. Other fastener element shapes may also be employed, including those that overhang the substrate 102 in a widthwise direction. A suitable fastener element shape is the CFM29 hook shape (of about 0.015 inch in height), available in various products sold by Velcro USA in Manchester, New Hampshire.

Band 104 of loops consists of a preformed, non-woven web of polymer fibers, which may include a stabilizing binder, and which are bonded to front face 108 of substrate 102 at various points across the width and length of the web. Suitable loop materials include those disclosed in U.S. Patent application 08/922,292, and in the related PCT patent application PCT/US98/18401, filed as a continuation in part of the foregoing application, the entire disclosures of which are hereby incorporated by reference as if fully set forth.

Preferably, the non-woven loop material in band 104 is very thin, such as less than about 0.040 inch thick (more preferably, less than about 0.020 inch thick), with web fibers held in a transversely stretched condition and freestanding loop structures extending from its exposed surface. As discussed in the above-referenced patent applications, the loop structures extend from associated knots in the stretched web, which may be stabilized by liquid binder wicked into the knots and cured. Between knots, the thin fiber mat is not very dense and is sheer enough to permit images to be readily seen through it. Overall, the loop material has a basis weight (in its preformed state, including any pre-applied binder) of less than about 4 ounces per square yard (136 grams per square meter), preferably less than about 2 ounces per square yard (68 grams per square meter). Other details of this loop material may be found in the above-referenced applications. For applications in which the loop material is partially penetrated by resin of the substrate as the substrate is formed (as discussed below), the needled loop

material is preferably only stretched in a transverse direction only about 22 percent to leave a fair amount of loft and avoid total penetration.

In some instances, loop material 104 is partially encapsulated directly in resin of the substrate as the substrate is formed in a continuous molding process (described below). In other cases, it is bonded to the formed substrate, either by
5 ultrasonic bonding, welding, or adhesives.

Some lightweight knits are also suitable loop materials for certain applications. Examples of such knits are Product 19902 from Guilford Knits in Greenville, South Carolina, which is of polyester fibers and has a basis weight of
10 only about 1.6 ounces per square yard. For a heavier knit, we prefer Guilford's Product 19029, a nylon knit of about 3.3 ounces per square yard. Lightweight knit products are also available from TYBOR in Spain, and MIZARD in Italy.

Figs. 1A through 1D illustrate various patterns of variable bonding between loop material 104 and substrate 102. Such variable bonding patterns
15 correspond, in some cases, to variable resin penetration into the web of the loop material, which may be achieved by employing different arrangements of staking rings and/or barrier materials between the loop material and substrate, both of which are discussed further below. In Fig. 1a, loop material 104 is only fully penetrated by substrate resin in narrow edge regions 114, and is less penetrated at
20 its center. For instance, if loop material is about 3/4 inch wide (W_L), then fully penetrated edge regions 114 may have a width of only about 1/8 inch (w_e). The center region of the loop material is less penetrated and gently arches away from the substrate, presenting the loops for engagement. The inclined sides of the center arch can also help to enhance the peel strength of the fastening at the edges
25 of the loop material, as they resolve a small component of the peel force in a tangential, or shear, direction.

In Fig. 1B, the loop material is fully bonded to the substrate in narrow bands 116 spaced inward from its edges, leaving edge regions 118 relatively lightly bonded, or even loose. One advantage of this bonding pattern is that the
30 inner edge region 118 on the inside of the associated bag helps to deflect separation loads caused by shifting bag contents, which would otherwise generate

high peel forces between the fastener elements and the loops, into separation forces between the loop material and substrate (as illustrated in Fig. 2A). The high bonding strength of inner band 118 helps to avoid delamination of the loop material from the substrate. Another advantage of this bonding pattern is that it enhances initial peel strength of the fastening, as the outer edge region 118 of the loop material follows the fastener elements during peel until it is separated in shear (Fig. 2B).

Having only one inner edge region 118 unbonded can in some instances provide better inner opening resistance (e.g., from content shifting) than having both inner edge regions free. We presently prefer to leave only the edge of the loop side of the closure strip unattached to the bag web in most cases, as shown in Fig. 31 (discussed below), with the hook side edge bonded to the inner surface of the bag web.

Another closure arrangement for providing good resistance to being opened from inside the bag but readily opened from outside the bag is shown in Fig. 2C. All of the hook elements 250 are arranged with their loop-engaging tips facing the inside of the bag, providing a difference in inside and outside peel resistances. With the hooks fully engaging the loops of loop material 252, peel forces applied to the closure by movement of bag contents in the direction of arrow "A" are resisted to a greater degree than user-applied peel forces in the direction of arrow "B".

The pattern of variable bonding shown in Fig. 1C creates transverse pillows 120 of relatively lightly bonded, or loose, loop material separated by transverse bands 122 of relatively more fully bonded (e.g., more deeply encapsulated) loop material. The loftiness of pillows 120 is exaggerated for illustration. This pattern provides some of the peel-enhancing and load-shifting advantages of the pattern of Fig. 1B, due to the "free" pillow ends along the inner and outer edges of the loop material.

Fig. 1D illustrates a bonding pattern with longitudinal pillows 124 of relatively lightly bonded, or loose, loop material, separated by longitudinal bands 126 of relatively more fully bonded (e.g., more deeply encapsulated) loop

material. Again, the loftiness of the pillows is exaggerated for illustration. Fig. 1E is a variation of the pattern of Fig. 1D, with each longitudinal band of more fully bonded material separated into longitudinally alternating regions of light and heavy bonding. The regions of light and heavy bonding are staggered across the loop material, producing a checkerboard pattern of lofted loop pillows. In the pattern illustrated in Fig. 1F, the center region of loop material 104 is heavily bonded to the substrate about the peripheries of spaced apart, circular lofted regions 125 which are less firmly bonded. The exposed surfaces of the lofted loop pillows 125 extend outward to present loops for engagement. Other shapes of lofted regions 125, such as ovals, may also be employed. One of the edge regions of the loop material of Fig. 1F is similar to the edge regions shown in Fig. 1B, while the other forms transverse pillows similar to those of Fig. 1C. Fig. 1G shows a bonding pattern with edge regions 128 of alternating light and heavy bonding, and a center region bonded in only isolated regions 130. The bonding patterns described above may be mixed and varied for different applications, as required.

As an alternative to feeding a preformed sheet of loop material into a forming nip to create the loop band 104 of the closure strip, engageable loops may be formed subsequent to forming the base of the closure strip by stitching loops directly into the base (as in a MALAMO process), or by bonding a strip of loop material to the face of the closure strip.

Referring back to Fig. 1, molded into the front face 108 of substrate 102 along its center is a hump-shaped longitudinal rib 132 between a pair of grooves 134 molded into front face 108. As shown in Fig. 1H, one example of this rib 132 has a height of about 1/32 inch and a width of about 1/32 inch at its base. The rib may have a hump-shaped profile, as shown, or a rectangular cross-section with parallel sides. The rib is preferably longitudinally continuous, as shown, but may alternatively be formed as a row of appropriately shaped protrusions. At least one of the flat regions 135 between grooves 134 and the loop and hook bands 104 and 106 in Fig. 1 contains, in some cases, a layer of adhesive such as a pressure sensitive adhesive (not shown), for providing a reclosable seal for

applications where a rescalable opening is desired. In these instances surfaces 135 provide an airtight, non-ventilated seal when the bag is closed, and supplement the mechanical closure strength of the hook and loop fasteners. Preferably, an adhesive is employed which has been compounded so that it sticks primarily only to itself or to the opposing face of the substrate, so as to not pick up excessive debris from the bag contents. In other, non-illustrated embodiments, either grooves 134 or rib 132, or both, are formed on the back face of the substrate, opposite the fastener elements and loop material.

The formed closure strip 100 is permanently installed at the openable end of a bag by attaching edge regions 136 of the closure strip to outer edges of the bag at its opening, with the loop and hook bands facing each other, as shown in Fig. 3. The bag may be attached to the back face of the closure strip as shown, in which case edge regions 136 are defined on the back face of the closure strip, or on the front face, with the edges of the bag on the inside. Methods of attaching the closure strip to the bag include, but are not limited to, welding, gluing, adhering or stitching. One preferable method of attaching a closure strip to a bag of a compatible resin is by directly welding the resin of the closure substrate to the resin of the bag, as discussed below. In this manner, polyethylene closure strips may be readily welded to polyethylene bags.

Fig. 4A illustrates a sealed bag 138 having a polyethylene body 140 welded to closure strip 100 across its openable end. Preferably, the thickness of the substrate of the closure strip is about the same as the thickness of the material of the bag body, in the range of 0.002 to 0.005 inch. Substrates of up to at least 0.015 inch in thickness, however, may be produced by the methods described below. To initially break the seal and open the bag, the outer fold of closure strip 100 is grasped and pulled, thereby tearing the folded edge from the bag from one end of the bag to the other, as shown in Fig. 4B. In grasping the outer fold of the closure strip, the middle rib 132 is grasped between the thumb and forefinger. Rib 132 thus provides an edge of increased thickness for easy grasping. As the folded edge of the closure strip is torn away, the closure strip tears along grooves 134. Grooves 134 function as frangible tear points for initially opening the

associated bag, and may be straddled by an associated local thickening of the substrate, such as in the form of ribs or rows of raised bumps (not shown) to direct the propagation of the tear along the grooves.

Preferably, the resin of the substrate of the closure strip is compatible with
5 the resin of the bag body, to enable direct welding of the two together. In situations where this is not practical, a separate layer of a bag-compatible material may be provided on the closure strip. For example, a layer of paper 142 may be bonded to either the front face of the closure strip (e.g., in edge regions 136 in Fig. 1), or across the back face of the closure strip as shown in Fig. 6, or
10 along just the edges of the back face of the closure strip (not shown). The paper 142 may be directly bonded to the resin of the substrate (e.g., during the forming of the substrate, as described below), or joined with adhesive after the substrate is formed.

Fig. 7 illustrates one method and apparatus for producing the above-
15 described closure strips. The method builds upon the continuous extrusion/roll-forming method for molding fastener elements on an integral, sheet-form base described by Fischer in U.S. Patent 4,794,028, and the nip lamination process described by Kennedy, et al. in U.S. Patent 5,260,015, the details of both of which are incorporated herein by reference. The relative position and size of the
20 rolls and other components is not to scale. An extrusion head 150 supplies a continuous sheet of molten resin to a nip 152 between a rotating mold roll 154 and a counter-rotating pressure roll 156. Mold roll 154 contains an array of miniature, fastener element-shaped mold cavities extending inward from its periphery (not shown) for molding the fastener elements. Pressure in nip 152
25 forces resin into the fastener element cavities and forms the substrate. The formed product is cooled on the mold roll until the solidified fastener elements (e.g., hooks) are stripped from their fixed cavities by a stripper roll 158. Along with the molten resin, a continuous strip of loop material 160 (which becomes loop band 104 in Fig. 1) is fed into nip 152, where it is partially impregnated by
30 resin and becomes permanently bonded to the front face of the substrate. Thus

the product 162 that is stripped from the mold roll includes both fastener elements and loops.

For higher production rates, two or more widths of closure strip may be simultaneously produced on a single mold roll, and later split and spooled.

- 5 Referring also to Fig. 8, two strips 160 of loop product are fed in parallel into positions 164 along nip 152. Molten resin is introduced across the entire nip, forming two bands of hooks in regions 166. Mold roll plates of appropriate widths and edge configurations are arranged to produce the ribs and grooves at the center of each closure strip. A splitting channel ring 168 at the center of the
- 10 mold roll produces a splitting channel in the product, along which the resulting tape is split by a blade 170 (Fig. 7; either stationary or rotating) into two separate runs of closure strip which are separately spooled. In some configurations, a wide section of the mold roll surface is defined by a single, solid roll sleeve having a profiled outer surface for forming one or more of the series of features
- 15 extending along the closure strip. For instance, in one arrangement, the entire width W_A of the mold roll surface between the hook bands is defined by a single sleeve having a ground circumferential profile defining all features between the hook bands. When thin staking rings (discussed below) are employed in the loop material regions 366, widths W_B and W_C of the mold roll surface are preferably
- 20 formed by solid, wide mold roll sections. Employing such wide plates provides additional resistance to mold roll bending loads caused by molding nip pressures, enabling wider product widths to be formed without excessive product thickness variations.

Fig. 7 also indicates several variations of the above-described method.

- 25 For instance, rather than introduce the loop material 160 through nip 152 and thereby join it to the substrate as the substrate is molded, the loop material may be joined to the substrate after the substrate has been formed, such as is indicated by the run 160' of loop material shown in dashed outline. In this case, front face idler 172 is heated and has a contoured surface for producing the desired pattern
- 30 of bonding between the loop material and the substrate. Paper may be joined to the back face of the substrate, to produce the product shown in Fig. 6, by either

running a strip 174 of paper through nip 152 on the pressure roll side of the resin, or by adhering adhesive-coated paper 174' to the formed substrate either at stripping roll 158 or at idler 176. In some cases, adhesive-coated paper 174' includes a transfer coating, such that its paper backing may be peeled from the adhesive on the back of the product to secure the back of the final product to a supporting surface. The adhesive applied to the back of the product in this manner may be either a pressure-sensitive or heat-activated adhesive, for instance. For decreasing the permeability of the final product, a second flow of resin (either molten or in the form of a film) may be added to the nip against pressure roll 156, as strip 174 is shown, to form a backing on the final product. For instance, a layer of polyester may be added to reduce the permeability of a polyethylene closure strip, such as for packaging certain foods. Adding a strip of barrier material 178 between the loop material and the molten resin optionally controls the pattern of penetration of resin into the loop material in nip 152. Barrier material 178 is, in some instances, a perforated paper or film that allows resin to pass into the loop material in selected regions but inhibits its flow into other regions, such as for producing the bonding pattern of the center region of loop material shown in Fig. 1G. The barrier material may also be a homogeneous sheet of material having a high porosity, equally limiting the penetration of resin into the loop material across the width of the barrier material. Rather than be introduced as a separate sheet, in some cases the barrier material is pre-applied to the surface of loop material 160 and may be in the form of a binder located in discrete areas of the loop material and locally encapsulating fibers of the loop material, for instance. In many cases, the barrier material is narrower than the loop material, and centered along the width of the loop material, to enable full penetration of resin into the edges of the loop material. In some cases, however, as to produce the bonding pattern of Fig. 1B, for instance, thin strips of barrier material are run into the nip along the edges of the loop material to inhibit the bonding of edge regions 118 (Fig. 1B) to the substrate. Other arrangements of barrier and loop materials, and resulting bonding patterns, will be apparent upon reading this disclosure. In all cases in which the barrier material becomes

permanently bonded to the substrate and therefore becomes an integral part of the final product, it should be selected for its low material cost and weight.

Fig. 9 illustrates the bonding of the loop material 160 to the resin of the substrate in area 164 of nip 152 (Fig. 8). "Staking" rings 180 on either side of a reduced diameter plate 182 engage the edges of the loop material to locally hold the edges of the loop material against the resin of the substrate as the resin forms the substrate under nip pressure, thereby ensuring heavy penetration of the loop material in predetermined areas along its edges. This configuration shown in Fig. 9 produces the bonding pattern illustrated in Fig. 1A, the staking rings 180 forming heavily bonded edge regions 114, the width w_e corresponding to the width of the staking ring. The staking rings may extend slightly beyond the nominal mold roll diameter, as shown in Fig. 9, or be flush with adjoining mold roll rings (as shown in Fig. 9A, for example).

To form a row of heavily bonded points separated by regions of lower resin penetration, some staking rings 180 have a contoured outer edge as shown in Fig. 10. A series of protrusions 184 extending beyond the nominal diameter D_s of the staking ring cause the resin to locally penetrate farther into the loop material. In this example configuration, D_s is 9.968 inches, the height (h_s) of each protrusion 184 is 0.014 inch, and the inner and outer radii (R) at the flank of each protrusion is 0.015 inch. The protrusion pitch (P_s) is 0.190 inch, and the length of the flat between protrusions (w_f) is 0.130 inch. The dimensions of the protrusions are selected to attempt to optimize the maximum approach angle α_f of the protrusion flank with respect to a local ring tangent. A steep approach angle (i.e., an abrupt change in ring diameter) can cause a sharp local increase in nip pressure and an undesirable local flooding of the front side of the loop material with resin. Such flooded areas can create local "depth stops" to mating fastener elements, reducing the fastener element penetration into the loop material. A zero approach angle (i.e., no protrusions) would result in a homogeneous resin penetration beneath the staking ring, which may not be as desirable as local loop material "pillowing" (discussed above) in some applications. The maximum approach angle α_f in the illustrated staking ring embodiment is about 40 degrees.

A shallower angle (e.g., of about 30 degrees) may be preferable in some cases, as may a longer spacing w_f between protrusions to provide longer, lofted pillow regions.

Fig. 9A shows a staking ring configuration for producing the bonding pattern shown in Fig. 1E. Staking rings 186 having the profile shown in Fig. 10 are stacked together with staggered protrusions, such that the pattern of heavily bonded regions resembles a checkerboard with elongated "pillows" extending outward between the heavily bonded regions. The width w_s of each ring is about 0.018 inch.

10 This in situ staking method for attaching loop material to the resin of a fastener substrate as the substrate is being formed has broad applicability to the production of composite touch fasteners. For example, Fig. 12 shows a nip 152' between a mold roll 154' and a pressure roll 156'. Mold roll 154' contains many thin fastener element molding rings 214, which may be alternated with spacer rings (not shown), to integrally mold fastener elements extending from one side of a sheet-form base as taught by Fischer. In this case, however, pressure roll 156' has a pattern of protrusions 216 extending from its otherwise smooth surface. The protrusions locally narrow gap 152' in discrete regions, causing a variation in nip pressure during formation of the fastener tape. Running a fibrous preformed material through the nip against the pressure roll with the molten resin, as taught by Kennedy, et al., will, in this configuration, cause fibers of the preformed material to be encapsulated more fully in the resin in areas corresponding to protrusions 216. This in situ "staking" method is particularly useful when the fibrous preformed material is a very porous, thin material such as a needled non-woven web with a low basis weight. The pattern of protrusions on the pressure roll is selected to form an inverse pattern of lofted "pillows" of loop material at most only partially encapsulated in the substrate resin.

Fig. 13 is a transverse cross-section of a composite fastener tape 218 produced in this fashion, having an array of hook-shaped fastener elements 220 extending from one side of the substrate 222, and a lightweight, non-woven web of loop material 224 permanently bonded to an opposite side of the substrate.

Loop material 224 is coextensive with the substrate in this case (i.e., it extends across the full width of the substrate), but is fully encapsulated in substrate resin only in discrete regions 226. Between regions 226, the loop material forms the above-described "pillows" 228, or lofted regions, which are not fully encapsulated in resin. The loft of pillows 228 enables the heads of fastener elements 220 to penetrate the loop material and engage individual fibers during fastening. A similarly contoured pressure roll 156' (Fig. 12) may also be employed to attach a strip of loop material to the fastener element side of a fastener tape.

- 10 Fig. 11 illustrates an alternative method and apparatus for forming the above-described closure strips. The contoured surface of an extrusion head 188 (sometimes called an injection head) is placed adjacent a mold roll 154 (with fixed fastener element molding cavities as described above with respect to Fig. 7), and a continuous flow of molten resin is injected under pressure into the gap 15 defined between head 188 and mold roll 154, filling the fastener element cavities and forming the front and back faces of the substrate. The configuration and construction of mold roll 154 is the same as is shown in Fig. 8, in which member 156 may be taken to be the adjoining extrusion head. The strip 160 of loop material is fed through a predetermined region of gap 190, and held up 20 against the surface of mold roll 154 by resin pressure in the gap. In this manner, the loop material is partially impregnated with substrate resin and permanently bonded to the front face of the substrate. In applications where it is not possible to fill the fastener element cavities without completely saturating the loop surface of the loop material with resin, a strip of barrier material 178 may be fed through 25 gap 190 between head 188 and loop material 160. Barrier material 178 is discussed in more detail above with respect to Fig. 7. For some applications a strip 174 of paper or other suitable backing material is laminated to the back face of the substrate while the molded product is retained on mold roll 154, by pressure supplied by a pressure roll 192, as shown in dashed outline.
- 30 Alternatively, a strip of adhesive-coated paper 174' may be adhered to the formed substrate either at stripping roll 158 or at idler 176.

Fig. 14 illustrates an inverted vertical form/fill (VFF) method and apparatus for forming and filling bags (such as bag 138 of Fig. 4A). Closure strip 100 and a sheet of bag material 194 are each folded and fed about a longitudinal mandrel 196, with their edges overlapping at two points. In the embodiment shown, both the bag material 194 and the substrate of closure strip 100 are polyethylene. Two heated rollers 198 (only one visible from the perspective illustrated) weld the edges of the closure strip and bag material together to form a continuous tube 200 with two longitudinal sealed seams. In the apparatus shown, tube 200 extends upward through a lower sealing/cutting device 202 and an upper sealing device 204. In the bag forming and filling sequence, tube 200 is advanced upward until its open end is aligned with upper sealing device 204. Lower sealing/cutting device 202 then forms a transverse seal across the tube to form one sealed side of the resulting bag. The bag is then filled from above, through the still open end of the tube, with material supplied through chute 206. After a predetermined amount of material has been released into the bag, the open end of the tube is sealed by upper sealing device 204 to form a sealed bag 138, which is then severed from tube 200 by cutting the tube just below the previously formed transverse seal by lower sealing/cutting device 202. The resulting bag 138 has one edge 208 of folded bag material 194, two sealed edges 210, and one edge 212 of folded closure strip 100. Other methods of sealing closure strips to bag materials are known to those of normal skill in the art of bag making. For instance, for sealing the paper-covered surface of closure strip 100' (Fig. 6) to a paper bag material 194, a layer of adhesive would normally be applied between the overlapping paper edges of the closure strip and bag material.

Fig. 15 illustrates a modification to a more common VFF machine configuration, for continuously securing the above-described closure strip to a flow of bag-forming web during the forming and filling of individual bags. The bag-forming web consists of a thin sheet of thermoplastic film 254 which is shaped into a tube by being fed over a filling tube 256, which has an upper funnel end 258 through which contents are discharged to fall into individual bags formed of the film. Film 254 is fed from a roll (not shown) over an attitude roller

260, and guided onto the fill tube by curved guide forms 262. In some cases, the film is advanced continuously and the transverse sealing jaws 264 (described below) reciprocate vertically, traveling with the film during the sealing/cutting process (as indicated by arrows 265); in other cases the film is advanced
5 incrementally and the transverse jaws remain within the same horizontal plane.

As film 254 is formed into a tube, its two longitudinal edges 268 form flanges extending generally radially from the tube, between which a continuous length of closure strip 266 is fed in a folded condition, such that the edge regions of the web film lie at least partially against the outer sides of the closure strip in
10 face-to-face relation, but do not overlap the folded edge of the closure strip. Guide rollers 270 above the closure sealing bars 272 maintain the adjacency of the sides of the closure strip and the film edges. Closure strip 266 is fed over a contoured insulating rail 274 extending longitudinally along the fill tube from above guide rollers 270 to below closure sealing bars 272. As shown in Figs.
15 15A and 16, insulating rail 274 has a longitudinal groove along each of its sides. One groove accommodates the loop material 104 so as to avoid crushing the extended engageable loops, and the other groove receives the hooks 106 of the closure strip, helping to guide the closure strip through the sealing process. Rail 274 also has a notch extending along its distal end, for accommodating the
20 middle grasp rib 132 of the closure strip. The primary purpose of insulating rail 274 is to inhibit undesired welding of the inner sides of the closure strip together as the edges of the bag film are welded to the outer surfaces of the closure strip by closure sealing bars 272 (see Fig. 16). When not employing an insulating rail, the closure strip may be configured to utilize the insulating properties of the loop
25 material to avoid permanent welding together of the inner surfaces of the closure strip, as discussed more fully below.

Closure strip 266 may either be spooled from roll 276 over guide roll 278 in a folded condition, as shown, with its hooks and loops engaged and then pulled over insulating rail 274, thus separating the hook and loop sections of the closure
30 strip, or the closure strip may be spooled flat and then folded about the insulating

rail, thereby avoiding having to disengage the hook and loop sections in the process.

Closure sealing jaws 272 each have a longitudinal groove adjacent the longitudinal grooves of insulating rail 274, such that the heated sealing jaws
5 slidingly contact the film edge regions only on either side of the hook and loop bands of the closure strip, sealing the film to the closure strip in two discrete bands on each side of the closure strip. Sealing jaws 272 have appropriate heating elements embedded within them (not shown) to maintain the sealing surfaces at a predetermined, elevated temperature. To leave the inner edge of the
10 loop side of the closure strip free from the film to form an anti-peel flap (as discussed above with respect to Figs. 2A and 2B), the sealing jaw 272 on the loop side of the closure is at least partially recessed, as shown, to avoid bonding the inner edge of the loop side of the closure strip to the bag film. To form an even wider anti-peel flap, the sealing jaw 272 on the loop side of the closure may be
15 configured to contact the bag film only outboard of the band of loop material 104.

Immediately below the lower edges of sealing jaws 272, insulating rail 274 terminates and the hook and loop bands of the closure strip are pressed together between a pair of rollers 280, just above the lower end of fill tube 256.

After a selected amount of contents have discharged through the lower
20 end of the fill tube, transverse sealing jaws 264 come together about the bag film and closure strip and form two parallel, transverse seals 284, each of which will form the sealed edge of a bag. As jaws 264 travel with the advancing film, a cutting knife 282 within the jaws severs the film and closure strip between the transverse seals 284. When jaws 264 open at the end of the sealing cycle, a fully
25 formed, filled and severed bag 286 is complete.

Fig. 16A shows another configuration of sealing a closure strip 288 to edge regions of a film web 254 as the film web is fed about a fill tube 256, for creating what we call an inverted closure having free outer edges and a recessed center portion. In this configuration the closure strip is guided over a separate
30 insulating rail 290 that extends between the film edges and the opposing sides of the closure strip, similar in cross-section to the insulating rail of Fig. 16 but in

opposite orientation. In this case closure strip 288 is provided with a center tear notch 292, rather than a center rib, along which the closure is burst to initially open the bag. In the bag formed with this style closure, the hook and loop elements are not exposed to the bag contents prior to the initial opening, and the center portion of the closure strip provides a tamper-evident seal. Closure strip 288 is permanently sealed to the bag film by heated sealing jaws 272' which are similar in construction to sealing jaws 272 of Fig. 16.

Figs. 17-19 illustrate three examples of horizontal form/fill (HFF) machines and processes featuring the above-described closure strips. Referring first to Fig. 17, a bag film 254 is continuously fed from roll 294 over attitude roller 296 and into a forming head 298 shaped to form the film into a rectangular tube 300. As with the VFF method described above, the edges of the film are brought together to form a perpendicular fin 302 extending from one side of the tube. In this case, closure strip 100 is fed from roll 304, folded to engage the hook and loop bands, passed about angled roller 306, and fed into the nip between heated fin seal rollers 308 between the edges of the bag film. Meanwhile individual products 310 to be packaged (e.g., trays of cookies) are fed through the forming head and into film tube 300 at a predetermined spacing and rate corresponding to the speed of the bag film.

As shown in Fig. 17A, the outer surfaces of folded closure strip 100 are permanently welded to the extending film flanges forming the perpendicular fin 302 of the film tube in the nip between fin seal rollers 308. No insulating rail is needed between the inner surfaces of the closure strip in this case because the air between the hooks and loops extending from the inner surfaces of the closure strip prevents extensive welding inside the closure strip. With proper adjustment of the temperature and pressure of rollers 308, which depends on the type of resin employed and the line speed, among other things, at most only a small fraction of the heads of hook elements in hook band 106 will be lightly bonded to either loop material 104 or the resin in which the loop material is embedded. This small amount of bonding will advantageously increase the amount of peel force required to initially open the package, leaving a sufficient proportion of

undamaged hook elements to provide adequate engagement upon reclosure. We note that with many hook and loop resins, speeds, temperatures and pressures will have to be carefully adjusted and controlled to provide a light bond while avoiding rapid progression of hook melting.

5 Referring back to Fig. 17, diagonal offset folding rollers (not shown) fold over the fin seal, and a pair of offset rollers 312 carrying a heated seal bar and cutting blade seal the ends of the bags and sever the bags from each other.

Fig. 18 shows a similar HFF process, in which the closure strip 100 is folded over on the outside of both the bag film flanges and a fin seal insulating
10 rail 314 that extends to just downstream of heated fin sealing rollers 308. Passed around angled roller 306, closure strip 100 is folded within a guide channel 316 such that the edges of the closure strip overlap the edges of the bag film, as shown in Fig. 18A. These overlapped regions are welded together on either side of insulating rail 314 by the fin sealing rollers, permanently bonding the closure
15 strip to the bag film. As the fin seal is folded over before passing between offset rollers 312, the hook and loop bands of the closure strip are pressed together, before the inner surfaces of the bag film flanges are welded together at the end seals of the bag. The hook and loop bands may also be welded together at the end seals, if desired, by providing sufficient heat, pressure and dwell time of the
20 portion of the heated sealing bar of the offset rollers that contacts the closure strip at the hook/loop interface.

Fig. 19 illustrates the incorporation of a reclosable closure strip into a more common HFF machine configuration, with the longitudinal fin seal 302 formed on the bottom side of the rectangular film tube 300. As in Fig. 18,
25 closure strip 100 is folded about the outside of the extended film edge flanges, which are separated by an insulating rail (not shown) that extends through the nip between the fin sealing rollers 308.

Fig. 20 shows another application of our closure strip in a bag-making process. Closure strip 318 differs from the closure strip shown in Fig. 1 only in
30 that it contains a pull cord 320 (Fig. 22) embedded along its central rib 132. The pull cord is configured to tear through the closure strip and bag film

longitudinally between the hook and loop bands when pulled transverse to the closure strip, and therefore must be of sufficient tensile strength to tear through the closure strip resin without breaking. Suitable pull cord materials include drawn nylons, such as fishing line, for example. The pull cord is embedded
5 within the resin of the center closure strip rib by being continuously fed into the rib-forming channel 322 of the mold roll (Fig. 8) prior to the introduction of the rib-forming resin (such as long the feed path labeled 178 in Figs. 7 or 11). Appropriate guides (not shown) are recommended to keep the pull cord from walking out of the rib-forming channel.

10 Closure strip 318 is passed around a guide roller 324 to travel with bag film 254 onto a folding collar 326 where it is permanently bonded to the film under heat and pressure by a sealing shoe 328. As shown in Fig. 21, sealing shoe 328 slidably engages the closure strip along three bands, forming three continuous welds 330 between the closure strip and bag film 254. Collar 326
15 supports the bag film against the light pressure applied by the sealing shoe. The channels 332 and 334 in the sealing shoe accommodate the hook band 106 and center rib 132 of the closure strip, accordingly, and maintain the transverse location of the closure strip during bonding. The outer edge of the loop side of the closure strip is not welded to the bag film in this instance, to provide an
20 internal anti-peel flap in the finished bag, as shown in Fig. 22. Other bonding configurations are employed for various applications.

Once welded together, bag film 254 and closure strip 318 are folded along their longitudinal centerline and passed between two drive rollers 336 that press the hook and loop bands of the closure strip together and ensure an appropriate
25 crease along the spine of the closure strip. The folding of the bag film and closure strip is effected by collar 326 and a creasing idler 338 that runs along the center of the closure strip and defines a rim groove 340 for receiving the center rib of the closure strip during folding.

The folded bag film next passes between a pair of reciprocating
30 sealing/cutting jaws 342 which close against the outer surfaces of the bag film to seal the two sides of the folded bag film and the folded closure strip together to

form a series of individual pouches, each pouch sealed on three sides and having a single open end 344 for subsequent filling. Jaws 342 may be configured to also sever the pouches from each other during sealing, or to leave the pouches connected in the form of a string of pouches that is readily pulled through an adjacent filling/closing station (not shown).

Fig. 23 gives one example of a pouch side seal configuration formed by the jaws 342 of Fig. 20, in which a slot 346 and notch 348 are die-cut within the vertical seal formed between adjacent pouches. The heated faces of jaws 342 form complementary die parts for cutting through the bag film and closure strip to form the configuration shown as the inter-pouch seal is formed. The pouches are then filled through their open ends, which are subsequently sealed closed. By severing the lower segments 350 joining adjacent pouches along centerlines 352, extended pull tabs 354 are formed at the edges of each pouch. Each pull tab 354 contains an end portion of pull cord 320, and provides convenient means for grasping and pulling the pull cord through the closure strip along the pouch, as shown in Fig. 24.

In the bag-forming method shown in Fig. 25, closure strip 318, already folded in half, is fed across an angled roller 356 and between the longitudinal edges 358 of bag film 254 as the film is folded within collar 326. A pair of heated sealing rollers 360 continuously seals the edge regions of the bag film to the overlapping closure strip. No insulating rail is necessary as the loop material of the closure strip, which in this case is sufficiently wide to extend across the entire sealing region, inhibits the bonding of the opposing inner surfaces of the closure strip (as discussed further below with respect to Figs. 36 and 37). After passing through edge sealing jaws 342, the folded edge 362 of the bag film is trimmed away along line 364, leaving the ends of the pouches opposite the closure strip open for receiving materials to be packaged. The series of pouches may then be spooled into a roll for sale or later filling.

Fig. 26 shows a method of making bags from two separate sheets of bag film and the above-described bag closure strip. Upper and lower plastic films 368 and 370, respectively, are unspooled continuously, with either a pre-folded

closure strip, or pre-engaged hook and loop strips 372, fed between them as shown. An insulating rail 374 extends between the hook and loop strips, temporarily disengaging the hooks from the loops, as the hook and loop strips are each permanently welded to respective inner sides of the plastic films between
5 two rotary sealing rolls 376 (only the upper roll is shown). The parallel films and fastener strips are then welded together at spaced intervals by transverse heated sealing jaws 378, forming side seals between adjacent bags which are then filled from their open ends (not shown) and closed by upper and lower sets of sealing jaws 380. This process is also useful, for instance, for forming a series of pre-
10 made bags to be rolled or stacked for later filling.

The bag 382 formed by this process has four side seals 384, as shown in Fig. 26A, along with closure 372. The side seal 384 adjacent and parallel to closure 372 is ripped off to open the bag and expose the closure. In another embodiment (not shown) the side seal 384 adjacent and parallel to closure 372 is
15 omitted, along with the upper set of sealing jaws 380 in Fig. 26, and a folded closure strip (e.g., strip 318 of Fig. 25) is inserted in place of separate strips 372, with the fold of the closure strip pointing outward toward the adjacent side of the continuous films. In another embodiment, producing an "inverted" closure arrangement similar to that shown in Fig. 36, the folded closure strip is fed
20 between the plastic films with its fold extending away from the adjacent edge of the films.

The closure strip also provides, in some instances, a broad, external bag surface for carrying text, logos or other marketing indicia. In Fig. 27, a produce bag 400 is formed generally of loosely woven plastic mesh to provide
25 unobstructed air circulation and a clear view of the quality of the enclosed produce. The plastic mesh is formed into a bag with a fold at the bottom edge 402 and is either sewn or thermally fused along its two sides 404, one of which may remain open until the contents are inserted. A wide closure strip 406 sewn or welded to the plastic bag mesh at the upper end of the bag provides a solid
30 surface 408 printed with appropriate marketing indicia and information, which may be applied to the closure strip either before or after it is attached to the

plastic mesh forming the rest of the bag. In other instances, the broad outer face of the closure strip provides a support for securing adhesive labels (not shown) printed with such information. In the example shown, the closure strip is thermally welded to the plastic mesh in regions 410 (while an insulating rail, not shown, is disposed between the inner closure strip surfaces to prevent permanent bonding between the sides of the closure strip, as discussed above). For convenient handling, a C-shaped slit 412 is cut through both sides of the closure strip outboard of its hook and loop bands, to form a carrying handle. In other applications, air circulation holes may be provided through the closure strip sides, as necessary.

As shown in Fig. 28, closure strip 406 is of similar construction to the closure strip of Fig. 1, but with some modification. Notably, the overall width of closure strip 406 is about 6.2 inches, with a fastener band separation distance W_D of about 3.9 inches, providing sufficient width for printing with the closure edges either outboard or inboard of the plastic bag mesh. The width W_E of both the hook and loop bands 106 and 104, respectively, is about 0.75 inch, with 3/8 inch wide outer edge regions having thickened weld zones 414.

The detail of the center features of the closure strip is shown in Fig. 29. Grasping rib 416 is offset slightly from the centerline 418 (i.e., the midline between the hook and loop bands), such that when the closure strip is folded, the grasping rib will be biased to lie on a predetermined side of the fold, avoiding variability in hook/loop band alignment caused by the fold line fluctuating between the two sides of the rib. Rib 416 has both a width W_F and a height H_F of about 1/32 inch, and is immediately adjacent a shallow groove 420 extending along the length of the closure strip, of a width W_G of about 1/32 inch and a depth, d_G , of about 0.002 inch. Groove 420 provides some space for rib 416 with the closure folded at centerline 418. Spaced apart from the rib and groove are tear control features. These include a continuous rip-stop rib 422 of height H_H of about 0.002 inch immediately outboard of a continuous tear-propagation groove. Two preferred tear-propagation groove profiles are shown. On the left of Fig. 29, groove 424a is of square profile with sharp bottom corners for concentrating

stress during tearing. On the right of Fig. 29, groove 424b is of triangular profile with a single, acute corner at its center for concentrating stress. For reasons explained above, to form this pattern of features the mold roll is preferably equipped with a single plate or ring of width W_J , having a contoured outer surface for forming all of the features shown. The nominal thickness of the closure base, t_b , is about 0.006 inch in this instance, but for different applications will be selected between about 0.004 and 0.030 inch.

As shown in Fig. 30, the thickened weld zones 414 near the edges of the closure strip extend a distance d_w of about 0.012 inch from the base of the closure strip (giving these areas, which have a width W_K of about 0.120 inch, an overall thickness of about 0.018 inch). Without adjusting the profile of the extrusion die or otherwise varying the amount of entering resin along the length of the nip as the closure strip is formed, the practical maximum thickness and width of weld zones 414 will depend on the flow properties of the resin as well as the pressures and temperatures involved. Thickening the closure strip in the areas intended to be welded to other bag materials provides more resin available for flow and bonding during welding. In addition, the greater closure strip mass absorbs more heat and helps to keep the inside surfaces of the closure strip base from being welded together. Thicker materials are also less sensitive to fluctuations in welding conditions, enabling more consistent bonding.

For some applications, the closure strip provides loop-engageable hook elements on the outer surface of the bag, such as for attaching the packaged product to a display or other support surface. For example, Fig. 31 shows a closure strip 426 at the upper end of a bag 428, having a band 430 of molded hook fastener elements extending from its outer surface and exposed for engaging loop fibers. The closure strip may include a grasping rib 132 as shown, and be configured to tear above band 430, such that the outer hooks remain on the opened bag. Alternatively, the closure strip may be configured to tear between band 430 and the top edge of the bag film, in which case the grasping rib may be unnecessary. The hooks of band 430 are useful, for instance, for hanging bag 428 from a display rack covered with loop material. For stringing multiple bags

together, a mating band of loops (not shown) may be provided elsewhere on the outer surface of the bag, such that band 430 of each bag engages the exposed loop band of an adjacent bag of the string. Fig. 31 also illustrates an example of the weld-insulating loop material arrangement discussed below with respect to

5 Figs. 36 and 37.

Optionally, closure strip 426 may include an outer band 432 of loop material, extending from a side of the bag opposite the exposed band 430 of hooks, for securing bags together in a stack. In another embodiment (not shown), the closure strip has an exposed band 432 of loops, but no exposed band 430 of
10 hooks, and is hung thereby from a display rack having extending hook elements.

Fig. 32 shows a machine arrangement for producing closure strip 426 of Fig. 31. A first resin 434 is extruded into a nip between a hook-forming mold roll 154 and a smooth pressure roll 156, along with loop material 104 to form the primary loop band of the closure and, optionally, loop material 432 to form the
15 secondary (i.e., outer) loop band of the closure. The cooling resin travels with the mold roll to a second nip between roll 154 and a secondary hook-forming mold roll 436, where it is joined by a second flow of resin from extruder 438. The flow of resin from extruder 438 is much narrower than the resin traveling on roll 154, and is only applied in specific strips corresponding to the secondary
20 (i.e., outer) hook bands formed on the closure strip. The resin from extruder 438 is forced into hook-forming cavities in roll 436 by nip pressure, and cools as the closure strip travels on the surface of roll 436 until the secondary hooks are pulled from their cavities at roll 440. Thus, the primary hook band 106 and the secondary hook band 430 are formed by rolls 154 and 436, respectively, and are,
25 in some applications, formed of different resins. As will be readily understood from this example, other machine configurations will produce similar products. For example, the upstream mold roll may be employed to mold the secondary hooks and closure base, with the downstream mold roll (i.e., the upper mold roll in Fig. 32) forming the primary hooks. In such case, the primary loop material
30 104 would preferably be introduced against roll 156.

Referring now to Figs. 33 and 34A, pouch 442 includes a closure strip 444 sealed along its two edges to bag film 446 with welds 330. Along its lower edge, the closure strip is welded on its outer face; at its upper edge it is welded on its inner face. In the illustrated embodiment, closure 444 differs from the closure 5 100 of Fig. 1 in that its tear rib 132 extends from the face opposite the face on which its loop and hook bands 104 and 106, respectively, are carried. Additionally, rib 132 contains a pull cord 320 as described above with respect to Figs. 22-24. Rib 132 is formed in a corresponding groove in the pressure roll opposite the hook-forming mold roll in a Fischer-type process, with pull cord 320 10 introduced to the resin of the closure strip in the groove. Located on the inside face of the pouch as shown, pull cord 320 of rib 132 is torn through the entire thickness of the closure strip base as it is pulled outward (in the direction of arrow "G" in Fig. 34A) to open the pouch. Alternatively, rib 132 may be located on the same side of the closure strip as the hook and loop bands (as in strip 100 of 15 Fig. 1), with appropriate tear features extending along either side of the rib to facilitate tearing of the closure strip, even without an embedded pull cord 320. In yet another embodiment (not shown), pull cord 320 is simply disposed at the inner face of the closure strip (without an enclosing base thickening or rib) and is pulled through the base in the direction of arrow "G" to open the pouch. Such a 20 configuration is produced by introducing the pull cord to the resin in the molding nip in a Fischer-type process, on the pressure roll side of the resin, without a rib-forming groove in the pressure roll.

As shown in Fig. 33, a c-shaped pull tab 448 is formed at one edge of the pouch by die cutting the outline of the pull tab through the rib 132 and base of the 25 closure strip 444 within a non-sealed region 450 within the side seal 452 of the pouch, without cutting through the bag film behind the closure strip. Because the closure strip is not bonded to the bag film (forming the back side of the pouch) within region 450, the cut pull tab is free to be grasped and pulled across the face of the pouch between the hook and loop bands of the closure strip, opening the 30 pouch as shown in Fig. 34B. Alternatively, a hole may be provided through the layer of bag film at 450, thereby leaving tab 448 exposed for grasping. Lettering

454 is shown in Fig. 33, printed on the exposed face of the closure strip to indicate the location of the pull tab. As an alternate means of exposing the pull cord to be grasped, in another embodiment (not shown) a narrow width of closure strip 444 containing pull cord 320 is left extending beyond the edge of the bag film, exposed to be pulled through side seal 452 and across the face of the pouch. Seal 452 may be configured as a peelable weld if necessary to enable the grasping rib or pull cord to be pulled through the seal without breaking.

After being opened, pouch 442 may be closed by folding over the upper edge of the pouch such that the hook and loop bands 106 and 104 of the closure strip 444 overlap and engage, as shown in Fig. 34C. Re-opening the pouch entails simply disengaging the touch fastening and unfolding the pouch top.

To form pouch 442, closure strip 444 is first sealed along what will become its lower edge to one edge of a continuous sheet of bag film. The closure/film combination then proceeds through the pouch-forming process known in the art, in place of the bag film alone. As a final step before adjacent pouches are severed from one another, the pouches are filled through their upper ends before the upper weld 330 is formed between the closure strip and the bag film, to seal the pouch. Also note that this closure strip arrangement has the advantage that the loop and hook bands 104 and 106 of the closure strip do not generally come into contact with the pouch contents, making such an arrangement particularly applicable to pouches containing fibrous or similar materials which may become embedded in the hook or loop bands and decrease the effectiveness or cosmetic appeal of the closure over time. In another sequence, not illustrated, the closure strip is sealed to the film after the bag film is center-folded.

The closure strip is configured, in some cases, to be folded over upon itself multiple times after opening to form a substantially water-tight seal. For example, the closure strip 456 of home dry-cleaning bag 458 of Figs. 35A-35D is of sufficient width, as compared to the placement of its loop and hook bands 104 and 106, so as to be readily folded over twice after opening, to engage the hook and loop bands to form a releasable closure (Fig. 35D). As with the embodiment

of Fig. 33, the hook and loop bands of the closure remain separated from the bag contents as they are carried on the outside of the bag. To effect the overlap of the hook and loop bands when the bag top is folded over twice, the loop band 104 is disposed much closer to the grasping rib 132 at the upper edge of the bag than is the hook band 106. The appropriate relative dimensions required to effect such an overlap will be apparent from the sequential illustration of Figs. 35B-35D. As the two separated sides of closure strip 456 are folded over together twice, two distinct folds 460a and 460b are formed. The ability of these folds to form a seal against gas or liquid penetration will depend upon the tightness of the folds and the viscosity of the fluid to be sealed, among other things, but such folds will form effective seals for many applications, such as in bags for home dry-cleaning kits as described in U.S. Pat. 5,238,587, the contents of which are incorporated herein by reference. For such applications in which the bag does not have to remain sealed prior to use, the upper edge of the bag containing rib 132 may be severed from the bag during bag production, such that the bag is sold in an open condition as in Fig. 35B. As another alternative, the closure strip may be in the form of two separate strips, a hook strip and a loop strip, each strip forming one side of the closure and being separately welded to the bag film.

For some applications, the bag closure is welded between two separate film sheets to form a bag. Fig. 36 shows one such bag closure 462 welded to bag side sheets 464a and 464b, forming what we call an "inverted" closure. The side sheets of the bag extend beyond the closure strip and are themselves welded together to form the upper edge 466 of the bag. After the closure strip has been bonded to the bag sides, and the side edges of the bag sealed (not shown) the bag is filled from its other end, in the direction of arrow "J", which is then sealed to close the bag. To initially open the bag, edge 466 is pulled, tearing the bag side sheets along perforations 468. Next, the closure strip is forced open and the closure strip web is pulled in two along a tear groove 470 at the closure strip fold. To reclose the bag, the loop and hook bands 104 and 106 of the closure strip are simply pressed together.

The welding pattern shown in Fig. 36 provides the anti-peel advantages discussed above, as the inner edge of the loop side of the closure strip remains unbonded to bag side sheet 464b. One method of forming such a weld pattern is shown in Fig. 37, in which closure strip 462 is simultaneously welded to both bag side sheets 464a and 464b by heated jaws 472 and 474, respectively.

Advantageously, loop material 104 is arranged on the folded closure strip to overlap both inner and outer closure strip weld zones, inhibiting any permanent welding together of the sides of the closure strip. For applications in which a small amount of bonding between the inner faces of the closure strip is acceptable (or desirable), a chilled jaw 476 against the loop side of the bag adjacent the inner weld zone prevents any undesirable bonding of the inner edge of the loop side of the closure to bag side sheet 464b.

As an alternative to applying the closure strip to the bag film as the bag film is formed into bags, the closure strip may be pre-applied to the bag film, and both spooled together into rolls. Such configurations are particularly useful in the subsequent formation of bags on standard bag-making machines not equipped for the application of closure strips. For example, Figs. 38A through 38C show spooled or rolled film products consisting of a continuous sheet of thin plastic film permanently bonded to one or more continuous lengths of closure products.

In Fig. 38A, closure strip 318 is centered upon the bag film 254, such as for forming bags with the process illustrated in Fig. 20. In Fig. 38B, closure strip 444 is sealed along one edge of bag film 446 to form rolled product 482, such as for forming pouch 442 of Fig. 33. In Fig. 38C, separate lengths of hook and loop products 484 and 486, respectively, are bonded to opposite edges of film 488 to form rolled product 490, which may be run through standard form/fill processes to incorporate resealable closures into longitudinal fin seals.

Referring to Fig. 39, bag 500 consists of a piece of polyethylene bag material folded once to form the bottom edge 502 of the bag, joined to a closure 504 to form the upper edge 505 of the bag, and permanently sealed along the remaining two sides 506 and 508 by welding the material of the front face of the bag to the material of the back face of the bag. Although illustrated as a flat bag,

bag 500 may be constructed in other forms, such as a pouch with a lower pleated end for standing the pouch upright on its lower edge.

Referring to Fig. 40, to initially open the sealed bag, the upper edge 502 is grasped in one hand 510 and the front face of the bag is grasped in the other hand 512, on either side of a frangible channel 514 extending along closure 504. By only grasping or pinching the front face of the bag with hand 512, and not the back face of the bag, pulling the front face of the bag away from the upper edge places a high tensile load across channel 514, propagating a tear along channel 514 that creates an opening 515 into the bag.

As shown in Fig. 41A, the bag material of the back side 516 of the bag is welded to the back (i.e., non-fastening) side of the reclosable closure 504 at 518. The bag material of the front side 520 of the bag is welded to the closure along an edge region 522 of the front (i.e., fastening) side of the closure 504. With the closure so attached to the bag material, and sealed along the sides of the bag (see Fig. 39), the closure provides an airtight, liquid-tight seal at one end of the bag.

The front face of closure 504 carries a strip 524 of fibrous loops, in non-woven form and partially embedded within the base resin of the closure, and a strip 526 of hook-shaped fastener elements molded out of resin of the base in rows extending along the length of the closure. After being initially opened by pulling apart the closure along groove 514, the bag may be reclosed by folding its upper edge about the opening created by tearing the closure, releasably engaging the strip 524 of loops with the strip 526 of hooks (Fig. 41B).

Referring to Figs. 42 and 43, closure 504 is a strip of polyethylene having an overall width "W" of about 1.5 inches (38 millimeters) and a nominal thickness "T" of about 0.004 inch. Loop band 524 has a width w_L of about 0.5 inch (12 millimeters), and hook band 526 a width w_H of about 0.375 inch (9.5 millimeters). The hook and loop bands are separated by a distance w_c of about 0.29 inch (7.4 millimeters), at the center of which is formed groove 514 that is 0.002 inch (0.05 millimeter) deep and extends over a width w_G of about 0.036 inch (0.9 millimeter). Thus, at groove 514, the closure has a reduced thickness T_G of only about 0.002 inch (0.05 millimeter). The remaining width of the

closure strip forms an open weld flange 527 outboard of the band 526 of fastener elements for welding or otherwise attaching the closure strip to the bag material. Extending in many parallel rows on either side of groove 514 throughout the area of the closure separating the hook and loop bands is an array of rip-stop features
5 528 unitarily molded with the front face of the closure strip.

As shown in Fig. 44, the rip-stop features 528 are hump-shaped protrusions that are longitudinally offset from the protrusions of adjacent rows to form a checkerboard matrix of bumps for limiting tear propagation from the tear channel. With a height of only about 0.006 inch (0.15 millimeter) from the face
10 of the closure, the rip-stops 528 are substantially shorter than the engageable hook elements, such that the rip stops do not interfere with the engagement of the fastener elements or the folding of the bag after opening.

Referring to Fig. 45, bag 500' is of construction similar in all aspects to that of above-described bag 500, except for the configuration of the attachment of
15 the bag material of the front face 520 of the bag to the lower edge of closure strip 504. In this case, the weld zone 522 between the bag material and the closure strip is spaced apart from the free edge 530 of bag material 520, such that the distal edge of the bag material forms an exposed, cantilevered pull flap 532 extending along the entire width of the bag. Thus, to open bag 500' by bursting
20 the closure strip along its tear groove, one hand grasps the upper edge 505 of the bag as with bag 500, but the other hand, rather than pinching the broad expanse of bag material forming the front face, grasps the convenient pull flap 532. The construction of bag 500' may be particularly advantageous where incidentally pinching the contents of the bag is to be avoided, for instance.

25 Another pull flap configuration is illustrated in Fig. 46. In this case, the upper edge 534 of the front face bag material is securely welded to the front face of closure 504, without leaving a graspable end exposed along its entire length, but the bag material is pre-cut to form an extending tab 536 of bag material at the center of the bag.

30 Referring to Fig. 47, bag 550 is of similar construction to the bags already described, except that its closure 552 has, in place of the frangible channel or

groove, a tear rib 554 of substantially greater thickness than the base of the closure. Tear rib 554 extends along the closure midway between the loop and hook bands and is adapted to be grasped at one end 556 and pulled to separate the tear rib from the rest of the closure material along the width of the bag.

5 To enhance the graspability of the end 556 of tear rib 554, two features are formed in the bag and closure material adjacent the tear rib end, preferably by cutting methods. First, a notch 558 is formed in the bag material forming the back side of the bag, immediately behind tear rib end 556, big enough to enable the grasping of the tear rib end independent of the bag material but not extending
10 through the entire width w_s of the edge seal (if the integrity of the unopened bag seal is to be maintained). Second, two slits 560a and 560b are made through the base of closure 504 and extending at an angle from the bag edge 562 to, but not through, tear rib 554. The base of the closure between slits 560a and 560b thus forms a pull tab 564 with a wide distal end, free of any bag material, for
15 improved graspability.

Referring to Fig. 48, another bag-making process features applying the closure strip in discrete lengths across the bag film (i.e., transversely), instead of longitudinally as earlier described. Bag film 254 is unspooled from a roll 570 and onto filling tube 256 over guide forms 262, as described above with respect
20 to Fig. 15. However, in this case individual lengths 572 of closure strip are advanced across the bag film and permanently attached to the film, such as by thermal welding, at bag-length intervals. Preferably, the attachment of the closure strips occurs while the bag film is paused between film advancements, such as while a bag at the lower end of the tube is being sealed and severed. In
25 this manner, inclusion of the closure strips requires very little modification in the bag-making apparatus. As an alternative to attaching the closure strips 572 to the bag film 254 as it is unrolled into the bag-making apparatus, roll 570 may be provided with the closure strips pre-applied at proper intervals.

Referring also to Fig. 49A, the closure strip 572 is in one example folded
30 over upon itself as attached to the bag film 254, with the bands of hooks and loops engaged to hold the closure in its folded condition. One side of the closure

strip is welded to the bag film in areas 574, while the other side of the closure strip is left unattached until welded to an opposing surface of the bag film below the filling tube (e.g., by sealing bars 264). Thus, closure strip 572 is positioned at one end of the final bag, with its fold either directed outward or inward as
5 desired. The sides of the bag may be joined to form the adjacent end edge of the bag to form an additional end seal. If necessary to hold the closure strip in its folded condition as the bag film is advanced onto the filling tube, the ends of the closure strip may be tacked together.

An alternative closure strip configuration is shown in Fig. 49B. In this
10 case, the closure strip 572' is supplied as two separate fastener strips – a loop strip 576 and a hook strip 578 – that are engaged to each other along their length. Both fastener strips are permanently attached to bag film 254 along weld lines 574, on either side of a tear line 580 (e.g., a row of perforations or a continuous score) in bag film 254. Closure strip 572' may be positioned in the final bag at
15 any point along the length of the bag, which is opened by bursting tear line 580 and separating the loop and hook bands of fastener strips 576 and 578. The bag is reclosed by pressing the hook and loop bands back together.

Referring to Figs. 50A and 50B, closure strips 582 and 584 are advantageously provided with peelable seals 586 that act as secondary closure
20 means. Peelable adhesives are well known in the industry, and provide an air and liquid tight seal that is relatively easy to open without tearing the underlying substrate. In some cases, seal 586 is of a material which becomes effectively non-tacky when initially opened. In other cases, seal 586 is of a material which retains its tackiness so as to continue to provide some sealing when the bag is
25 reclosed. In closure strip 582 (Fig. 50A) the peelable seal 586 is located inboard of the primary hook and loop closure 588, so as to protect the loops and fastener elements from contamination from bag contents. In closure strip 582' (Fig. 50B) the peelable seal 586 is located outboard of the primary hook and loop closure 588 and must be opened to access the primary closure. The peel seal may be
30 formed by applying a peelable adhesive, such as a pressure sensitive adhesive, to the front face of the closure strip. In some cases, the adhesive is applied in two

discrete regions on the face of the strip, such that the adhesive of the two regions comes together to form the seal. Such peelable seals can provide a higher pantry life (i.e., a longer useful life after the bag has been initially opened) for the bag contents.

5 Referring to Fig. 51, a closure strip 590 has mating bands of hook-shaped fastener elements 592. In one band, extending from one side 594 of the closure strip, the fastener elements all face to the left, while from the other side 596 of the closure strip the fastener elements all face to the right. As the bands of fastener elements 592 are pressed further together from the position shown, the
10 tips of the hook-shaped fastener elements interlock to engage the two bands of elements. When pulled apart, the flexible tips extend to clear the tips of the other band of elements and then snap back to their original hook shape. This is one example of what is known in the closure industry as "self-engaging" fasteners – those in which the engaging fastener elements are of a similar structure. Other
15 forms of self-engaging fastener elements include mushrooms, for example, such as the "DUAL-LOCK" fastener product marketed by Minnesota Mining and Manufacturing, Inc. With self-engaging hook-shaped fastening, we prefer to mold the hooks to have a greater thickness " t_h " than the spacing " s_r " between adjacent rows of elements (as shown in Fig. 52), such that the bands cannot be
20 separated by moving one side of the closure strip laterally across the rows of fastener elements of the other side of the closure strip. The CFM-15 and CFM-29 hook shapes marketed by Velcro USA in Manchester, New Hampshire, can be useful for self-engaging fasteners. The hook-shaped fastener elements should be spaced along their rows so as to provide sufficient clearance for the tips of a
25 mating row of hooks to extend between adjacent hooks of the row. The optimal spacing will depend upon the selected hook shape and the strength of engagement desired. With mating arrays of mushroom-type fastener elements, the mushroom density of the opposing arrays should be different to avoid "dead-heading" the mushrooms (i.e., forcing the mushroom heads to deform rather than causing their
30 stems to bend). One array may have, for example, a fastener element density on the order of about 50 to 200 fastener elements per square inch, while the density

of fastener elements in the other array is of the order of about 500 to 2000.

Optimal density matches will depend upon the desired engagement and disengagement loads, among other things. Self-engaging bands of fastener elements may be substituted for the loop and hook bands of any of the above-described closure strips to form self-engaging closures for various applications.

5 Preferably, whether hook and loop bands or self-engaging fastener bands are employed, the mating bands of the closure are advantageously configured to be engaged with a very low engagement force. We measure engagement force by measuring the facial load required between mating halves of a one-inch long
10 length of closure strip to engage the closure. Disengagement peel force is measured as the load required to peel such a one-inch strip of closure apart. The closure can provide an advantageously low engagement force of, for instance, less than about one pound over a lineal inch of the closure, and a low disengagement peel force of less than about two pounds per lineal inch.

15 Materials other than polyethylene, such as polypropylene, polyester, nylon, and other thermoplastics and their co-polymers, may be employed. For example, laminated or co-extruded bag films can have inner surfaces of a material weld-compatible with the material of the closure base, and an outer surface of a material chosen for other properties, such as durability or
20 impermeability.

 As evident from the embodiments described above, these closure strips are useful in many packaging applications, for providing a readily-engaged releasable closure that does not require perfect alignment during closing. The closures are useful for packaged food items, such as cookies, candy bars, and
25 even produce, and may be located at one sealed end or along a longitudinal seam of the package. By "bag", we mean to include all packages with flexible sides, including but not limited to standable pouches and flexible cartons.

 Other embodiments will be understood to fall within the scope of the following claims.

30

What is claimed is:

1. An elongated closure strip comprising:

a sheet-form resin substrate having a front face and a back face;

5 an array of loop-engageable fastener elements integrally molded with and extending from the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip; and

a loop strip carried on the front face of the substrate and forming a
10 discrete band of engageable loops extending along the length of the closure strip and spaced apart from the band of fastener elements;

the loop strip arranged to be engaged by the array of fastener elements when the substrate is folded along a fold line extending between the loop strip and the array of fastener elements.

15

2. The closure strip of claim 1 wherein the substrate has attachment regions extending along its length for permanently attaching the closure strip across a bag opening; the attachment regions being devoid of fastener elements and loops.

20

3. The closure strip of claim 2 wherein the attachment regions are disposed on the front face of the substrate.

4. The closure strip of claim 2 wherein the attachment regions are
25 disposed on the back face of the substrate.

5. The closure strip of claim 2 wherein the attachment regions are covered with a layer of adhesive for permanently attaching the closure strip across the bag opening.

5

6. The closure strip of claim 2 wherein the attachment regions comprise exposed resin of the substrate, for permanently welding the closure strip to opposite sides of a bag formed of a compatible material.

10 7. The closure strip of claim 1 wherein the substrate defines at least one frangible region extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, for tearing the substrate between the loops and the fastener elements, to open an associated bag.

15 8. The closure strip of claim 7 wherein the frangible region comprises at least one longitudinal groove extending along the substrate.

9. The closure strip of claim 8 wherein the frangible region comprises a pair of spaced apart, longitudinal grooves, and a longitudinal rib
20 integrally molded with and extending from the substrate between the pair of grooves.

10. The closure strip of claim 8 wherein the groove is defined on the front face of the substrate.

11. The closure strip of claim 8 further comprising a longitudinal rib integrally molded with and extending from the substrate adjacent the groove, on a side of the groove opposite the fold line, for resisting propagation of a tear from
5 the groove away from the fold line.

12. The closure strip of claim 7 wherein the frangible region comprises an embedded longitudinally continuous filament adapted to be torn from the closure strip to tear the substrate along the frangible region.

10

13. The closure strip of claim 12 wherein the filament is completely enclosed within a longitudinal rib integrally molded with and extending from the substrate between the band of loops and the band of fastener elements.

14. The closure strip of claim 13 wherein the longitudinal rib enclosing the filament is disposed on the back face of the substrate.

15. The closure strip of claim 1 further comprising a longitudinal rib integrally molded with and extending from the front face of the substrate between
20 the band of loops and the band of fastener elements.

16. The closure strip of claim 15 wherein the longitudinal rib is offset from the fold line.

17. The closure strip of claim 1 wherein the loop strip comprises a non-woven web of fibers.

18. The closure strip of claim 17 wherein the web has a basis weight
5 of less than about 4 ounces per square yard.

19. The closure strip of claim 18 wherein the web has a basis weight of less than about 2 ounces per square yard.

10 20. The closure strip of claim 17 wherein the non-woven web comprises a needled web in a stretched condition.

21. The closure strip of claim 1 wherein the loop strip has width defined between two longitudinal edges thereof, fibers of the loop strip being
15 affixed to the substrate across said width.

22. The closure strip of claim 21 wherein fibers of the loop strip are encapsulated by resin of the substrate across said width.

20 23. The closure strip of claim 1 wherein the loop strip has a fiber density which is substantially constant across its width, and wherein the loop strip comprises discrete regions which are substantially more encapsulated by resin than other regions thereof.

24. The closure strip of claim 23 wherein said discrete regions are spaced apart longitudinally along the loop strip.

5 25. The closure strip of claim 23 wherein said discrete regions extend lengthwise along the loop strip and are spaced apart widthwise.

26. The closure strip of claim 23 wherein said discrete regions are arranged in a checkerboard pattern.

10

27. The closure strip of claim 1 wherein the loop strip has two longitudinal edge regions and a center region between the edge regions, the edge regions being affixed to the substrate and the center region being substantially loose from the substrate.

15

28. The closure strip of claim 1 further comprising, between the substrate and the loop strip, a barrier layer of a different material than the substrate.

20 29. The closure strip of claim 28 wherein the barrier layer comprises paper.

30. The closure strip of claim 28 wherein the barrier layer comprises polymer resin.

31. The closure strip of claim 1 wherein the substrate is formed of a polyethylene or of a material selected from the group consisting of polypropylene, polyester, nylon, copolymers of any of the foregoing, and compatible mixtures that include at least one of the foregoing.

32. The closure strip of claim 1 further comprising an adhesive strip carried on the front face of the substrate between the band of fastener elements and the band of loops, the adhesive strip having an exposed surface arranged to contact the front face of the closure strip when the closure strip is folded to engage the loops with the fastener elements, to retain the closure strip in a folded state.

15

33. The closure strip of claim 1 further comprising:

a first adhesive strip carried on the front face of the substrate on one side of the fold line; and

a second adhesive strip carried on the front face of the substrate on the other side of the fold line; the first and second adhesive strips having exposed surfaces arranged to contact each other when the closure strip is folded to engage the loops with the fastener elements, to retain the closure strip in a folded state.

20

34. The closure strip of claim 1 further comprising a strip of peelable adhesive carried on the front face of the substrate for providing a peelable seal across the opening of an associated bag.

5 35. The closure strip of claim 34 wherein the strip of peelable adhesive is disposed between a longitudinal edge of the closure strip and both of the bands of fastener elements and loops.

10 36. The closure strip of claim 34 wherein the strip of peelable adhesive is disposed between the bands of fastener elements and loops.

37. The closure strip of claim 1 further comprising a layer of paper permanently adhered to the substrate.

15 38. The closure strip of claim 37 wherein the layer of paper is carried on the front face of the substrate, along a longitudinal edge region of the substrate.

20 39. The closure strip of claim 37 wherein the substrate has a back face opposite the front face, the paper being carried on the back face.

40. The closure strip of claim 37 wherein the layer of paper is disposed between a center region of the loop strip and the substrate.

41. The closure strip of claim 1 further comprising

a second array of loop-engageable fastener elements integrally molded with and extending from the back face of the substrate and forming a second
5 band of fastener elements extending longitudinally along the length of the closure strip, for hanging an associated package for display.

42. The closure strip of claim 41 further comprising a second loop strip carried on the back face of the substrate and forming a second discrete band
10 of engageable loops spaced apart from the second band of fastener elements, for engaging the second band of fastener elements of another package.

43. The closure strip of claim 1 further comprising a second loop strip carried on the back face of the substrate and forming a second discrete band of
15 engageable loops extending along the length of the closure strip, for hanging an associated package for display.

44. The closure strip of claim 1 wherein the substrate further defines multiple longitudinal rows of hump-shaped projections extending from its front
20 face between the fold line and each of the bands of loops and fastener elements.

45. A reclosable bag comprising:

a bag body having two opposing side walls joined along three edges to form therebetween a pouch having an open end; and

a closure strip permanently attached to the two side walls of the bag body along the open end, the closure strip comprising

a sheet-form resin substrate having a front face and a back face;

an array of loop-engageable fastener elements integrally molded with and
5 extending from the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip;
and

a loop strip carried on the front face of the substrate and forming a discrete band of engageable loops extending along the length of the closure strip
10 and spaced apart from the band of fastener elements;

the loop strip arranged to be engaged by the array of fastener elements to releasably retain the bag in a closed condition.

46. The bag of claim 45 wherein the substrate is continuous and solid
15 between the band of loops and the band of fastener elements and forms a seal to retain the bag in a sealed condition before the bag is opened.

47. The bag of claim 45 wherein the substrate of the closure strip is permanently affixed to the side walls of the bag body with adhesive.

20

48. The bag of claim 45 wherein the substrate of the closure strip is welded to the side walls of the bag body.

49. The bag of claim 48 wherein the substrate of the closure strip and the side walls of the bag body are both formed of the same resin, such as a polyethylene or of a material selected from the group consisting of polypropylene, polyester, nylon and copolymers and compatible mixtures that
5 include at least one of such resins.

50. The bag of claim 45 wherein the substrate of the closure strip defines at least one frangible region extending longitudinally along the length of the closure strip between the band of loops and the band of fastener elements, for
10 tearing the substrate between the loops and the fastener elements to open the bag.

51. The bag of claim 50 wherein the frangible region comprises at least one longitudinal groove extending along the substrate.

15 52. The bag of claim 51 wherein the frangible region comprises a pair of spaced apart, longitudinal grooves, and a longitudinal rib integrally molded with and extending from the substrate between the pair of grooves.

53. The bag of claim 50 wherein the frangible region comprises an
20 embedded, longitudinally continuous filament adapted to be torn from the closure strip to tear the substrate along the frangible region.

54. The bag of claim 53 wherein the filament is fully enclosed within a longitudinal rib extending from the back face of the substrate of the closure
25 strip and disposed inside the bag.

55. The bag of claim 53 wherein the filament has an end attached to a pull tab extending from one edge of the bag.

5 56. The bag of claim 53 wherein the bag defines a slit through an edge region of the bag but not extending into the interior of the bag, the slit defining a graspable pull tab within said edge region and containing an end of the filament.

10 57. The bag of claim 56 wherein the pull tab is defined between a pair of slits on either side of the filament and extending through an adjacent edge of the bag.

58. The bag of claim 45 wherein the loop strip of the closure strip comprises a non-woven web of fibers having a basis weight of less than about 4
15 ounces per square yard.

59. The bag of claim 45 wherein the closure strip further comprises a strip of peelable adhesive carried on the front face of the substrate for providing a peelable seal across the opening of the bag.

20

60. The bag of claim 59 wherein the peelable seal is disposed inboard of the bands of loops and fastener elements.

61. The bag of claim 59 wherein the peelable seal is disposed outboard of the bands of loops and fastener elements.

62. The bag of claim 45 wherein the back face of the closure strip
5 forms an outer surface of the bag, with the bands of loops and fastener elements carried on an inner surface of the bag.

63. The bag of claim 62 wherein the closure strip further comprises
a second array of loop-engageable fastener elements integrally molded
10 with and extending from the back face of the substrate and forming a second band of fastener elements extending longitudinally along the outer surface of the bag, for hanging the bag for display.

64. The bag of claim 63 wherein the closure strip further comprises a
15 second loop strip carried on the back face of the substrate and forming a second discrete band of engageable loops extending along the outer surface of the bag, for hanging the bag for display.

65. The bag of claim 45 wherein the front face of the closure strip
20 forms an outer surface of the bag, with the bands of loops and fastener elements carried on said outer surface of the bag.

66. The bag of claim 65 wherein both the band of loops and the band
of fastener elements are disposed on a front side of the bag, such that the fastener
25 elements engage the loops when an adjacent edge of the bag is folded over.

67. The bag of claim 66 wherein the substrate of the closure strip defines a frangible region between the bands of loops and fastener elements, the frangible region running along one side of the bag and configured to be torn to
5 open the bag.

68. The bag of claim 67 wherein the frangible region is configured to be torn by applying a transverse tensile load across the frangible region.

10 69. The bag of claim 68 wherein the frangible region of the substrate is weaker with respect to a transverse tensile load than the side walls of the bag and the attachment between the side walls of the bag and the bag closure.

70. The bag of claim 68 wherein the side wall forming the front side
15 of the bag has an exposed tab for grasping and pulling the front side of the bag to tear the frangible region of the closure strip.

71. The bag of claim 70 wherein the tab extends across the front side of the bag.

20

72. The bag of claim 65 wherein the bands of loops and fastener elements are disposed on opposite sides of the bag, such that the fastener elements engage the loops when an adjacent edge of the bag, formed by a fold in the closure strip, is folded over twice.

73. The bag of claim 72 wherein, with the closure strip is folded over twice, adjacent layers of the substrate together form a barrier to fluids.

5 74. The bag of claim 45 wherein the side walls of the bag are attached to the closure strip along the back face of the closure strip.

75. The bag of claim 74 wherein one edge of the bag is formed by a fold along the substrate of the closure strip between the bands of loops and
10 fastener elements.

76. The bag of claim 74 wherein the substrate forms a fold between the bands of fastener elements and loops, with the fold of the substrate directed toward the interior of the bag.

15

77. The bag of claim 76 wherein the substrate is solid and continuous between the side walls of the bag, to form a seal across the bag opening until the bag is initially opened.

20 78. The bag of claim 76 wherein the side walls of the bag are joined together outboard of the longitudinal edges of the closure strip to form a seal until the bag is initially opened.

79. The bag of claim 45 wherein at least one longitudinal edge of the closure strip is disposed inside the bag and unattached to the sides of the bag except at the edges of the bag.

5 80. The bag of claim 45 wherein the substrate of the closure strip carries printed indicia thereon.

81. The bag of claim 45 wherein the substrate of the closure strip defines a hole forming a graspable handle for carrying the bag.

10

82. A continuous sheet-form product useful for forming bags, the product comprising

a continuous sheet-form film; and

15 a length of closure strip permanently bonded to the film, the closure strip comprising

a sheet-form resin substrate having an exposed front face;

a loop strip carried on the front face of the substrate and comprising a discrete band of hook-engageable loops extending along the length of the closure strip; and

20 an array of loop-engageable fastener elements integrally molded with resin of the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops.

83. The sheet-form product of claim 82 wherein the closure strip is continuous and extends along the film centerline.

84. The sheet-form product of claim 82 wherein the closure strip is
5 continuous and extends along one edge of the film.

85. The sheet-form product of claim 82 wherein the closure strip extends transversely across the film.

10 86. A continuous sheet-form product useful for forming bags, the product comprising

a continuous sheet-form film; and

multiple lengths of closure strip extending transversely across the film at spaced intervals and permanently bonded to the film, each length of closure strip
15 comprising two overlapping substrates, each substrate bonded separately to the bag film on opposite sides of an associated frangible region of the film;

a loop strip carried on the front face of the first substrate and comprising a discrete band of engageable loops extending along the length of the closure strip; and

20 an array of loop-engageable fastener elements extending from the second substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure;

the first and second substrates overlapped as bonded to the film such that the bands of loops and fastener elements overlap for engagement.

87. The continuous sheet-form product of claim 86 wherein the fastener elements are integrally molded with resin of the front face of the second substrate.

5

88. A method of fabricating a closure strip, the method comprising:

molding a continuous, sheet-form substrate having a band of fastener elements integrally molded with and extending from a front face of the substrate; and

10 attaching a continuous strip of loop material to resin forming the front face of the substrate to form a discrete band of loops spaced apart from the band of fastener elements.

89. The method of claim 88 wherein the step of molding includes
15 forming the substrate to have a longitudinal frangible section arranged to be disposed between the band of loops and the band of fastener elements.

90. The method of claim 89 wherein the frangible section of the substrate defines at least one longitudinally extending groove therein, the step of
20 molding including forming the groove in the substrate as the substrate is formed.

91. The method of claim 90 wherein the groove is formed in the front face of the substrate.

92. The method of claim 90 wherein the frangible section defines a pair of longitudinally extending grooves in the substrate.

93. The method of claim 92 wherein the step of molding further
5 includes simultaneously forming a longitudinal rib extending from the substrate between the grooves.

94. The method of claim 88 wherein the step of molding includes
10 simultaneously forming a longitudinal rib extending from the substrate, the rib arranged to be disposed between the bands of fastener elements and loops.

95. The method of claim 94 wherein the rib is molded to be closer to one than the other of the bands of fastener elements and loops.

15 96. The method of claim 88 wherein the step of molding includes simultaneously embedding a longitudinally continuous filament in resin of the substrate.

97. The method of claim 96 wherein the filament is completely
20 enclosed by resin of a rib extending from one face of the substrate.

98. The method of claim 88 wherein the strip of loop material comprises a non-woven web of entangled fibers forming the loops and having a basis weight of less than about 4 ounces per square yard.

99. The method of claim 88 wherein the step of attaching comprises encapsulating fibers of the strip of loop material in resin of the substrate across the width of the strip of loop material.

5

100. The method of claim 88 wherein the strip of loop material has a fiber density which is substantially constant across its width, and wherein the step of attaching comprises permanently bonding discrete regions of the strip of loop material to the substrate while leaving other regions of the strip of loop material in a less bonded condition.

10

101. The method of claim 88 wherein the strip of loop material is permanently attached to the substrate after the substrate is molded.

15

102. The method of claim 101 wherein the strip of loop material is attached to the substrate by heating the front face of the substrate and thereafter pressing the loop material against the front face of the substrate with the front face of the substrate at an elevated temperature.

20

103. The method of claim 88 wherein the strip of loop material is permanently attached to the substrate as the substrate is molded.

104. The method of claim 103 wherein the steps of molding and attaching include

continuously feeding the strip of loop material through a nip defined between a rotating mold roll and a pressure roll, the rotating mold roll defining a multiplicity of cavities about its periphery for molding the fastener elements, while

- 5 continuously introducing molten resin to the mold roll under conditions which cause the resin to fill the cavities and form the substrate, such that pressure in the nip bonds the strip of loop material to resin of the substrate.

105. The method of claim 104 wherein the mold roll has two extending
10 ridges that form a pair of grooves in the substrate.

106. The method of claim 105 wherein the step of molding includes simultaneously forming a longitudinal rib extending from the substrate between the pair of grooves, the mold roll defining, between its two ridges, a channel for
15 forming the longitudinal rib.

107. The method of claim 103 wherein the steps of molding and attaching include

continuously feeding the strip of loop material through a gap defined
20 between a rotating mold roll and a stationary extrusion head, the rotating mold roll defining a multiplicity of cavities about its periphery for molding the fastener elements, while

continuously introducing molten resin to the gap under conditions which cause the resin to fill the cavities and form the substrate and to permanently
25 adhere to the strip of loop material.

108. The method of claim 107 further comprising, while continuously feeding the strip of loop material through the gap, continuously feeding a strip of preformed material through the gap between the strip of loop material and the
5 extrusion head, such that the preformed material inhibits the encapsulation of fibers of the strip of loop material in predetermined regions and the preformed material is incorporated into the closure strip.

109. The method of claim 108 wherein the preformed material is
10 selected from the group consisting of paper, fabric and plastic film.

110. The method of claim 108 wherein the preformed material defines perforations extending through its thickness.

15 111. The method of claim 103 wherein the steps of molding and attaching include

continuously feeding the strip of loop material through a nip defined adjacent the periphery of a rotating mold roll, the mold roll comprising at least one staking ring having a contoured outer edge and arranged to hold a
20 predetermined region of the strip of loop material against the resin under pressure in the gap.

112. The method of claim 111 wherein the outer edge of the staking ring comprises protrusions spaced about its periphery, the protrusions

corresponding to discrete regions of relatively greater encapsulation of the strip of loop material.

113. The method of claim 111 wherein the mold roll comprises
5 multiple staking rings arranged to produce a predetermined bonding pattern across the strip of loop material.

114. A method of fabricating reclosable bags, the method comprising
providing a continuous length of sheet-form bag wall material;
10 providing a continuous closure strip comprising
a sheet-form resin substrate having a front face;
a loop strip carried on the front face of the substrate and forming a discrete band of engageable loops along the length of the closure strip; and
an array of loop-engageable fastener elements integrally molded
15 with the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops;
permanently attaching the closure strip along the sheet-form bag wall material to form a continuous length of preform bag material; and
20 forming individual bags from the preform bag material.

115. The method of claim 114 wherein the step of attaching produces a preform tube of bag material, and wherein the steps of attaching and forming are

performed simultaneously in a vertical form and fill process, with the individual bags containing a predetermined quantity of material to be stored in the bags.

116. The method of claim 115 wherein the closure strip is attached to
5 longitudinal edges of the sheet-form plastic to form a fin seal of the preform tube.

117. The method of claim 116 wherein the closure strip is folded to form a fold extending outward, away from the preform tube.

10 118. The method of claim 117 wherein the fold defines a distal edge of the fin seal.

119. The method of claim 115 wherein the closure strip is folded to form a fold extending inward, toward the preform tube.

15

120. The method of claim 114 wherein the step of attaching produces a preform tube of bag material, and wherein the steps of attaching and forming are performed simultaneously in a horizontal form and fill process, with the individual bags formed about associated packages of material.

20

121. The method of claim 120 wherein longitudinal edges of the bag side wall material are brought together to form a fin seal with the closure strip folded longitudinally and disposed within the fin seal.

122. The method of claim 120 wherein longitudinal edges of the bag side wall material are brought together in a fin seal with the closure strip folded longitudinally about and attached to the longitudinal edges of the bag side wall material.

123. The method of claim 114 wherein the step of attaching includes folding the closure strip along its length to engage the bands of loops and fastener elements in an engagement zone, the loops and fastener elements holding their underlying regions of the substrate in spaced apart relation.

124. The method of claim 123 wherein the step of attaching further includes welding the bag side wall material to the back face of the substrate, the engagement zone providing a heat barrier to inhibit permanently welding the substrate together in its folded condition.

125. The method of claim 114 wherein the step of forming comprises folding the preform bag material along its centerline; and then forming transverse seals spaced along the preform bag material at bag length intervals to form a chain of open-ended bags.

126. The method of claim 125 wherein the closure strip is attached along the bag side wall material between longitudinal edges of said material, the preform bag material being subsequently folded at the closure strip to engage the bands of loops and fastener elements.

127. The method of claim 125 wherein the step of attaching comprises individually folding the bag side wall material and the closure strip; and then

5 joining the folded wall material and closure strip along their longitudinal edges to form a continuous tube of preform bag material.

128. The method of claim 127 wherein the step of forming comprises creating transverse seals across the tube of preform bag material to form a series
10 of discrete, empty bags.

129. The method of claim 114 wherein the bag side wall material is provided as two separate material sheets, the step of attaching comprising attaching the closure strip to one longitudinal edges of each sheet, such that the
15 preform bag material comprises the two material sheets joined at the closure strip, the step of forming individual bags comprising forming transverse seals across the preform bag material and joining the other longitudinal edges of the sheets of material to form a series of sealed bags.

20 130. The method of claim 114 wherein the closure strip contains an embedded pull cord, the step of forming including forming a graspable pull tab extending from an edge of each bag, the pull tab containing an end of the pull cord.

131. The method of claim 130 wherein the graspable pull tab is formed by slitting each bag in a side seal area thereof.

132. The method of claim 131 wherein the slitting cuts through the pull
5 cord but does not extend into the interior of the bag.

133. The method of claim 131 wherein the slitting forms two slits extending from an adjacent edge of the bag to the filament.

10 134. A method of fabricating reclosable bags in a vertical form and fill process, the method comprising

unrolling a continuous length of sheet-form bag film and directing the unrolled film over a forming head, advancing the bag film one bag length between pauses;

15 during each pause, attaching a length of closure strip across the unrolled bag film upstream of the forming head, each length of closure strip comprising

a sheet-form resin substrate having a front face;

a loop strip carried on the front face of the substrate and forming a discrete band of engageable loops along the length of the closure strip; and

20 an array of loop-engageable fastener elements integrally molded with the front face of the substrate and forming a discrete band of fastener elements extending longitudinally along the length of the closure strip and spaced apart from the band of loops; and

forming individual bags from the bag film, each bag having an associated length of closure strip.

135. A method of fabricating a closure strip, the method comprising:

5 molding a continuous, sheet-form substrate having a band of fastener elements integrally molded with and extending from a front face of the substrate; and

10 attaching a continuous strip of loop material to resin forming the front face of the substrate to form a discrete band of loops spaced apart from the band of fastener elements.

136. A method of forming a bag or package of disposable flexible packaging film or sheet having a surface of predetermined thermoplastic composition, the method comprising:

15 providing inter-engageable closure strip portions which are either separate strips or strip portions of a common member, at least a first of the closure strip portions providing an array of discrete fastener elements such as hook elements having crooks or hook elements of mushroom form, the fastener elements having stems integrally molded with and extending from a thermoplastic backing

20 substrate, the other of the strip portions providing an array of hook-engageable elements such as loops or fibers, or elements self-engageable with fastener elements of the first strip portion, the elements of the strip portions capable of forming a releasable closure, each of the strip portions having a backing surface comprised substantially of said predetermined thermoplastic composition of

25 which the surface of the film is formed; and

joining the backing substrates of said strip portions to respective portions of the surface of said plastic film or sheet by welding.

137. The method of claim 136 wherein, during welding, the fastener
5 elements of the respective strip portions are interengaged and the backings of the strip portions are simultaneously joined to respective portions of the sheet or film by application of energy to the respective sheet or film portions, insulating air pockets provided in the space created by the interengaged elements serving to limit thermal transfer and unwanted adhesion or bonding of the closure strip
10 portions to each other.

138. A method of applying a reclosable fastener to sheet or film, the method comprising:

providing inter-engageable closure strip portions which are either separate
15 strips or strip portions of a common member, at least a first of the closure strip portions providing an array of discrete fastener elements such as hook elements having crooks or hook elements of mushroom form, the fastener elements having stems integrally molded with and extending from a thermoplastic backing substrate, the other of the strip portions providing an array of hook-engageable
20 elements such as loops or fibers, or elements self-engageable with fastener elements of the first strip portion, the elements of the strip portions capable of forming a releasable closure, and

joining the backing substrate of said strip portions to respective portions of the surface of said film or sheet with application of energy, such as heat,
25 acoustic or radio-frequency energy, to produce, for example welding or adhesive bonding, wherein, during the joining, the fastener elements of the respective strip portions are interengaged and the backing substrates of the strip portions are

simultaneously joined to respective portions of the sheet or film with application of energy to the respective sheet or film portions, insulating air pockets provided in the space created by the interengaged elements serving to limit thermal transfer and unwanted adhesion or bonding of the closure strip portions to each other.

- 5 139. A method of applying a recloseable fastener to sheet or film, the method comprising:

 providing inter-engageable closure strip portions which are either separate strips or strip portions of a common member, at least a first of the closure strip portions providing an array of discrete fastener elements such as hook elements
10 having crooks or hook elements of mushroom form, the fastener elements having stems integrally molded with and extending from a thermoplastic backing substrate, the other of the strip portions providing an array of hook-engageable elements such as loops or fibers, or elements self-engageable with fastener elements of the first strip portion, the elements of the strip portions capable of
15 forming a releasable closure, and

 joining the backing substrate of said strip portions to respective portions of the surface of said film or sheet with application of energy, such as heat, acoustic or radio-frequency energy, to produce, for example welding or adhesive bonding, wherein, during the joining, the fastener elements of the respective strip
20 portions are interengaged and the backing substrate of the strip portions are simultaneously joined to respective portions of the sheet or film with application of energy to the respective sheet or film portions, and

 cooperating parts of the releasable closure being of material that is incompatible or of significantly different melting temperature such that, under
25 conditions of joining, the interengaged elements do not tend to adhere to each other or detrimentally deform.

140. The method of any one of claims 136 through 139 wherein bases of loops or fibers of the second strip portion are encapsulated by and secured by thermoplastic resin of the backing substrate of the respective closure strip
5 portion, the loops or fibers being comprised of resin, such as polyester, that is incompatible with or has a higher melt temperature than the resin, such as polyolefin, of the respective backing substrate, and/or of components of the opposed first strip portion, such that, under conditions of joining, the dissimilarity of the material of the loops or fibers serves to prevent detrimental change to the
10 loops or fibers or detrimental adhesion or bonding of the loops or fibers to the first closure strip portion, preferably, the mass of the hook elements of the first portion being substantially greater than that of the loop elements, the thermal mass of the hook elements being sufficient to prevent undue distortion of the hooks during the joining action.

15

141. The method of any one of claims 136 through 140 performed during vertical form and fill packaging.

142. The method of any one of claims 136 through 140 performed
20 during horizontal form and fill packaging.

143. The method of any one of claims 136 through 140 performed during pouch making.

25 144. The method of any of the claim 136 through 143 in which the surface of the sheet to which the backing

1/33

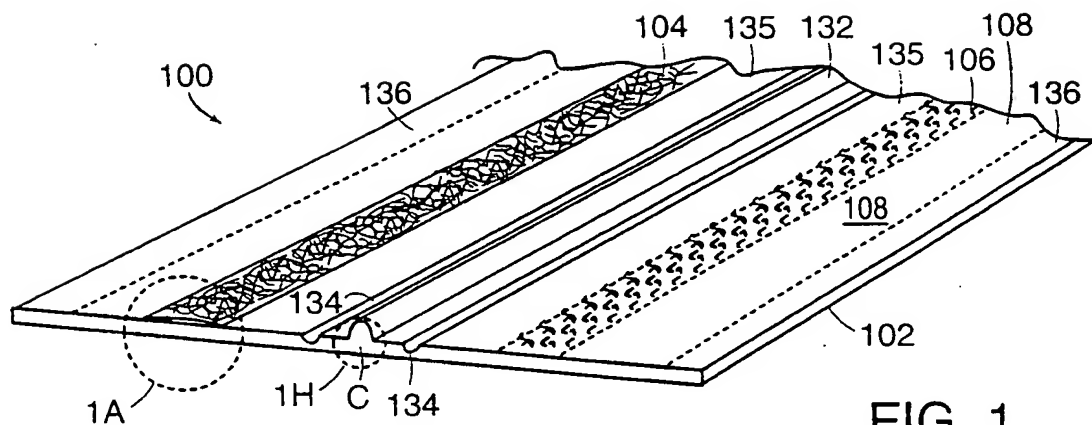


FIG. 1

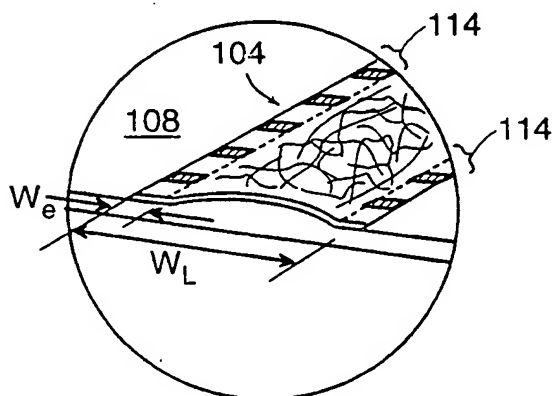


FIG. 1A

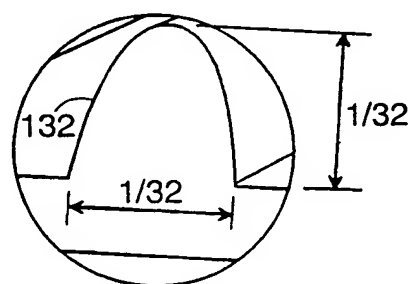


FIG. 1H

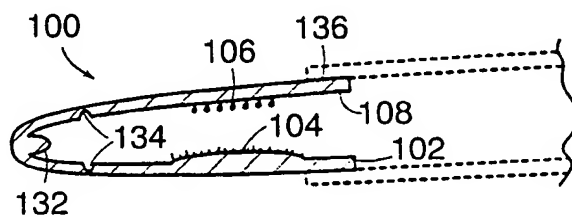


FIG. 3

2/33

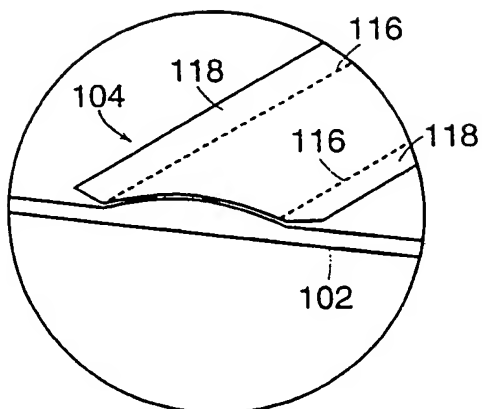


FIG. 1B

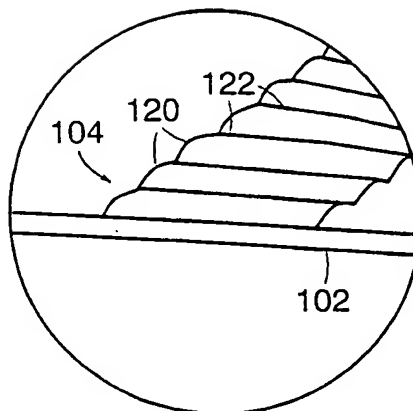


FIG. 1C

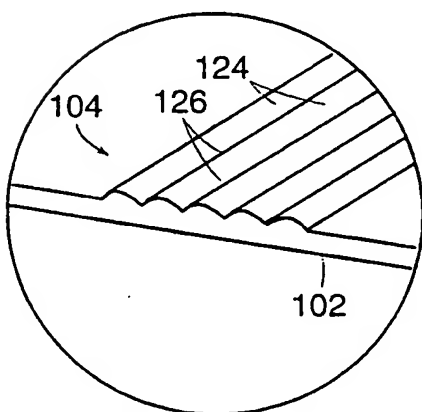


FIG. 1D

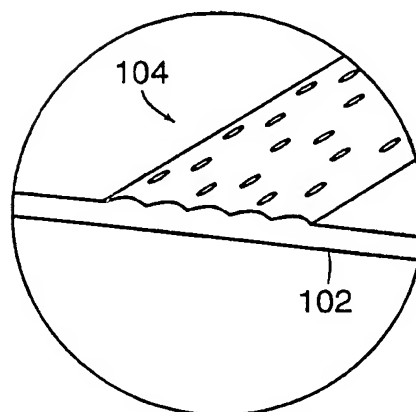


FIG. 1E

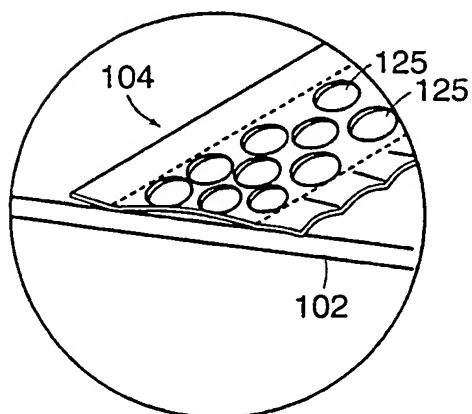


FIG. 1F

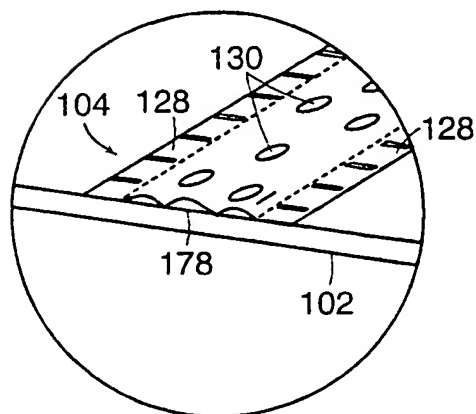


FIG. 1G

3/33

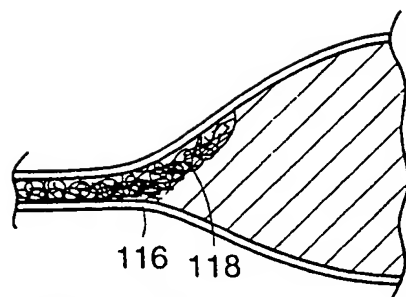


FIG. 2A

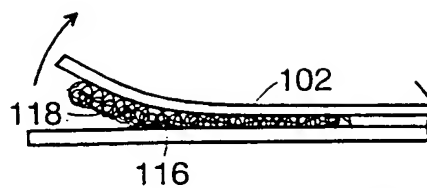


FIG. 2B

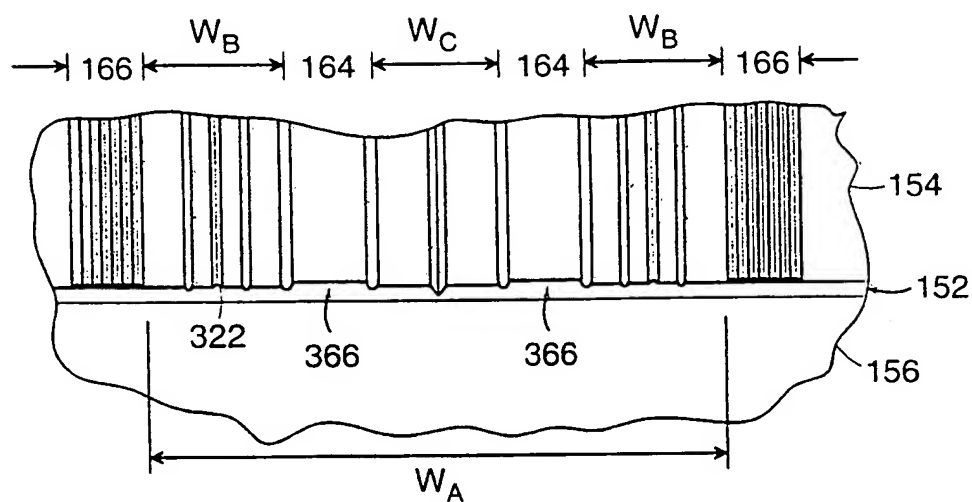


FIG. 8

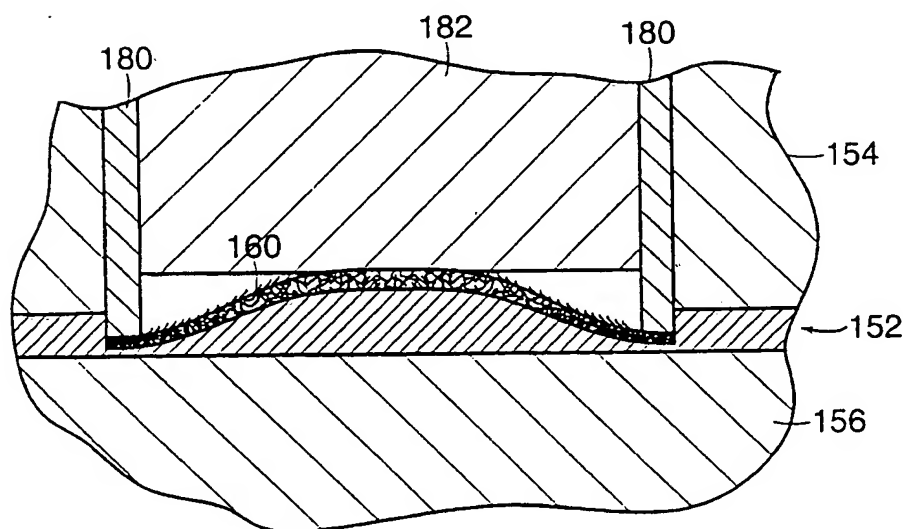


FIG. 9

4/33

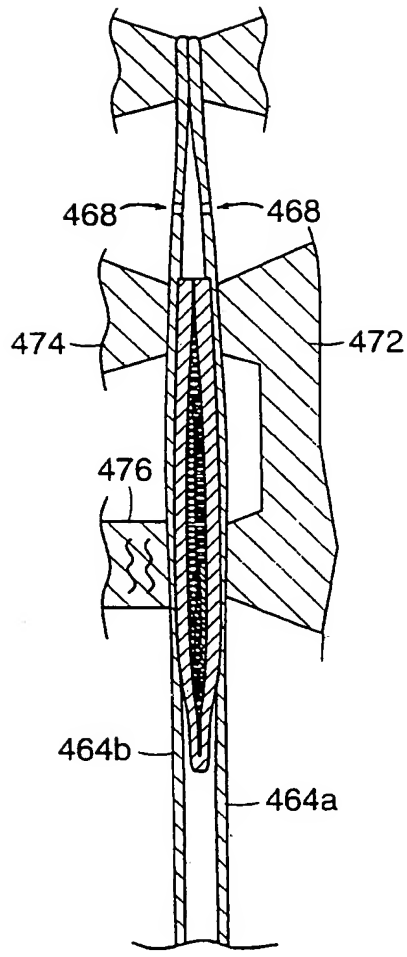


FIG. 37

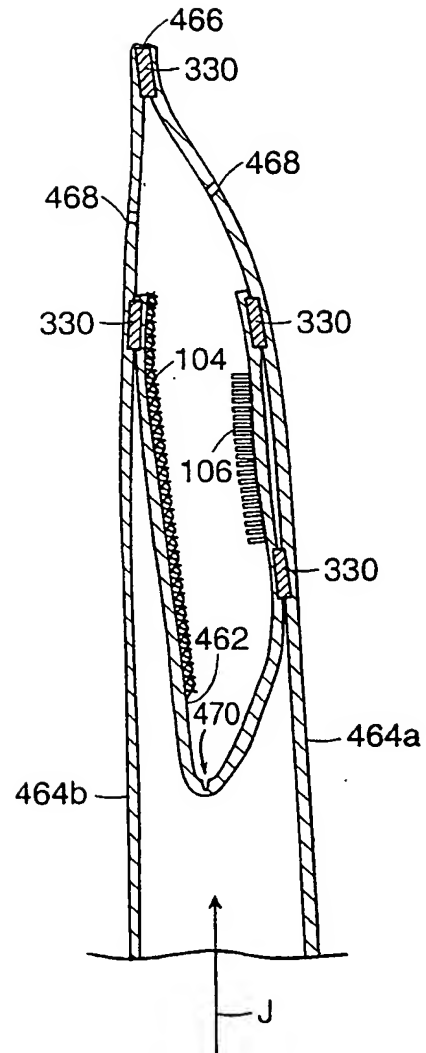


FIG. 36



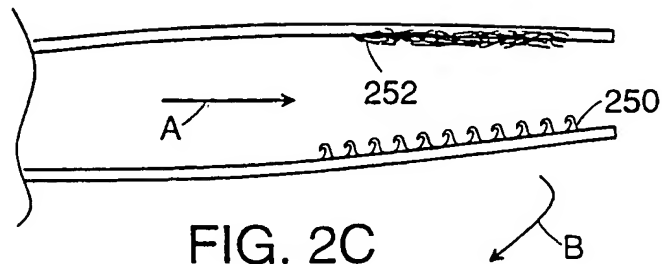


FIG. 2C

5/33

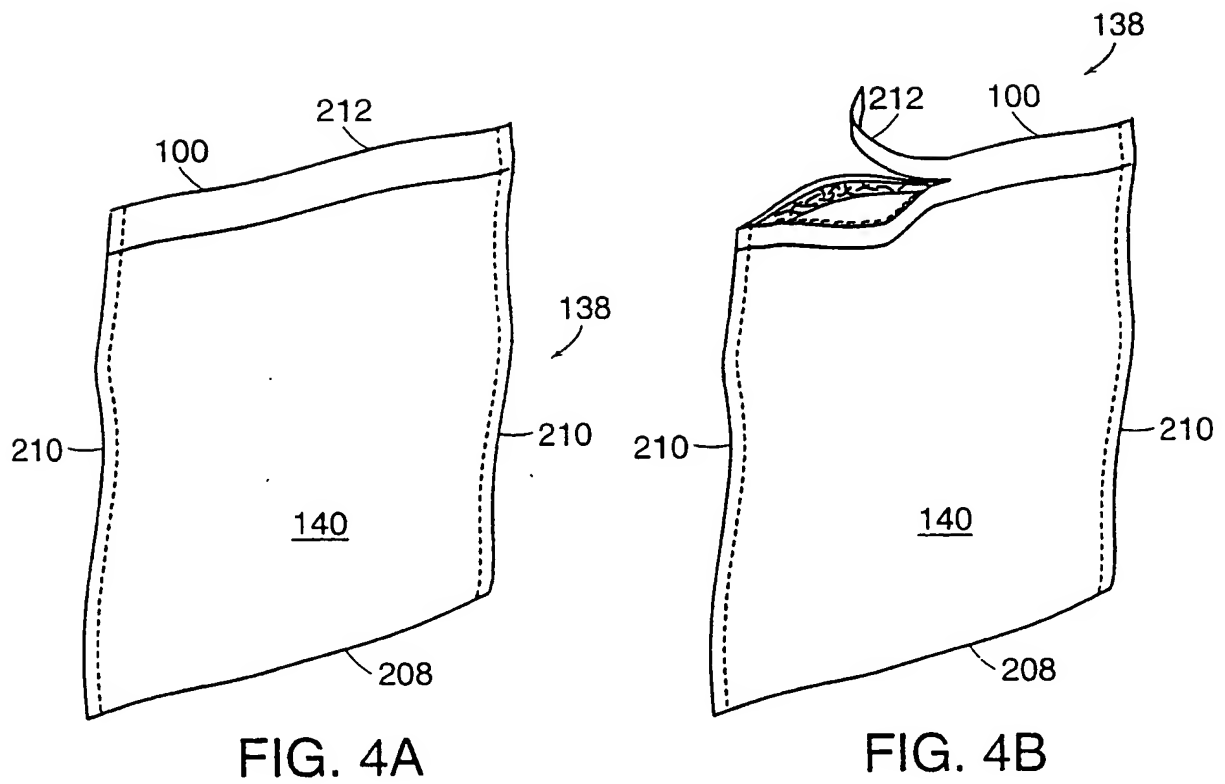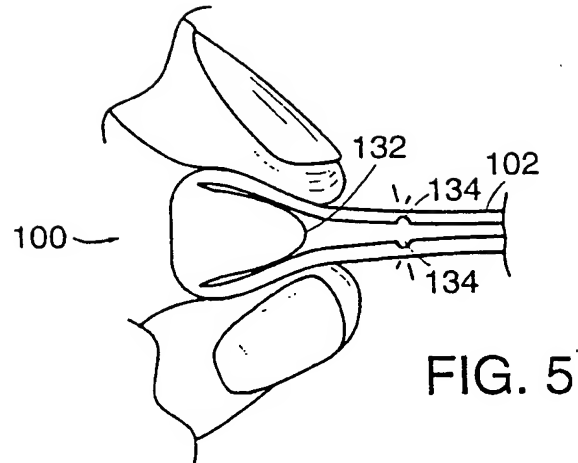

6/33

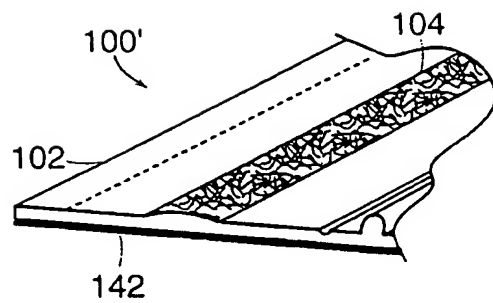


FIG. 6

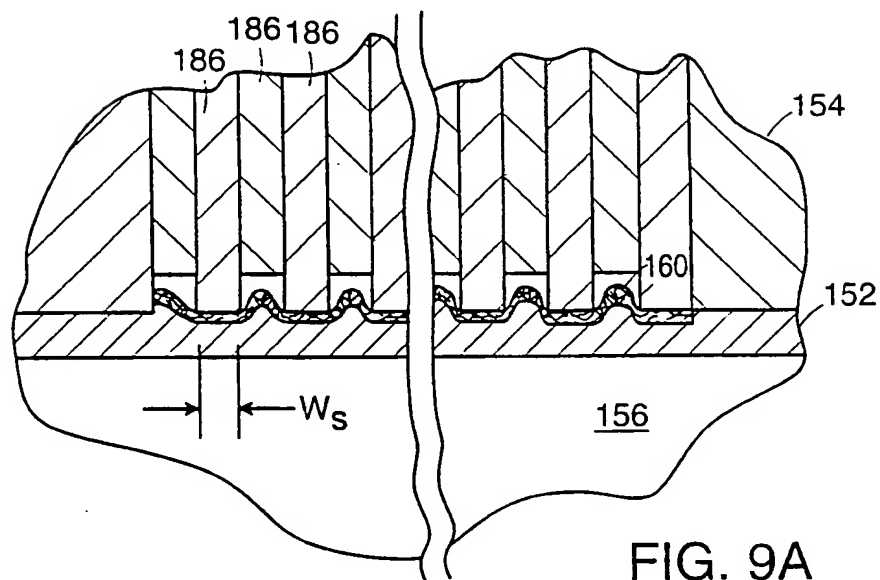


FIG. 9A

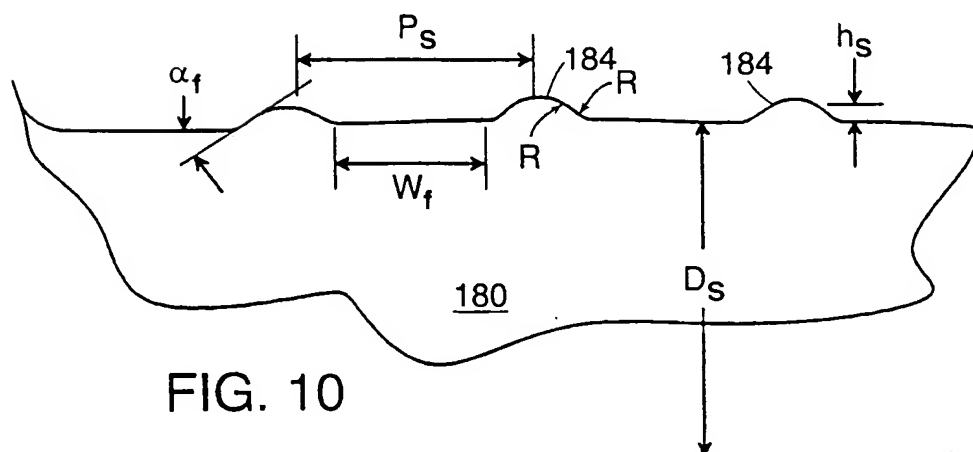


FIG. 10

7/33

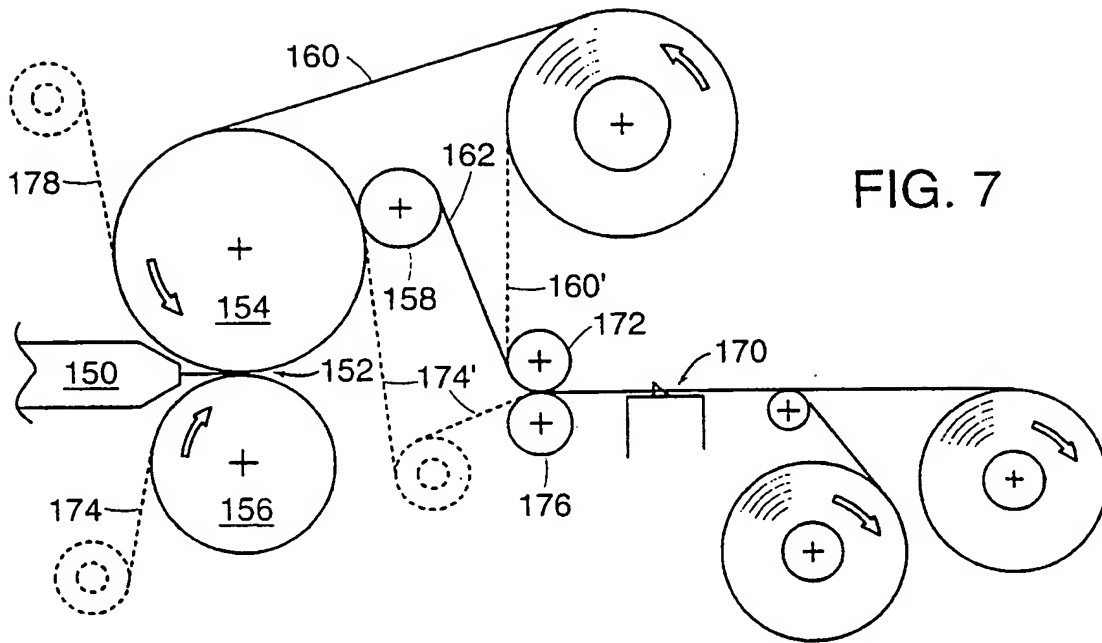


FIG. 7

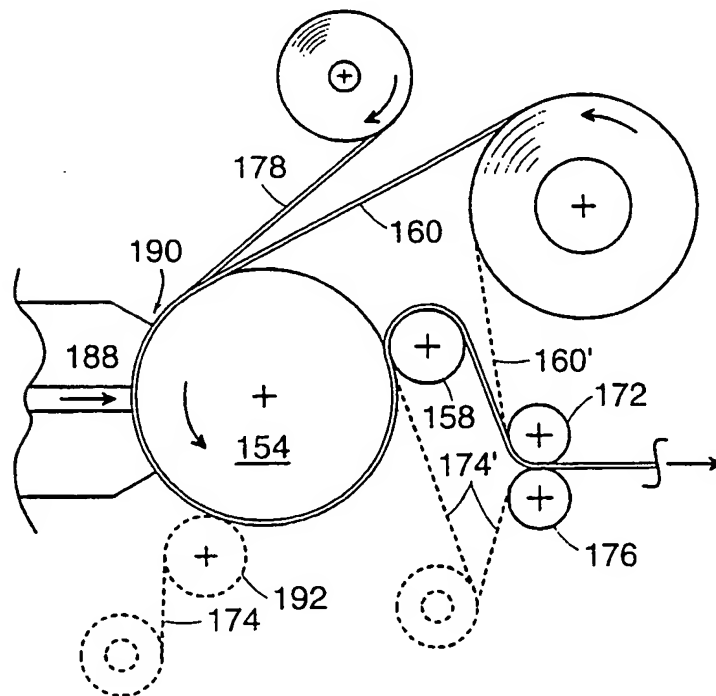


FIG. 11

8/33

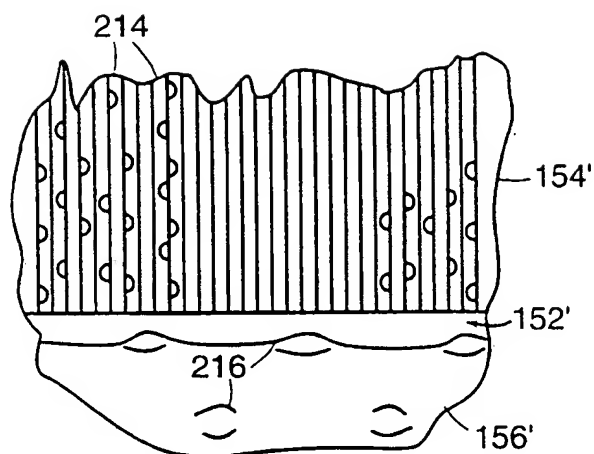


FIG. 12

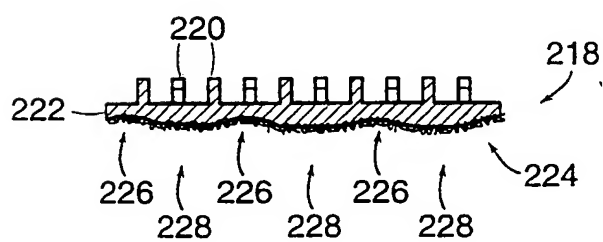


FIG. 13

9/33

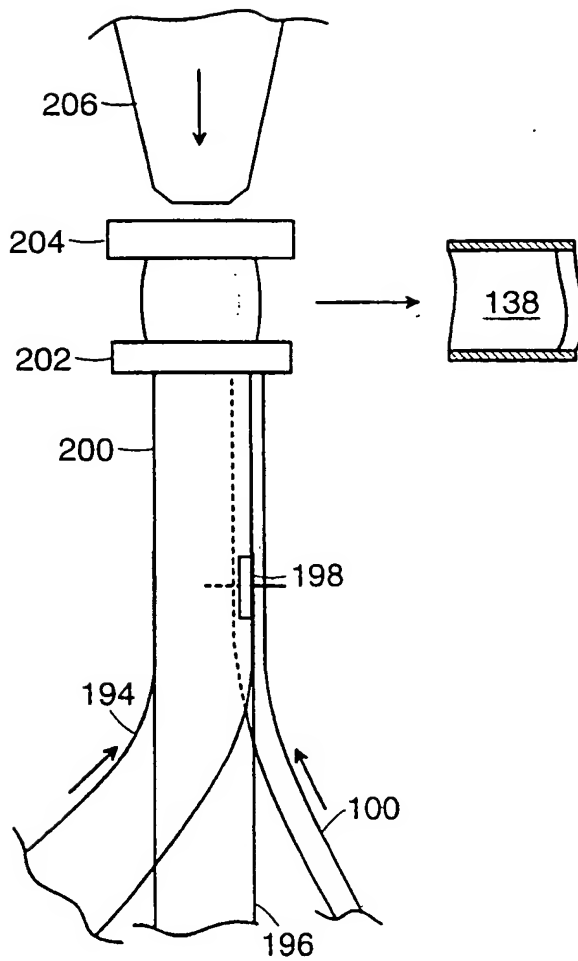


FIG. 14

10/33

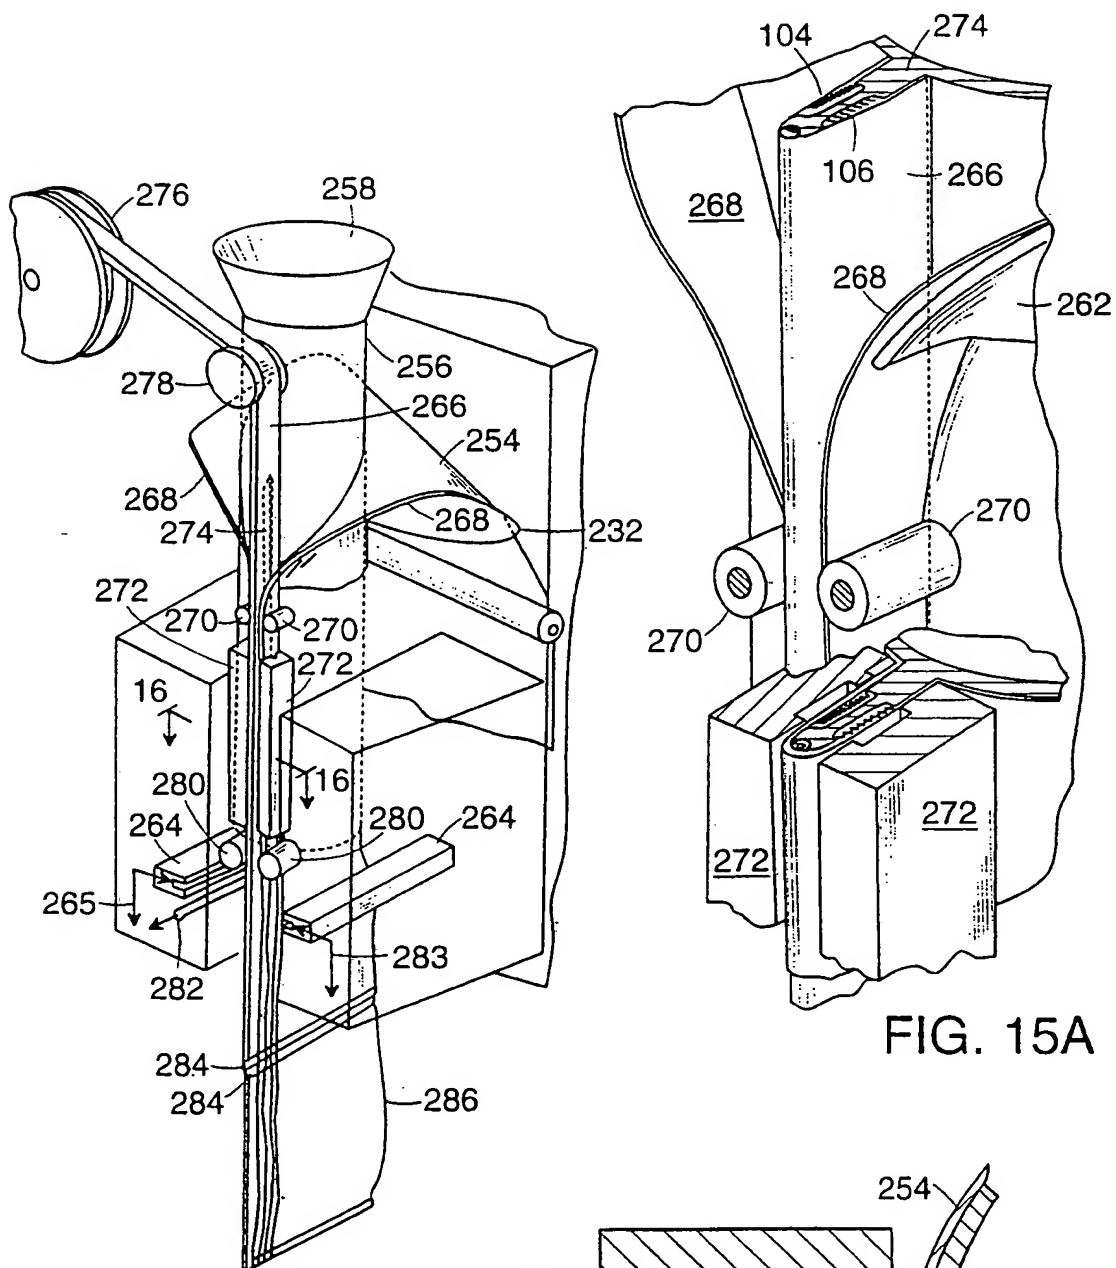


FIG. 15

FIG. 15A

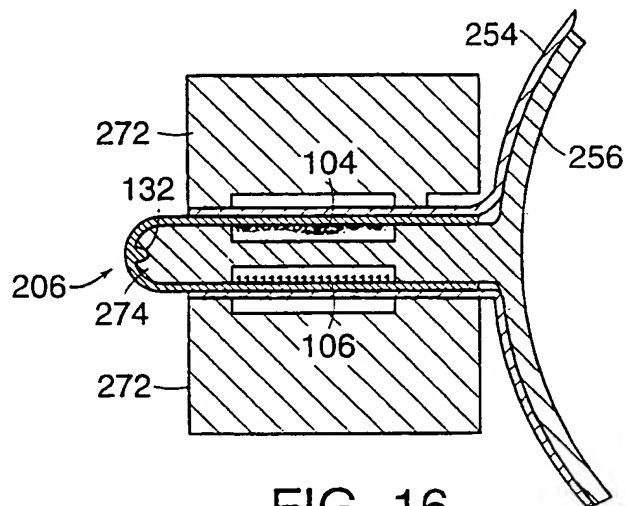


FIG. 16

11/33

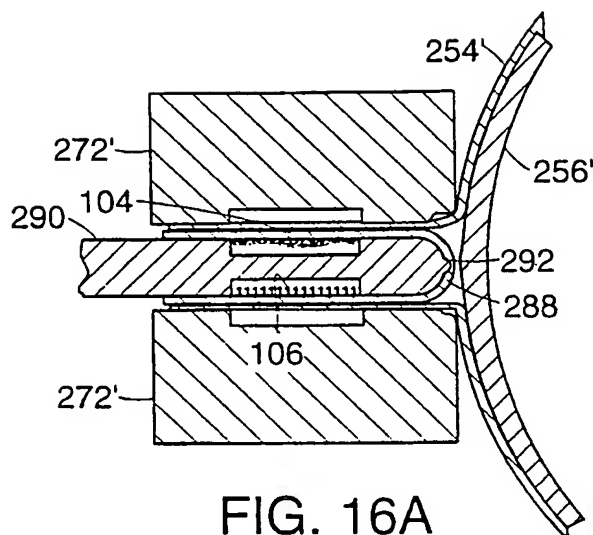


FIG. 16A

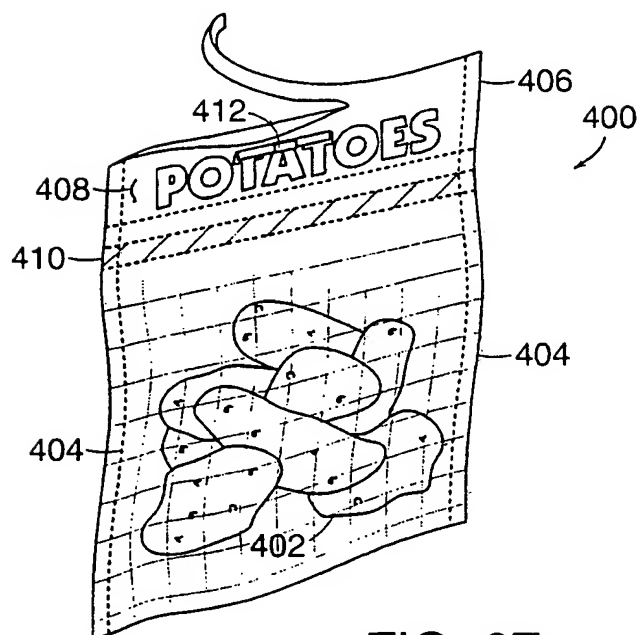


FIG. 27

12/33

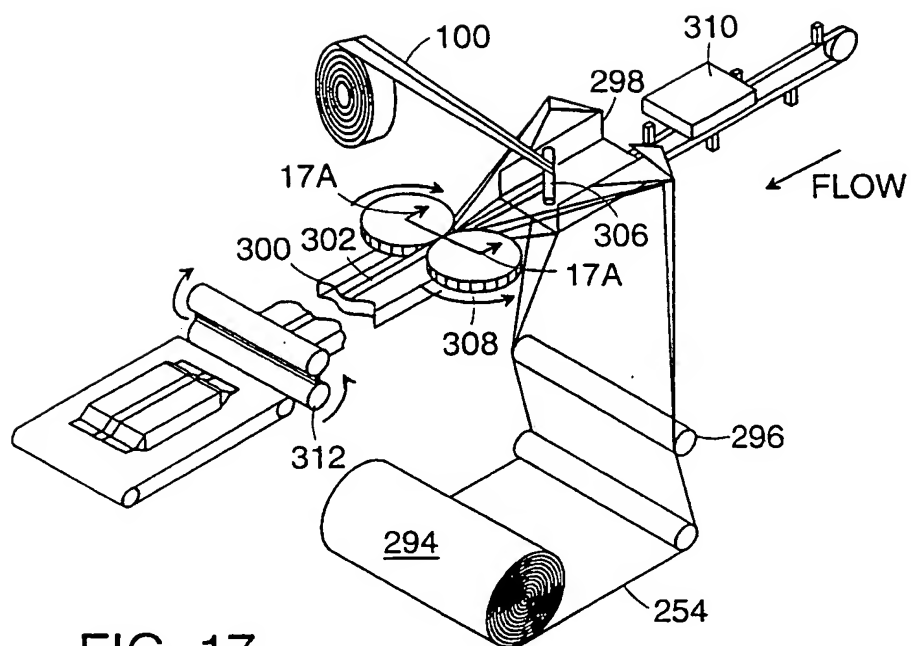


FIG. 17

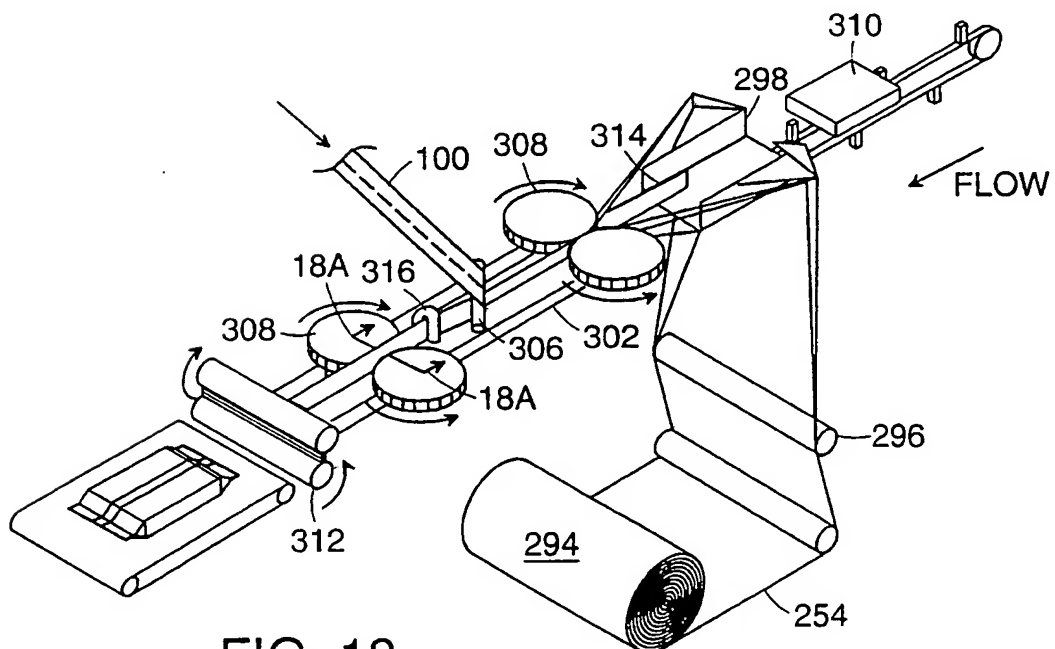


FIG. 18

13/33

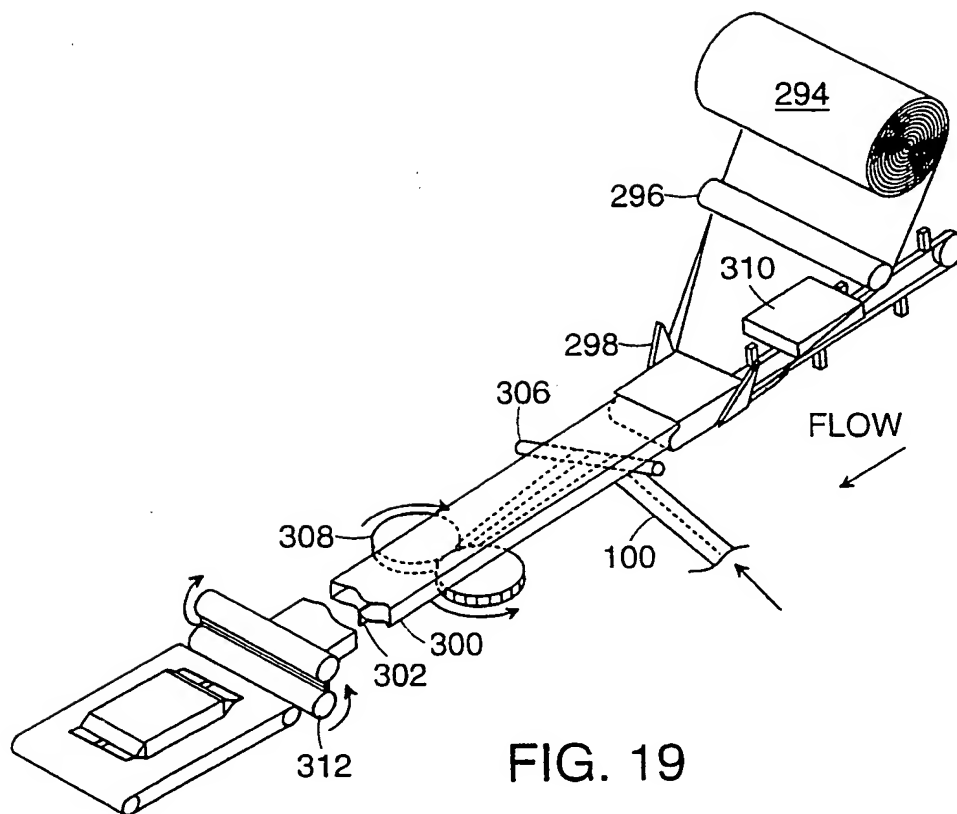


FIG. 19

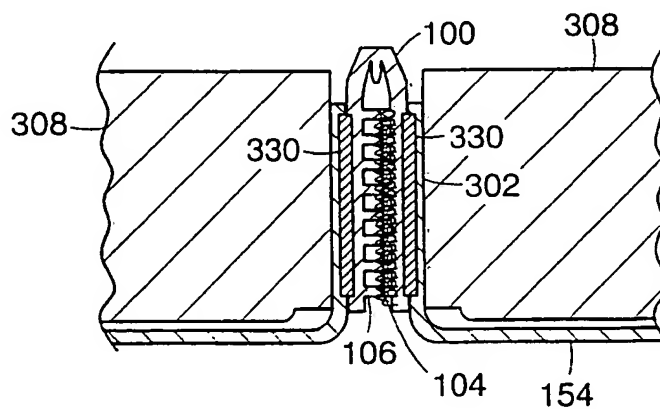


FIG. 17A

14/33





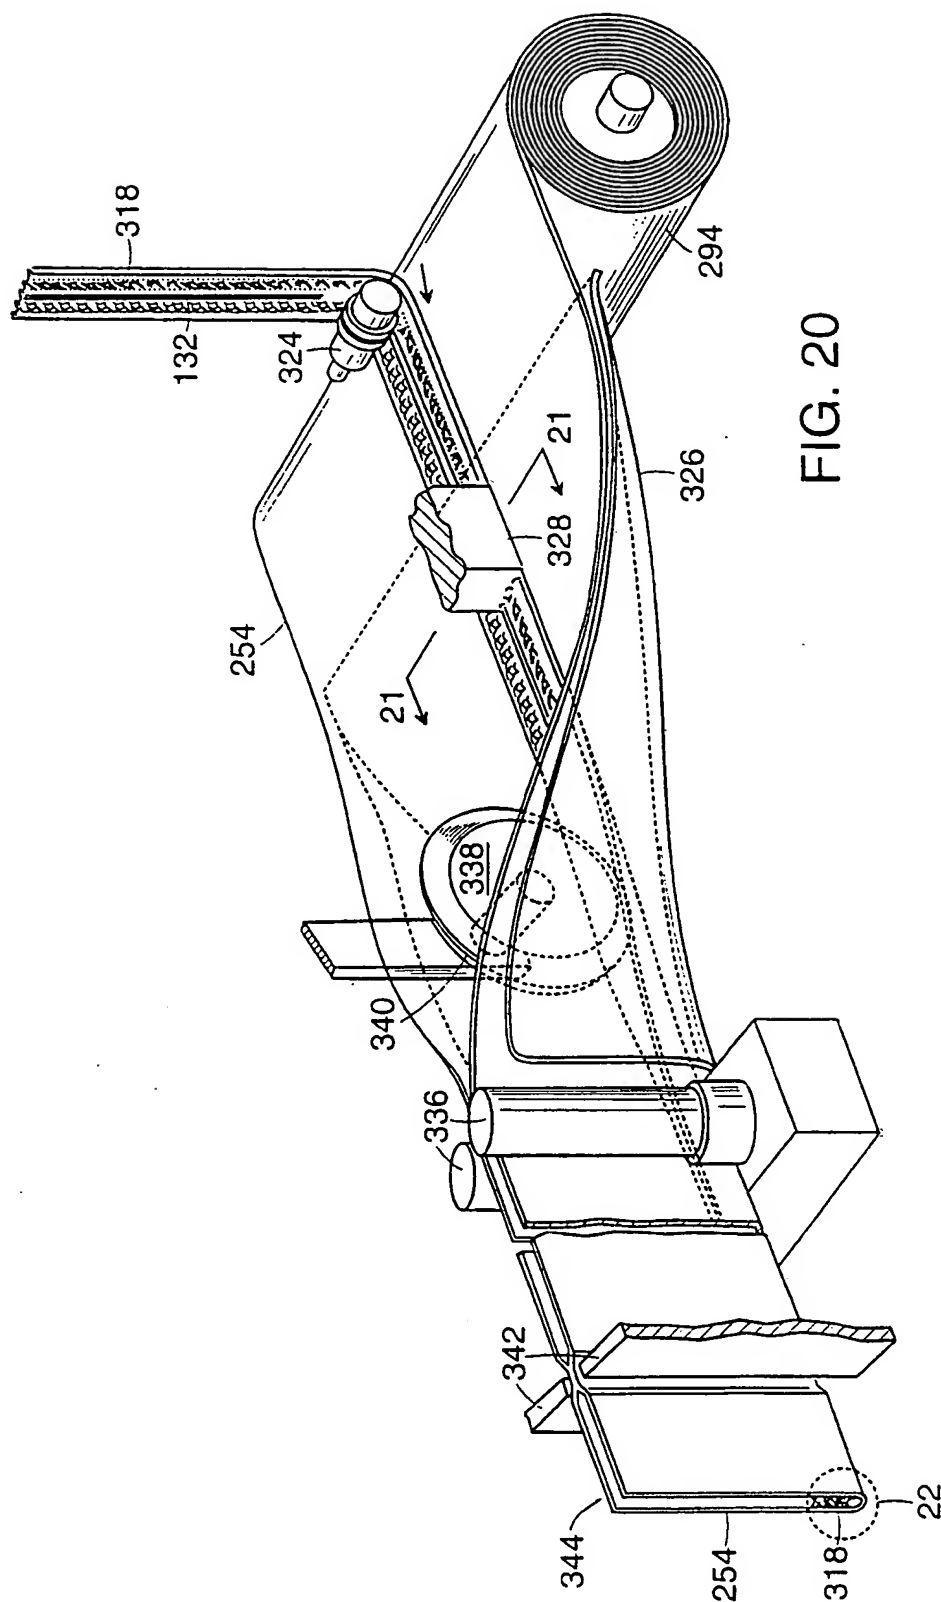


FIG. 20

15/33

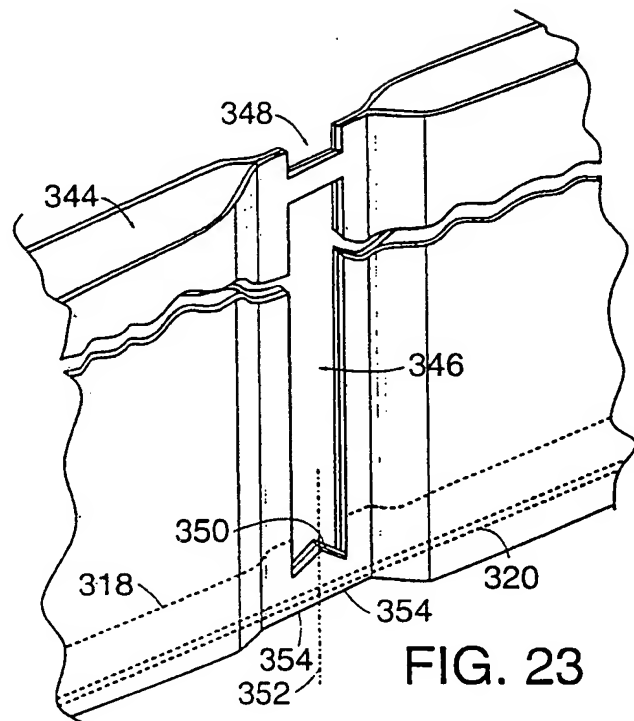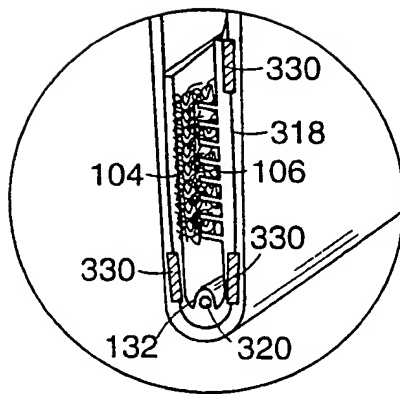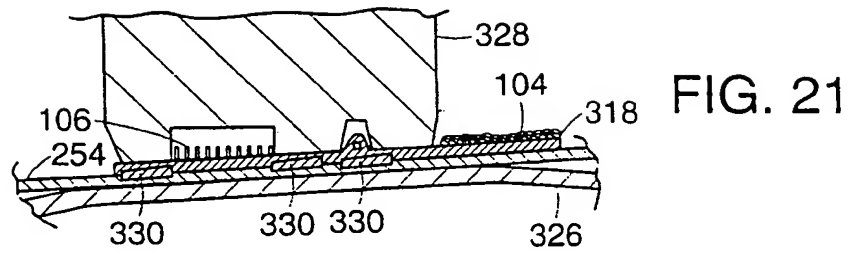

16/33

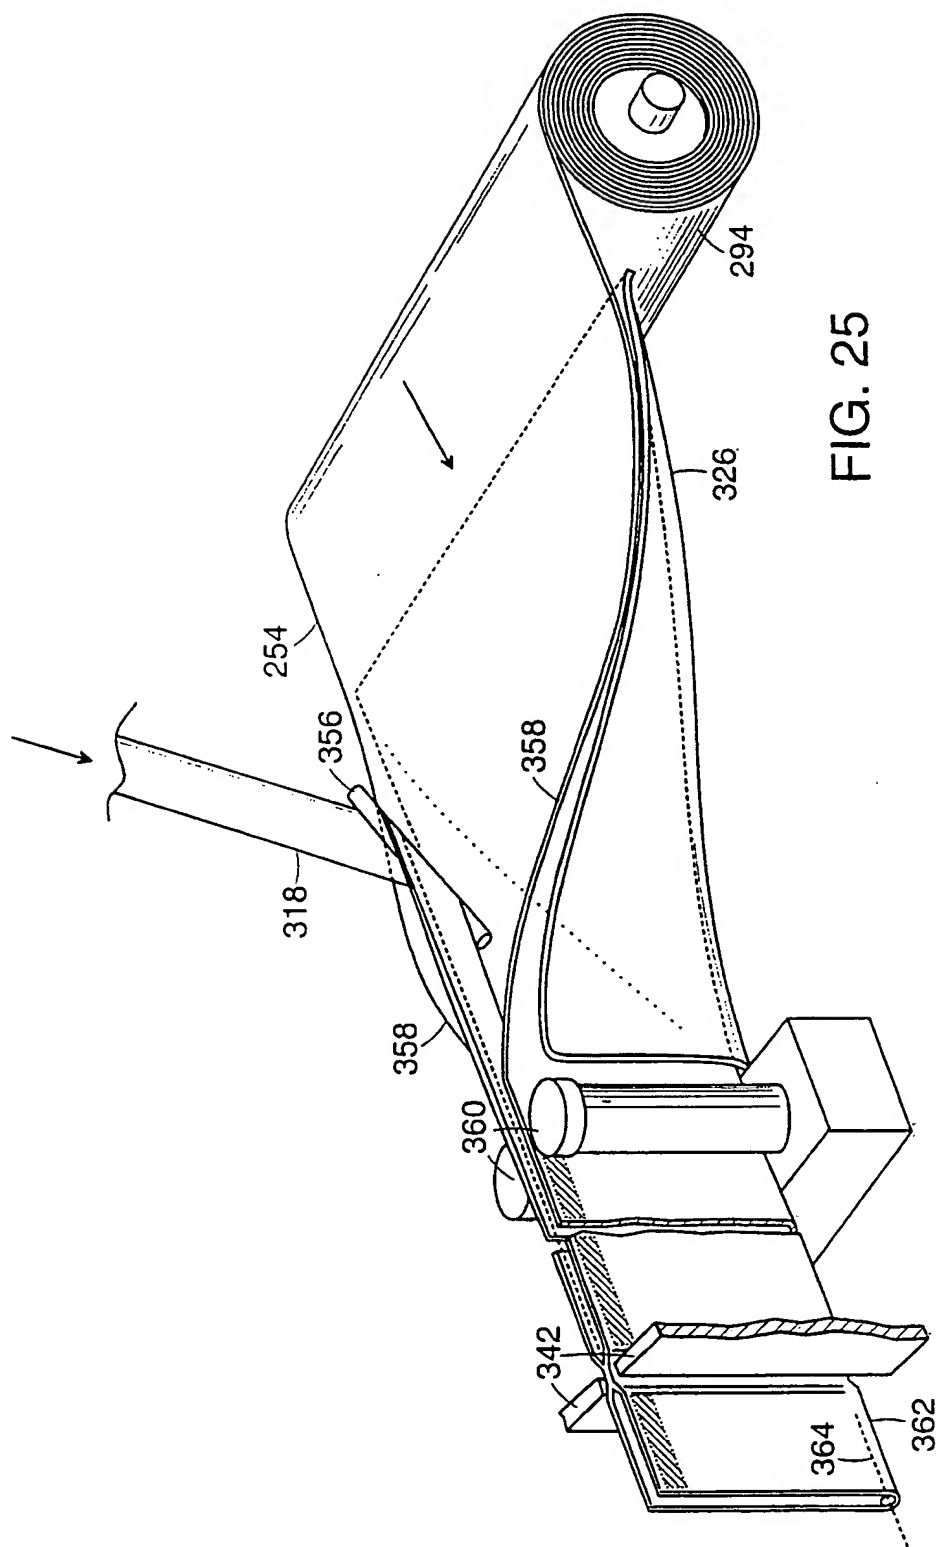


FIG. 25

17/33

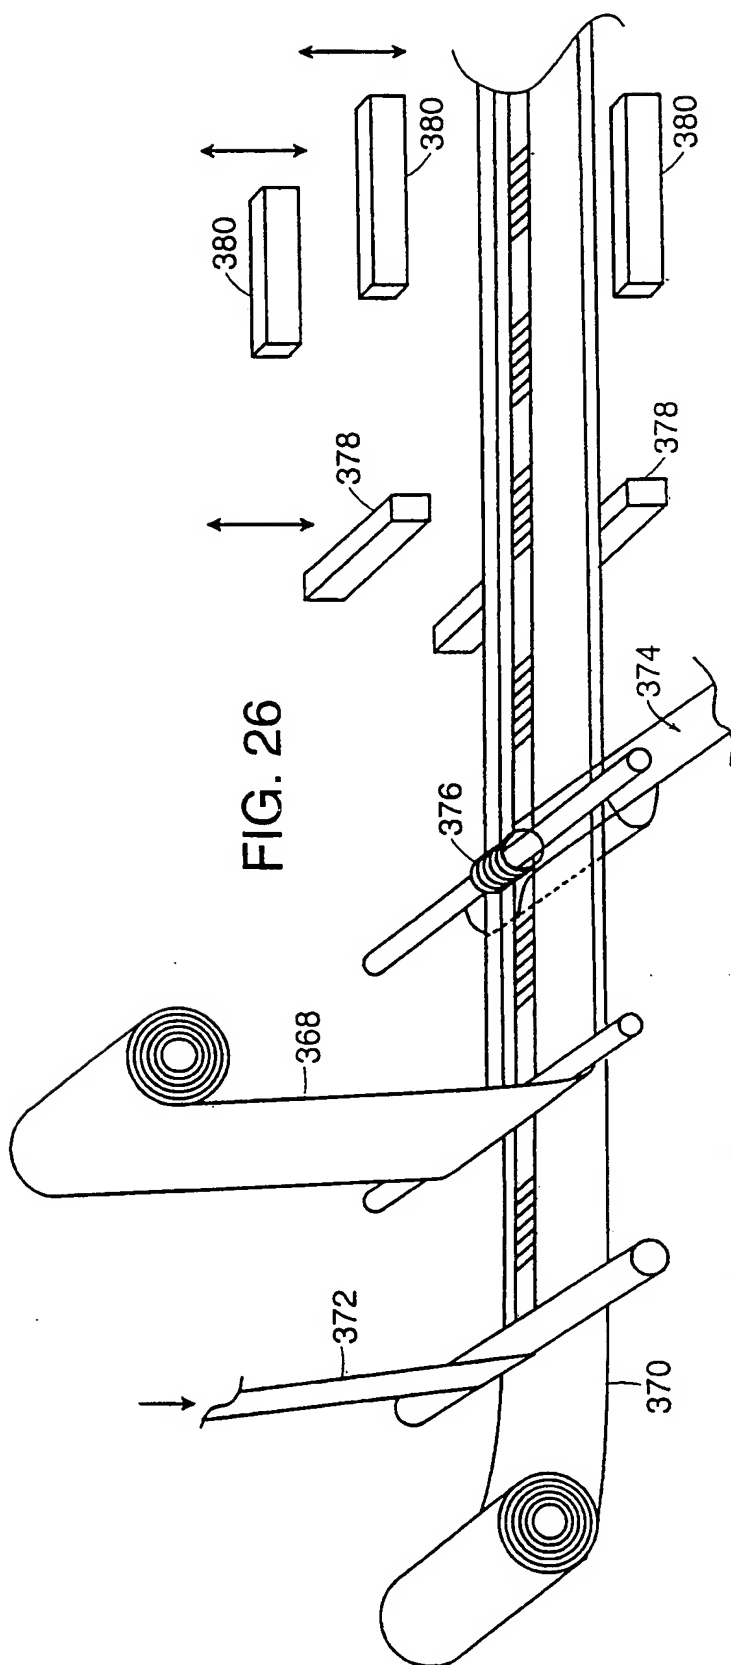


FIG. 26

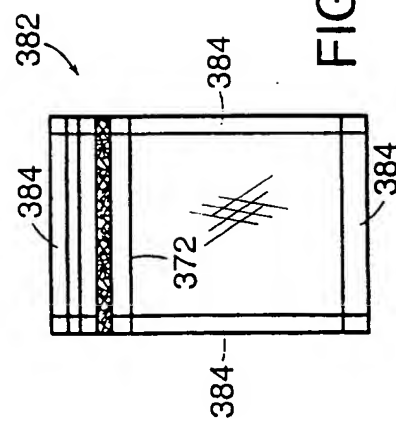


FIG. 26A

18/33

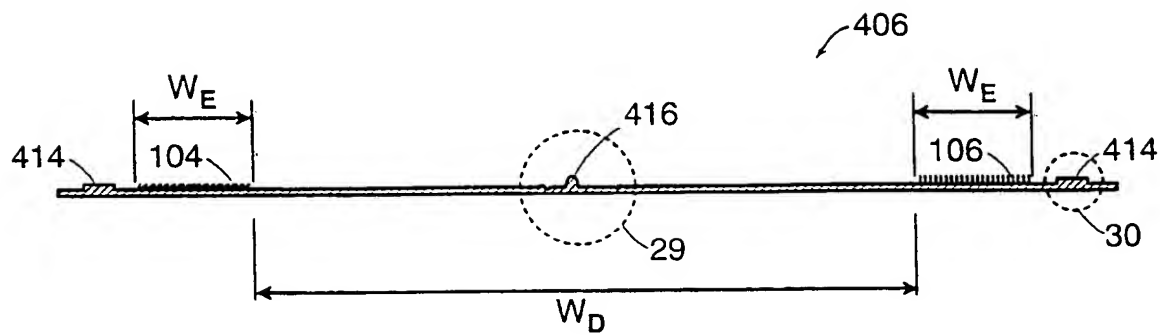


FIG. 28

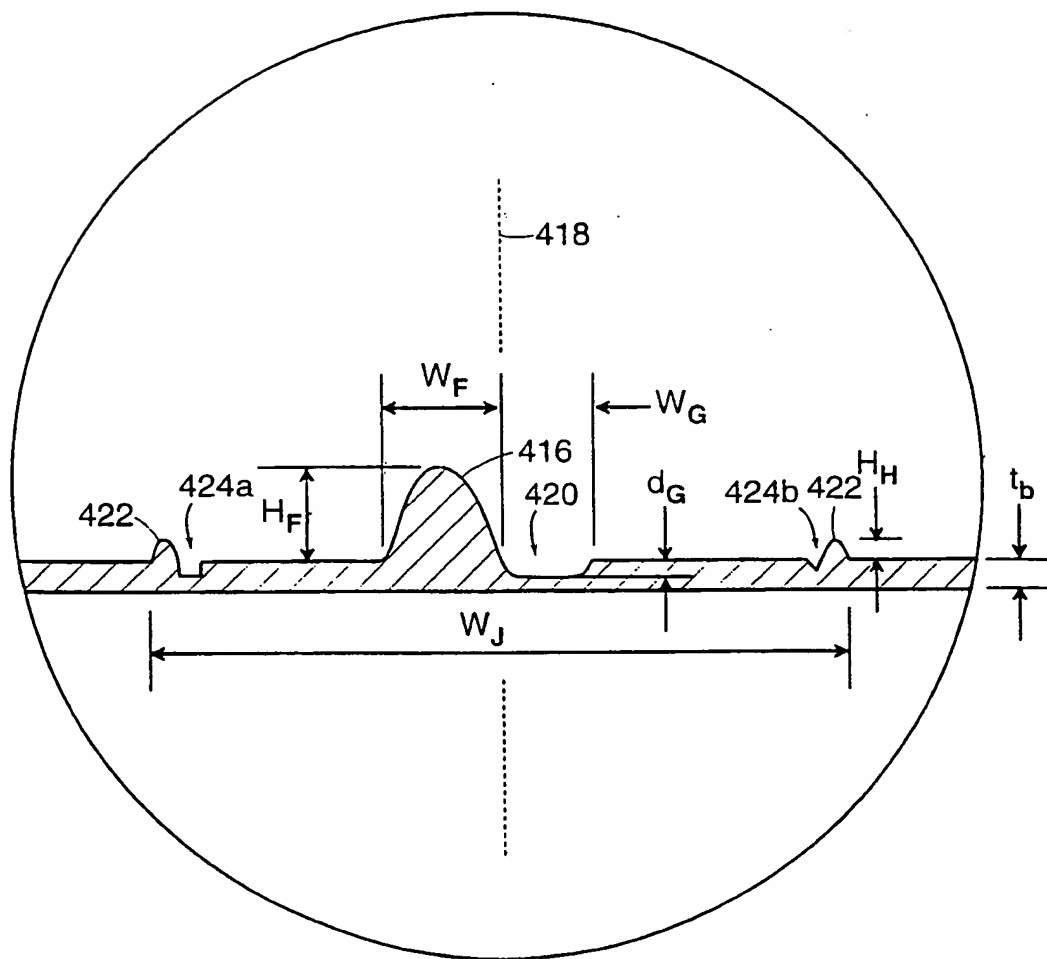


FIG. 29

19/33

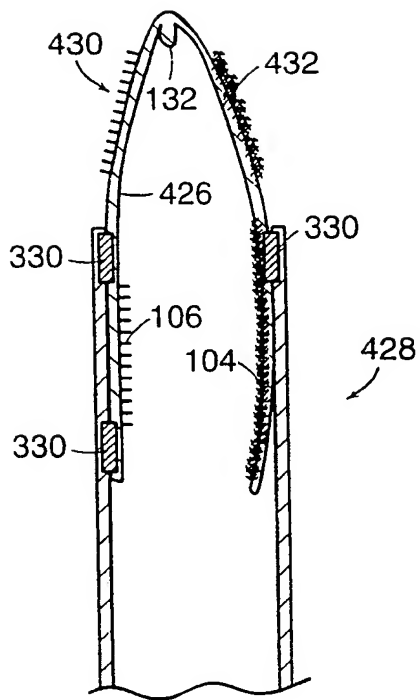


FIG. 31

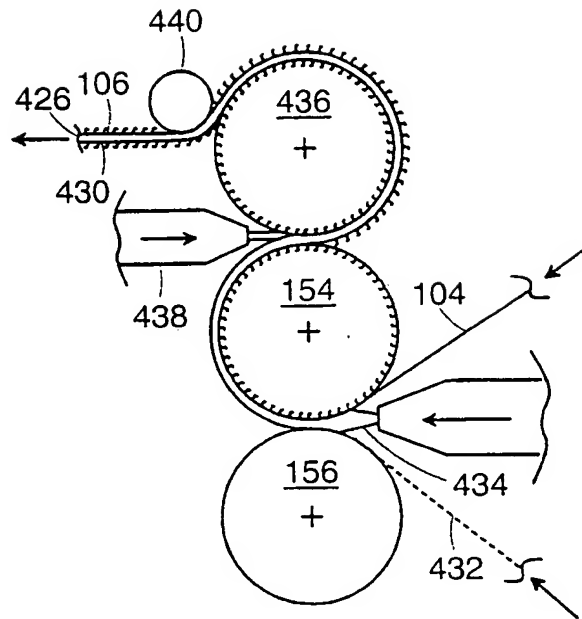


FIG. 32

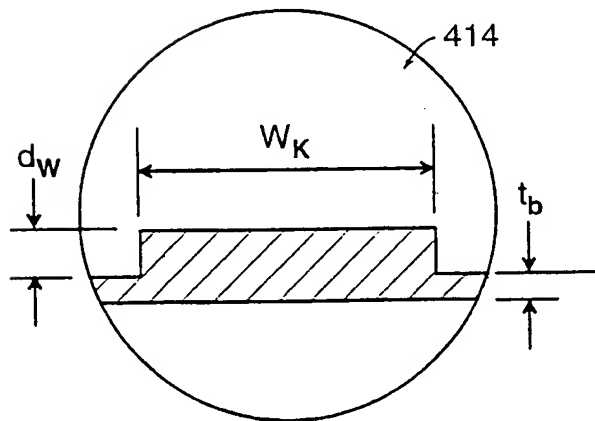


FIG. 30

20/33

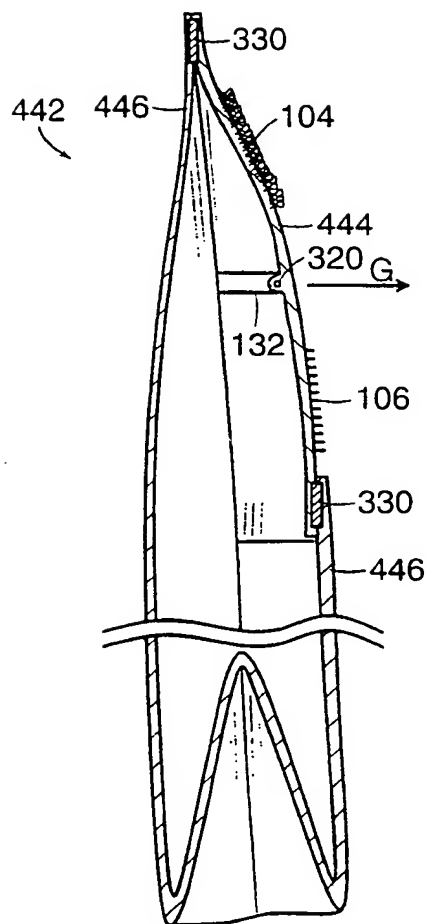


FIG. 34A

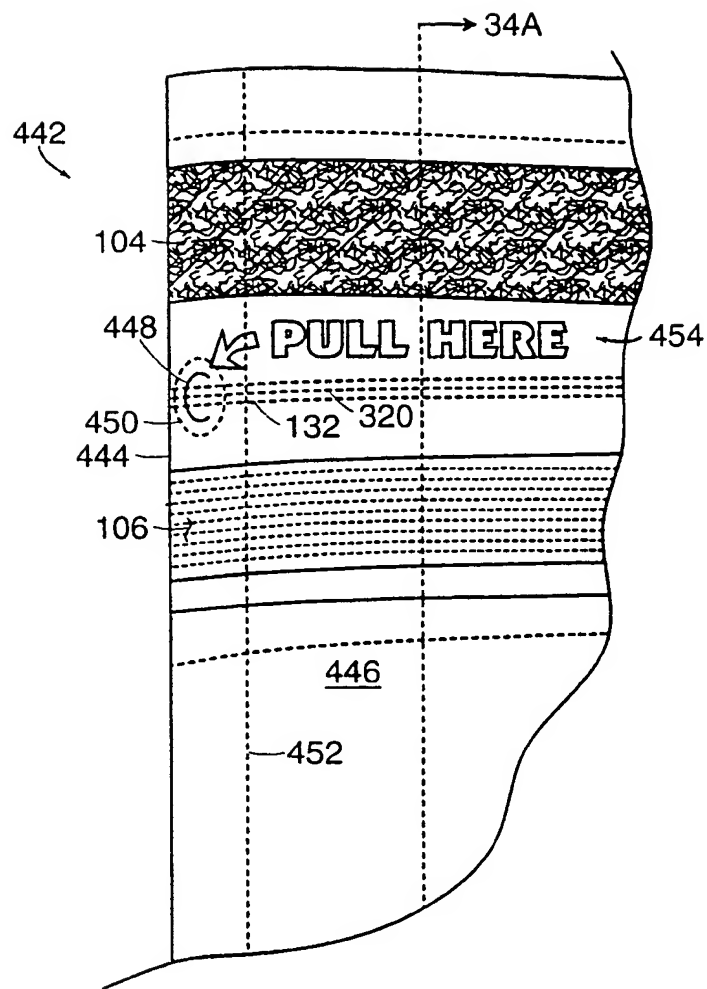


FIG. 33

21/33

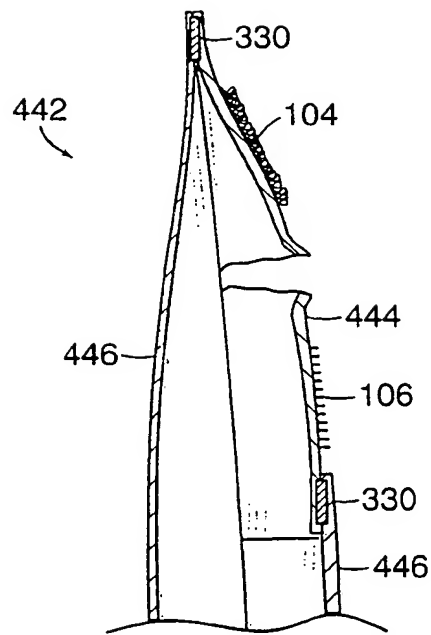


FIG. 34B

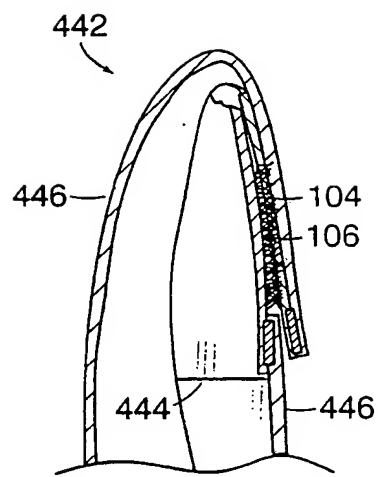


FIG. 34C

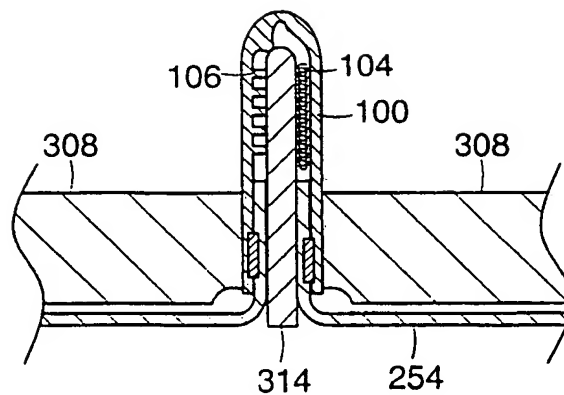


FIG. 18A

22/33

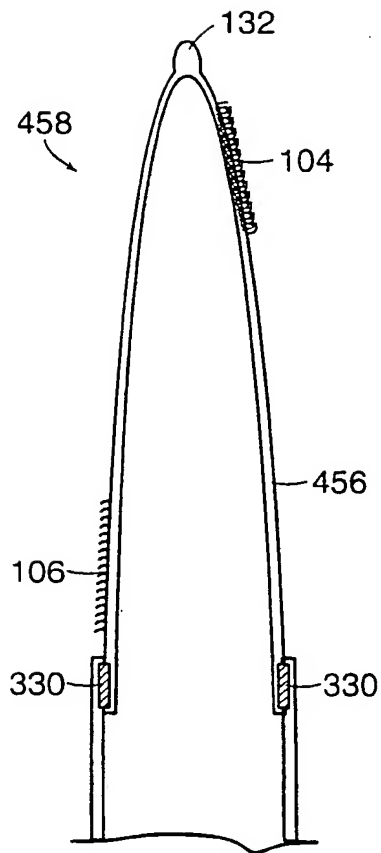


FIG. 35A

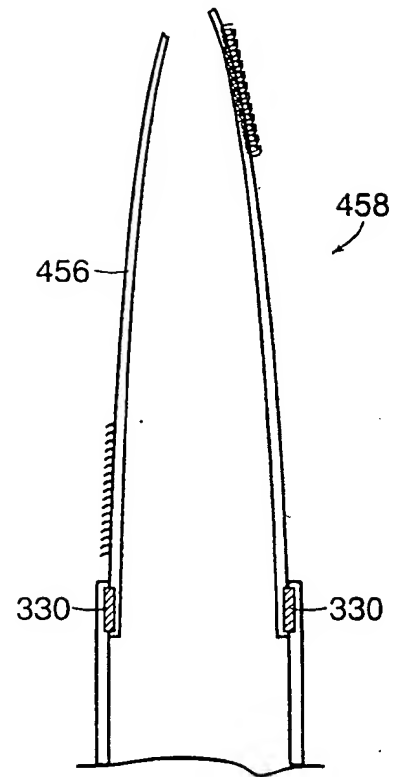


FIG. 35B

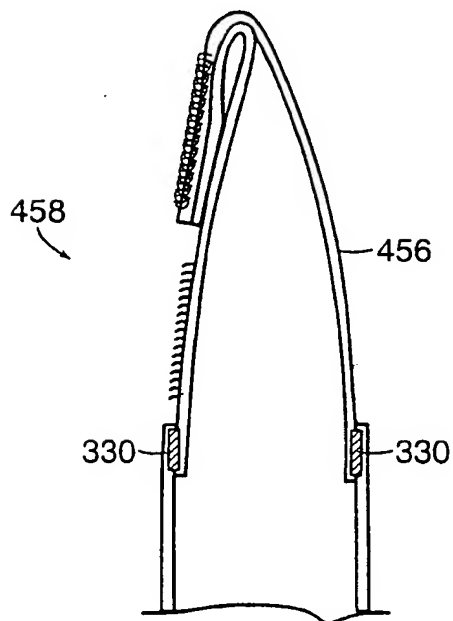


FIG. 35C




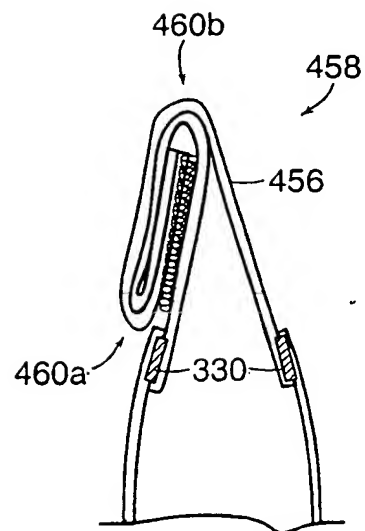


FIG. 35D

23/33

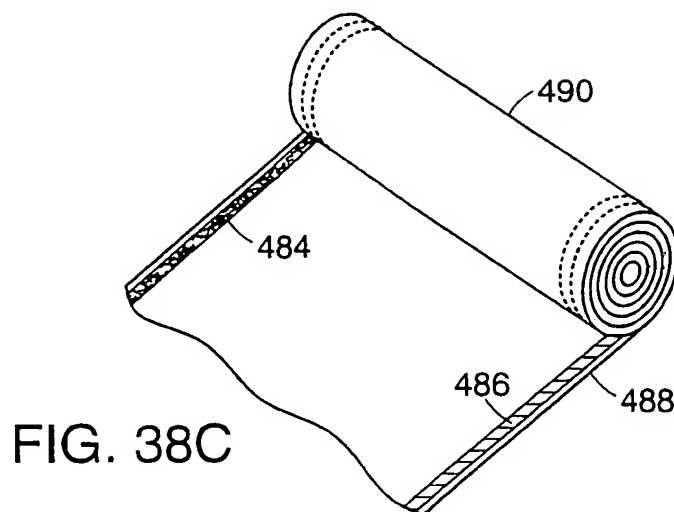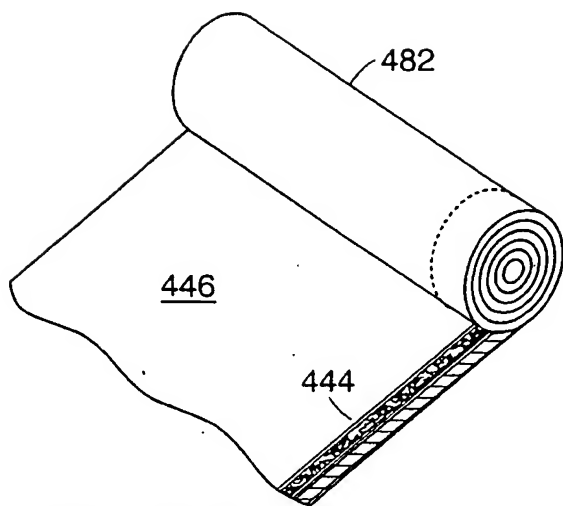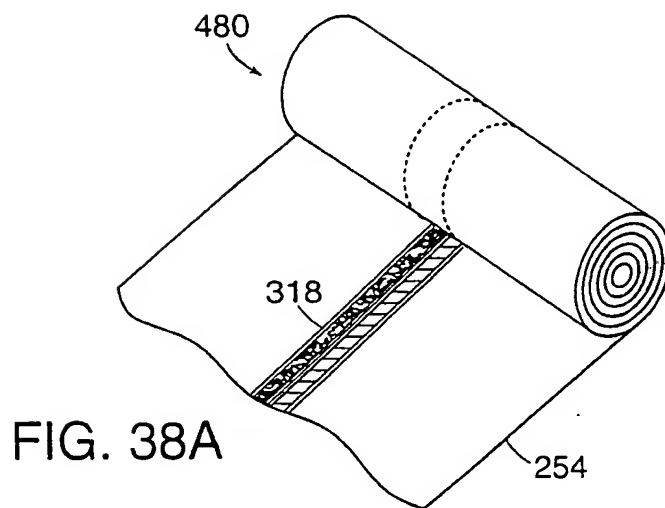

24/33

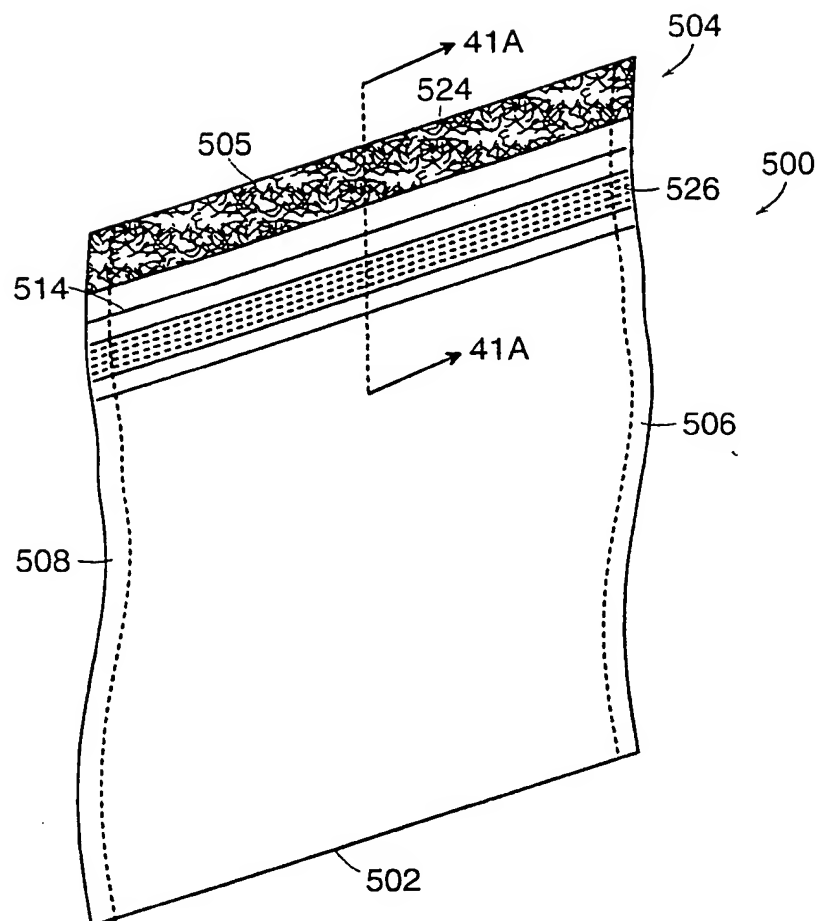


FIG. 39

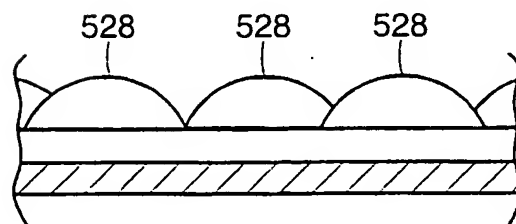


FIG. 44

25/33

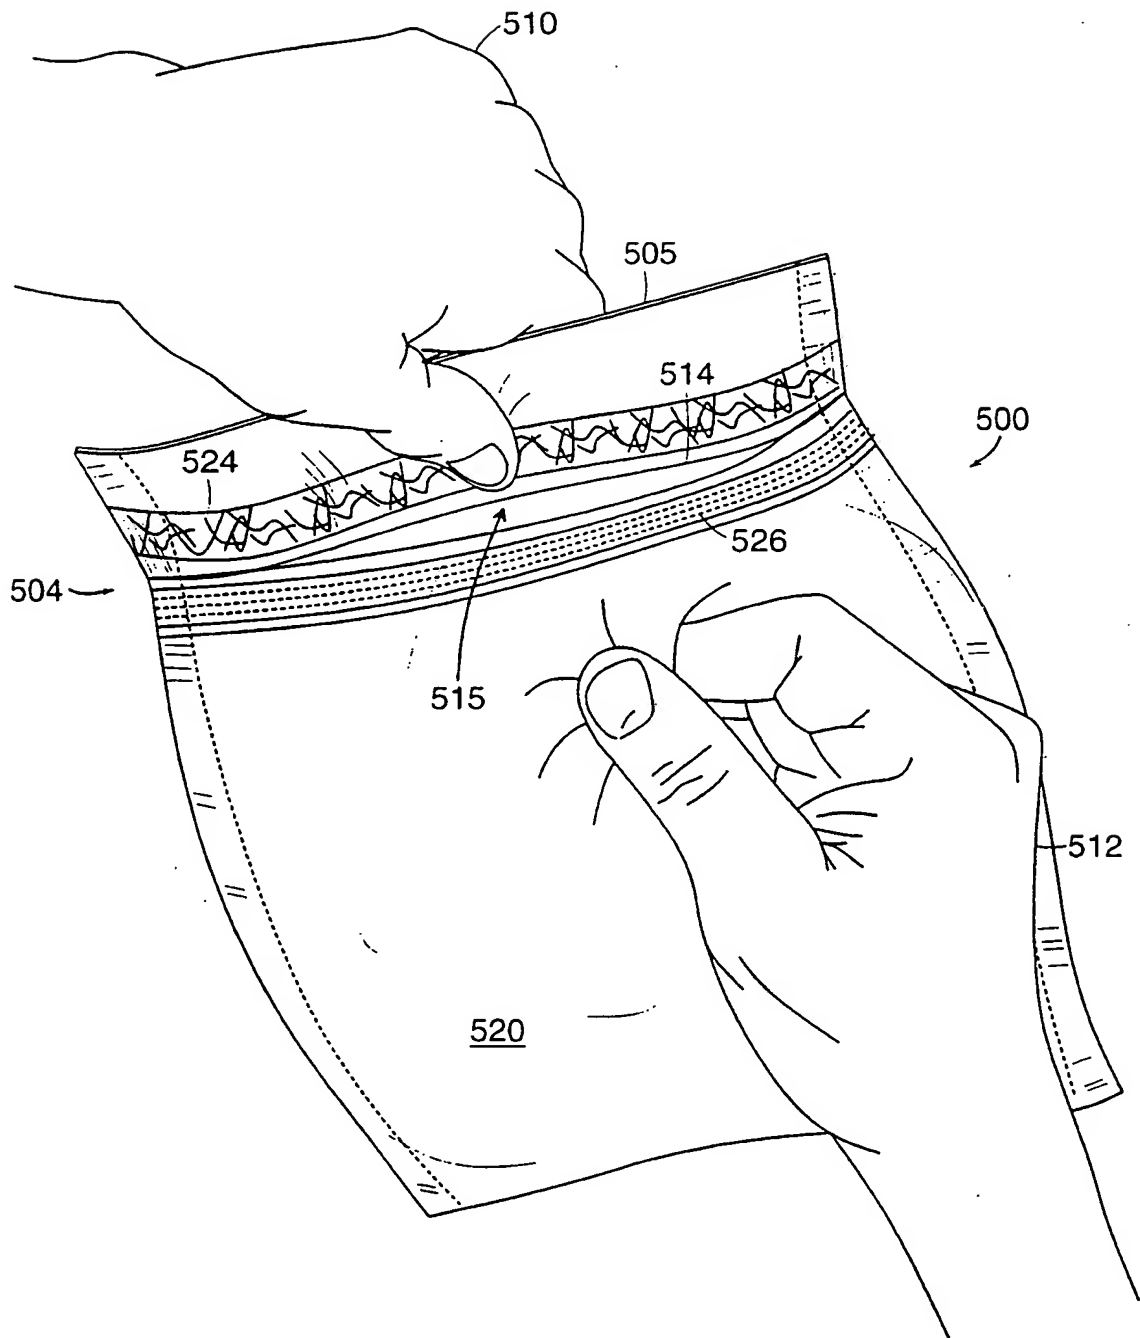


FIG. 40

26/33

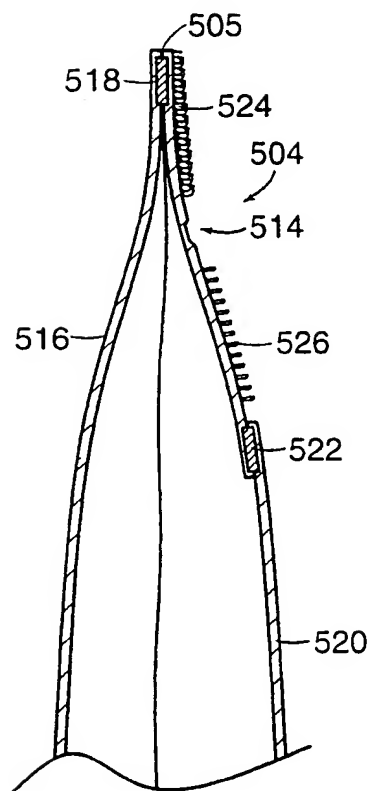


FIG. 41A

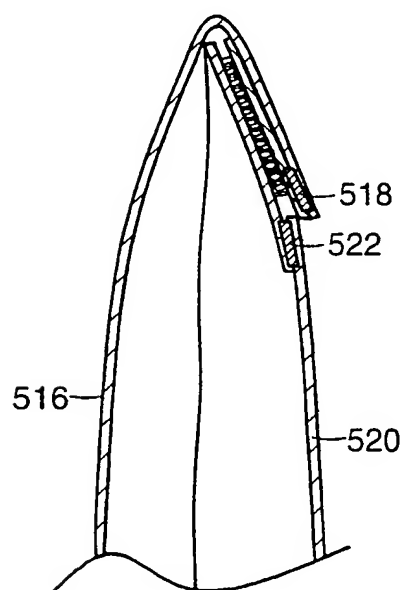


FIG. 41B

27/33

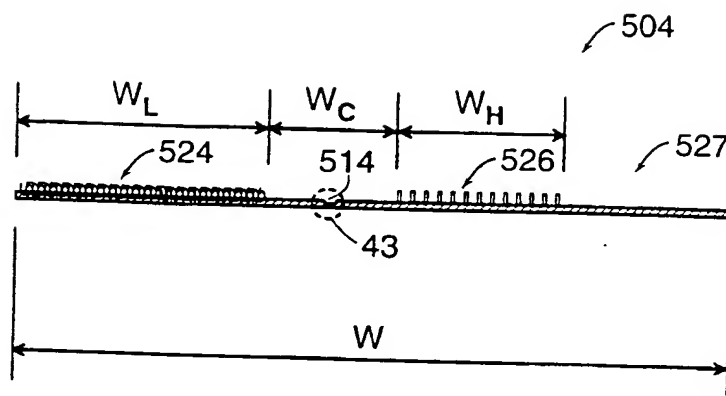


FIG. 42

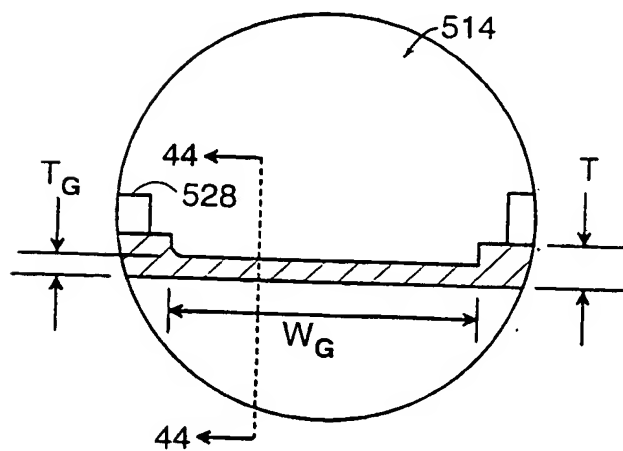


FIG. 43